
Trellick Tower Clubroom Window Schedule

TTC-IDK-P-9-003

Date	240707	
Revision	T1	
Author	IDK	

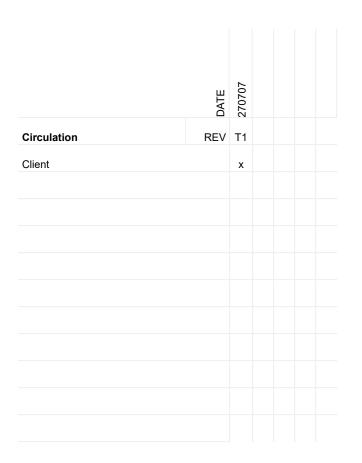

Cover Sheet

TTC-IDK-P-9-003 - Window Schedule

window ref.	Elevation	window type	location	description	structural opening	locking	ventilation	Opening	glazing	NBS Reference	other
W.1.02/04/06/08/10/12 /29/31/33/35/37/39	NORTH SOUTH	A	01.01 CLUBROOM	W20 STEEL WINDOW FIXED	To survey	-	N/A	-	double glazed unit to achive part L external panes toughened for security	L10/310	Final structural opening to be surveyed by window manufacturer prior to fabrication
W.1.01/03/05/0709/11/ 13/28/30/32/34/36/38/ 40	NORTH SOUTH	В	01.01 CLUBROOM	W20 STEEL WINDOW OPERABLE	To survey	SINGLE POINT	N/A	centre pivot	double glazed unit to achive part L external panes toughened for security	L10/310	Final structural opening to be surveyed by window manufacturer prior to fabrication
W.1.16/18/19/20/21/22 /23/25	WEST	С	01.01 CLUBROOM	W20 STEEL WINDOW FIXED	To survey		N/A	-	double glazed unit to achive part L external panes toughened for security	L10/310	Final structural opening to be surveyed by window manufacturer prior to fabrication
W.1.15/17//24/26	WEST	D	01.01 CLUBROOM	W20 STEEL WINDOW OPERABLE	To survey	SINGLE POINT	N/A	centre pivot	double glazed unit to achive part L external panes toughened for security	L10/310	Final structural opening to be surveyed by window manufacturer prior to fabrication
W.1.14/27	WEST	E	01.01 CLUBROOM	W20 STEEL WINDOW FIXED - CURVED	To survey	-	N/A	-	double glazed unit to achive part L external panes toughened for security	L10/310	Final structural opening to be surveyed by window manufacturer prior to fabrication