

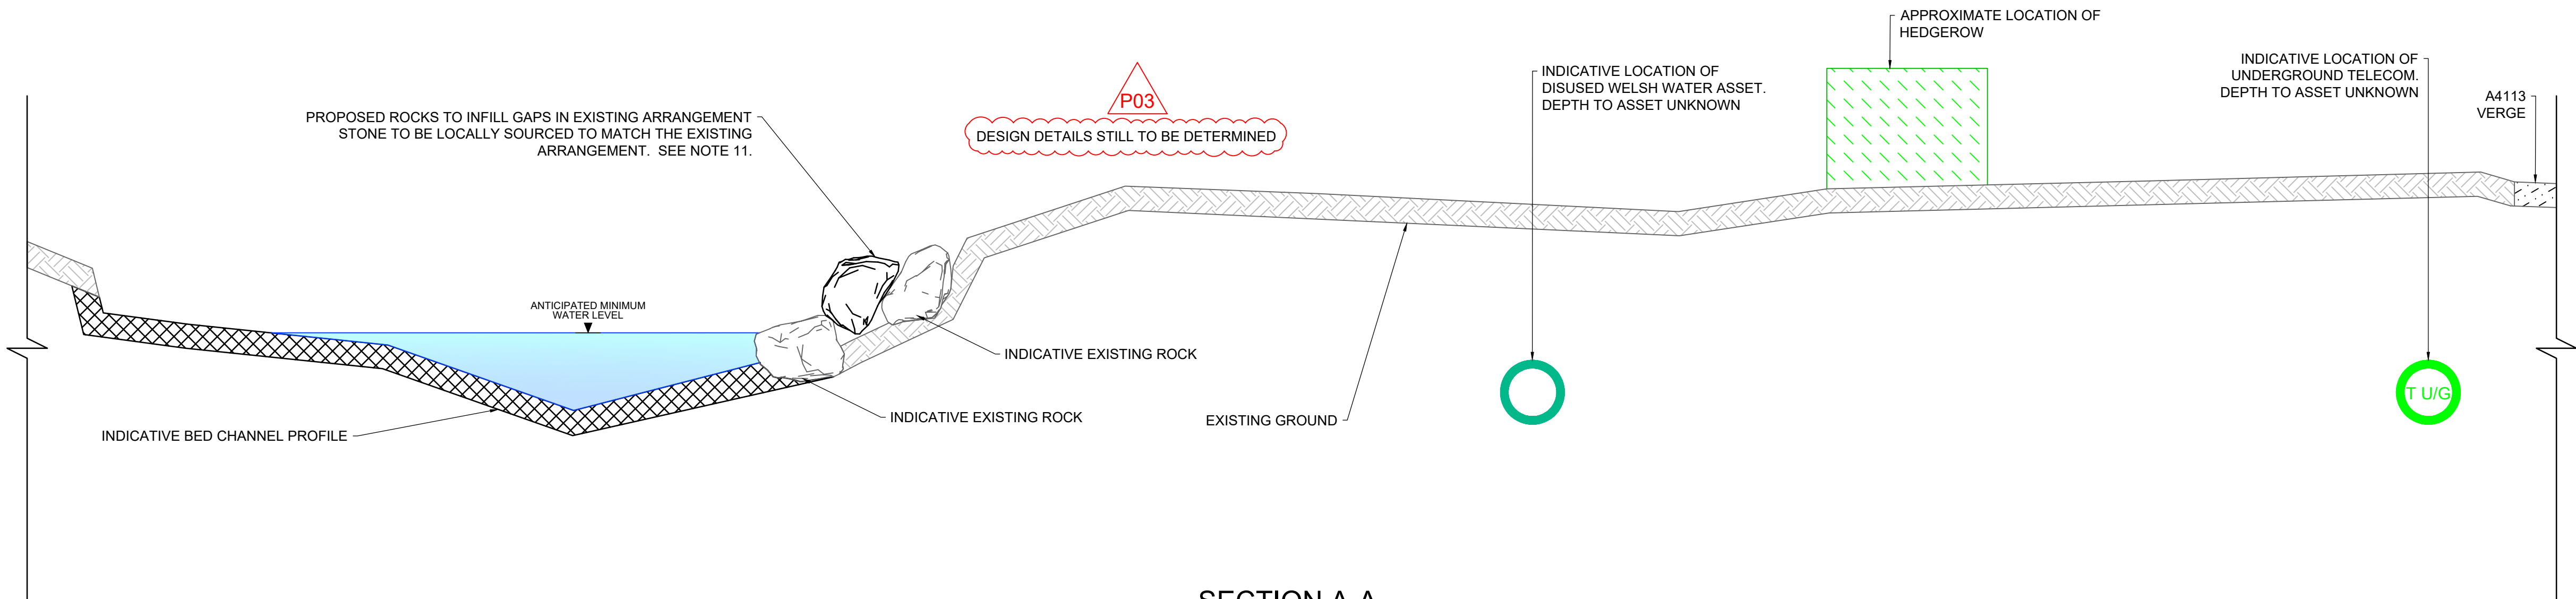


File name \\UK.WSPGROUP.COM\CENTRAL DATA\PROJECTS\70108XXX\70108764 - RIVER TEME LEINTWARDINE\03 WIP\CIVIL ENGINEERING\04 WIP\01 CAD\70956509-WSP-WRE-00-DR-CW-3003-P02.DWG, printed on 17 January 2025 09:55:01, by MacTavish, Andrew

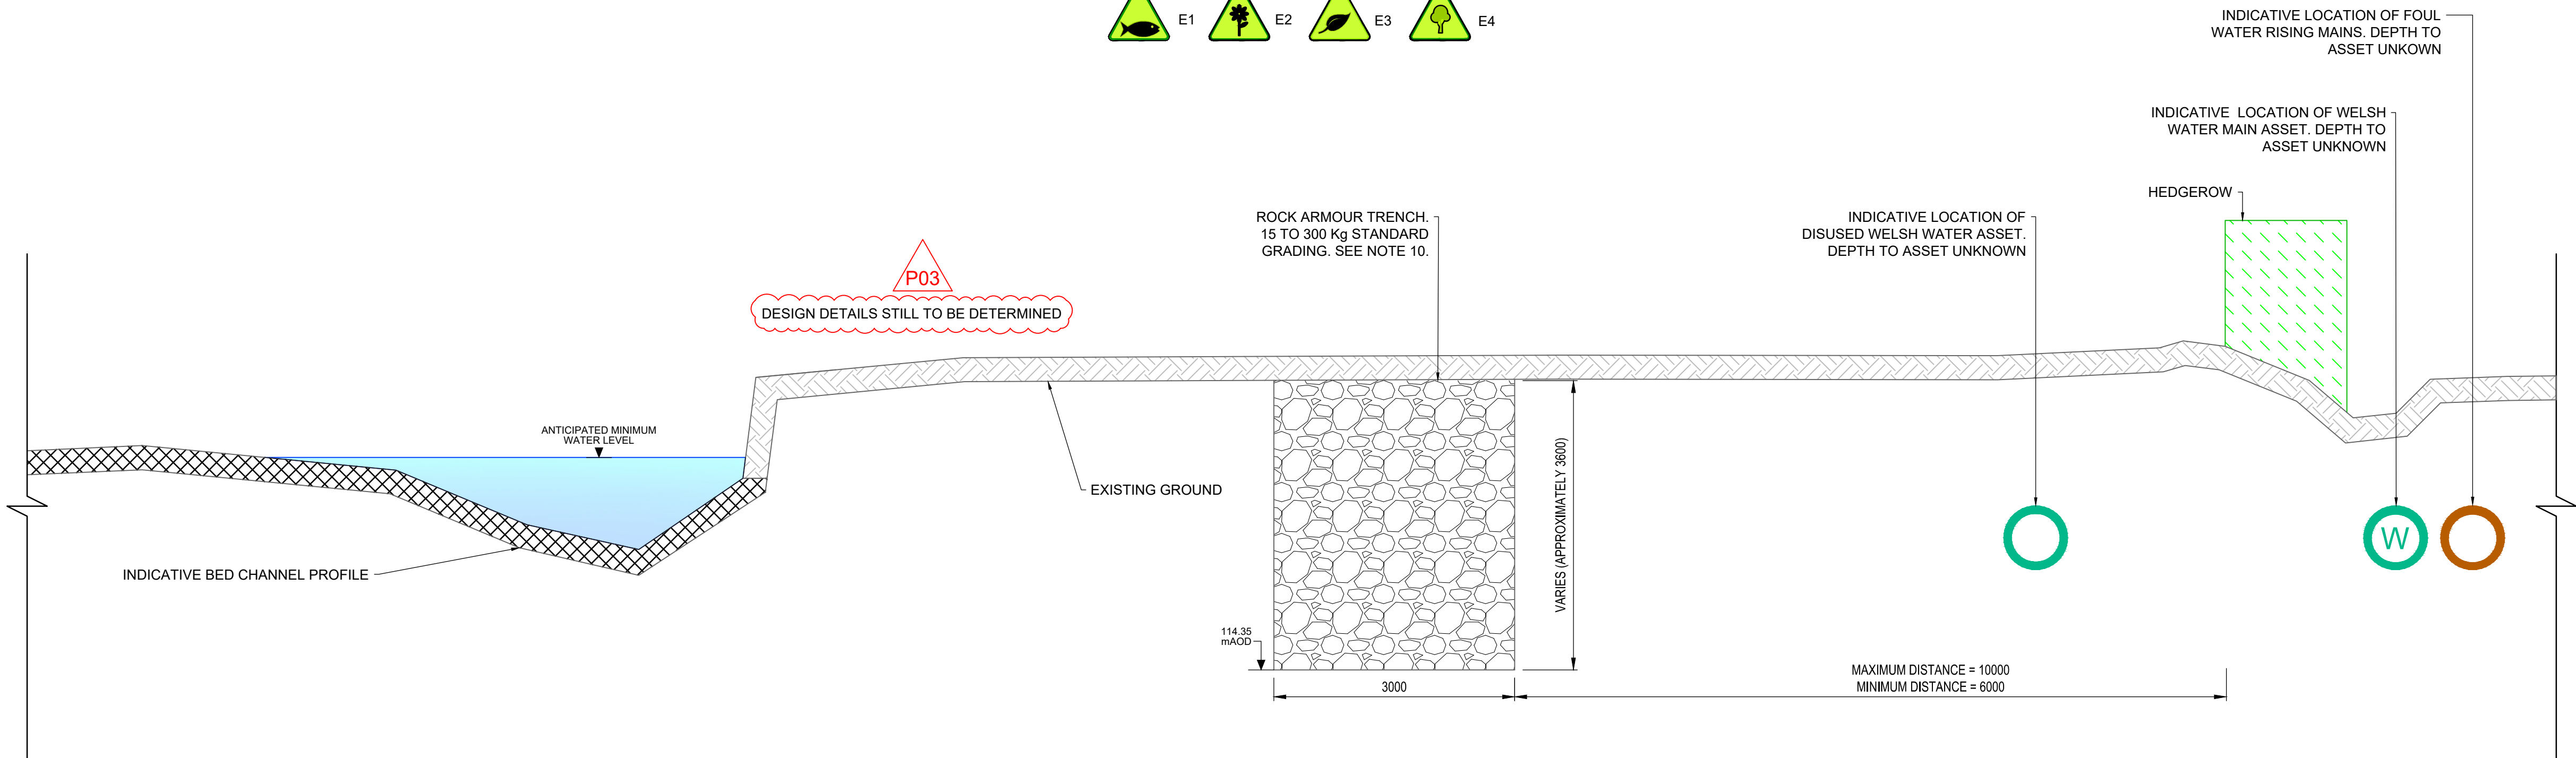


SECTION A-A

SCALE 1: 50 @ A1
SCALE 1: 100 @ A3

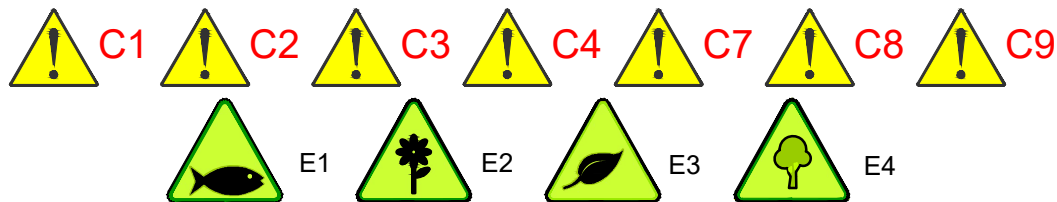

SECTION B-B

SCALE 1: 50 @ A1
SCALE 1: 100 @ A3

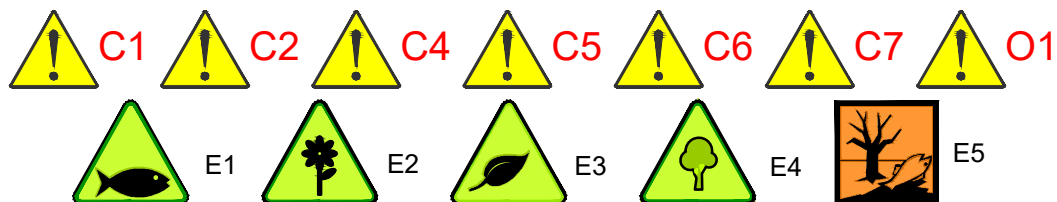

SAFETY, HEALTH AND ENVIRONMENTAL INFORMATION

NOTES BELOW ARE ADDITIONAL TO HAZARDS/RISKS NORMALLY ASSOCIATED WITH THIS TYPE OF WORK.

CONSTRUCTION

| | |
|----|--|
| C1 | EXISTING ABANDONED MAIN |
| C2 | UNDERGROUND UTILITIES |
| C3 | ACCESS POINT OFF A ROAD |
| C4 | RISK OF FLOODING |
| C5 | SHALLOW ROCKHEAD AND HIGH GROUNDWATER ANTICIPATED - RISK OF UNSTABLE EXCAVATIONS |
| C6 | UNKNOWN GROUND CONDITIONS - RISK OF UNSTABLE EXCAVATIONS |
| C7 | POTENTIALLY UNSTABLE WATERCOURSE BANKS - RISK OF FAILURE DUE TO LOADING |
| C8 | LARGE INDIVIDUAL BOULDERS TO BE MANEUVERED INTO PLACE |
| C9 | TRAFFIC AT JUNCTION BETWEEN A4110 AND A4113 |

OPERATIONS & MAINTENANCE


| | |
|----|--|
| O1 | RISK OF ROCK TRENCH COLLAPSE DUE TO FUTURE MIGRATION OF RIVER AND SURCHARGE DUE TO VEHICLE LOADING |
|----|--|

DISMANTLING / DEMOLITION (FUTURE)

| | |
|-----|-----|
| N/A | N/A |
|-----|-----|

REFER TO THE GENERAL NOTES, THE SCHEDULE OF SIGNIFICANT RESIDUAL RISKS (T447) AND THE PRINCIPAL CONTRACTOR FOR MORE INFORMATION.

KEY:

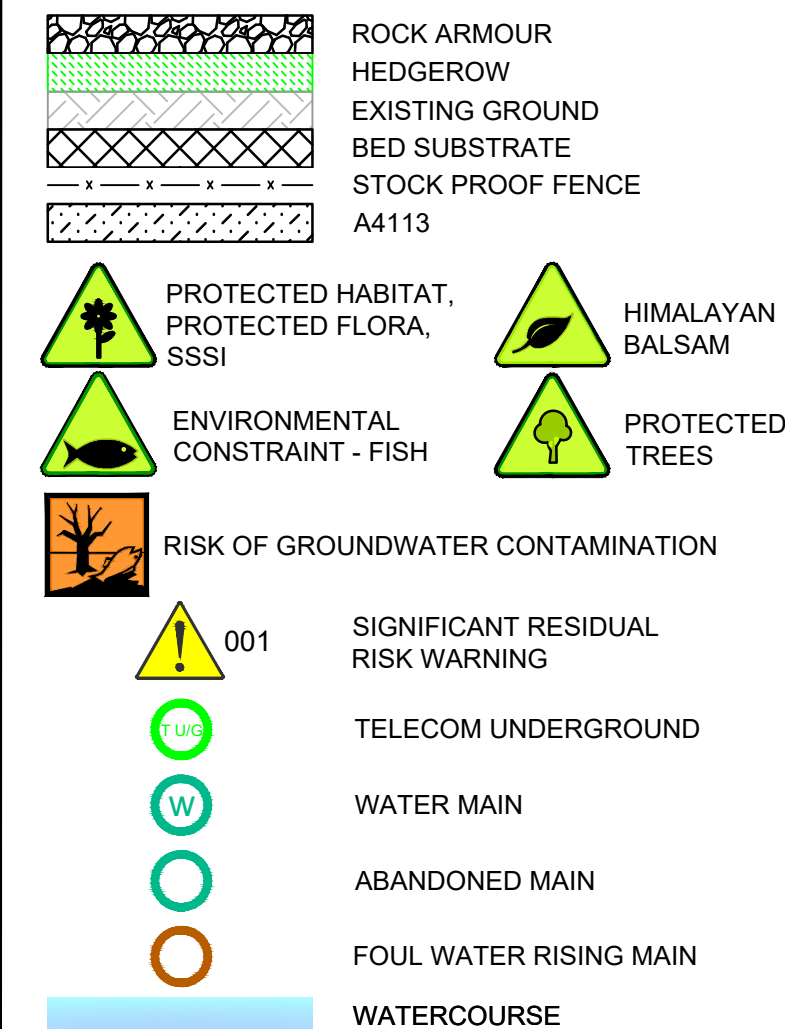

DO NOT SCALE

NOTES:

1. ALL DIMENSIONS ARE IN MILLIMETRES (mm) AND ALL LEVELS ARE IN METRES ABOVE ORDNANCE DATUM (mAOD) UNLESS STATED OTHERWISE.
2. DIMENSIONS AND LEVELS SHALL BE VERIFIED BY THE CONTRACTOR PRIOR TO COMMENCEMENT OF THE WORKS.
3. THIS DRAWING SHOULD BE READ IN CONJUNCTION WITH THE FOLLOWING

70108764-WSP-WRE-00-DR-CW-1001
70108764-WSP-WRE-00-DR-CW-1002
70108764-WSP-WRE-00-DR-CW-1003
70108764-WSP-WRE-00-DR-CW-2002
70108764-WSP-WRE-00-DR-CW-2003
70108764-WSP-WRE-00-DR-CW-3004
4. STOCK FENCING RECOMMENDED FOR THE DURATION OF THE ESTABLISHMENT PERIOD OF THE NEW TREES / SHRUBS. THIS IS SUBJECT TO AGREEMENT WITH LANDOWNER.
5. ALL PIPES SIZES AND DEPTHS ARE INDICATIVELY DRAWN AND AT AN APPROXIMATE LOCATION.
6. MINIMUM OF 4m STANDOFF DISTANCE TO BE KEPT BETWEEN EXTENT OF ALL FINISHED BANK PROTECTION WORKS AND DCWW's LIVE ASSETS
7. CONSTRUCTION TRAFFIC WITHIN THE VICINITY OF LIVE MAINS TO BE DISCUSSED WITH DCWW IN ADVANCE TO ASSESS POTENTIAL IMPACT OF INCURSION
8. WATCHING BRIEF BY DCWW MAY BE REQUIRED DURING CONSTRUCTION
9. FULL UNFETTERED ACCESS TO DCWW ASSETS TO BE MAINTAINED IN PERPETUITY AND ALL H&S ACCESS/EGRESS REQUIREMENTS TO BE AGREED IN ADVANCE OF THE COMMENCEMENT OF THE PROPOSED WORKS
10. ROCK ARMOUR GRADING LMA15/300 SPECIFIED IN ACCORDANCE WITH TABLE 2 OF BS EN 13383-1:2002. ROCK ARMOUR TO BE TESTED IN ACCORDANCE WITH BS EN 13383-2:2019 AND RESULT SUBMITTED TO DESIGNER FOR APPROVAL PRIOR TO INSTALL. REFER TO SPECIFICATION DOCUMENT XXXXXX.
11. REQUIRED ROCK GRADING TO BE CONFIRMED ON SITE FOLLOWING SURVEY OF EXISTING REVETMENT AND DETERMINATION OF EXISTING ROCK GRADING. MAX SIZE OF 1500mm DOLOMITE TO BE USED. REFER TO SPECIFICATION DOCUMENT XXXXXX.

| UTILITY CONFIDENCE GAUGE | |
|---|------------|
| SEARCH TYPE | DATE |
| <input checked="" type="radio"/> TYPE D (DESKTOP) | 02/05/2023 |
| <input type="radio"/> TYPE C (SITE RECON) | |
| <input type="radio"/> TYPE B (DETECTION) | |
| <input type="radio"/> TYPE A (VERIFICATION) | |

| P03 | 05/01/2025 | AM | FOR APPROVAL | JM | PW |
|-----|------------|----|----------------|-----|-----|
| P02 | 16/05/2024 | ES | FOR APPROVAL | JM | PW |
| P01 | 08/03/2024 | JM | FOR DISCUSSION | PW | |
| REV | DATE | BY | DESCRIPTION | CHK | APP |

DRAWING STATUS: B - PARTIAL SIGN OFF



7th Floor, 110 Queen St, Glasgow, G1 3BX, UK
T+ 44 (0) 141 429 3555, F+ 44 (0) 141 429 3666
wsp.com

CLIENT: HEREFORDSHIRE COUNCIL

SITE/PROJECT: RIVER TEME PHASE 2B

TITLE: TYPICAL SECTIONS

| | | |
|-------------|-----------|------------|
| SCALE @ A1: | CHECKED: | APPROVED: |
| AS SHOWN | JM | PW |
| PROJECT NO: | DESIGNED: | DRAWN: |
| 70108764 | AM | AM |
| | | DATE: |
| | | January 25 |

| | |
|--------------------------------|------|
| DRAWING No: | REV: |
| 70108764-WSP-WRE-00-DR-CW-3003 | P03 |

© WSP UK Ltd