





Wall Type Legend


- A — 60 Minute Fire Rated Partition
- B — 30 Minute Fire Rated Partition
- C — Stud Partition Dry lining

Wall Type Specification

- A** 1 layers of 15mm fireline board either side of 70mm Gypframe 'S' studs at 600mm centres. 50mm Isover APR 1200 in the cavity. - To achieve 50dB sound insulation and 60mins fire resistance. Or equal approved 
- B** 1 layers of 12.5mm wallboard either side of 70mm Gypframe 'S' studs at 600mm centres - To achieve 30mins fire resistance. Or equal approved 
- C** 1 layers of 12.5mm wallboard to one side of 70mm Gypframe 'S' studs at 600mm centres. 100mm Isover APR1200 in the cavity. Or equal approved 

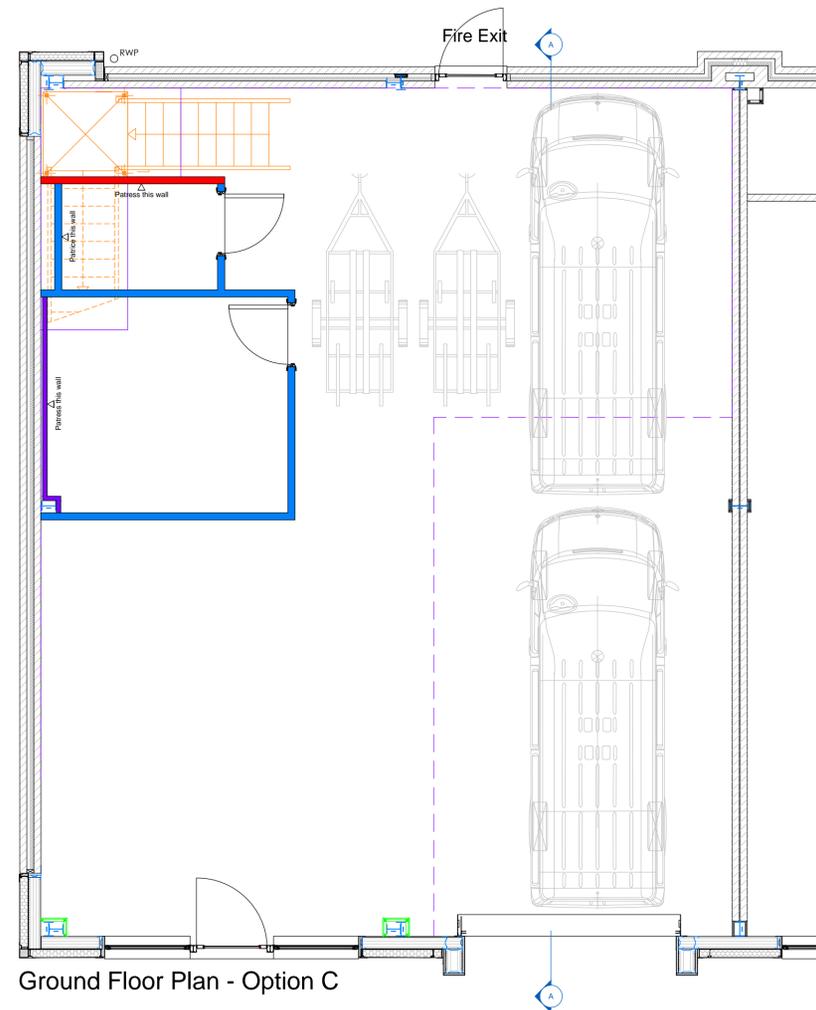

Ground Floor Plan - Option C

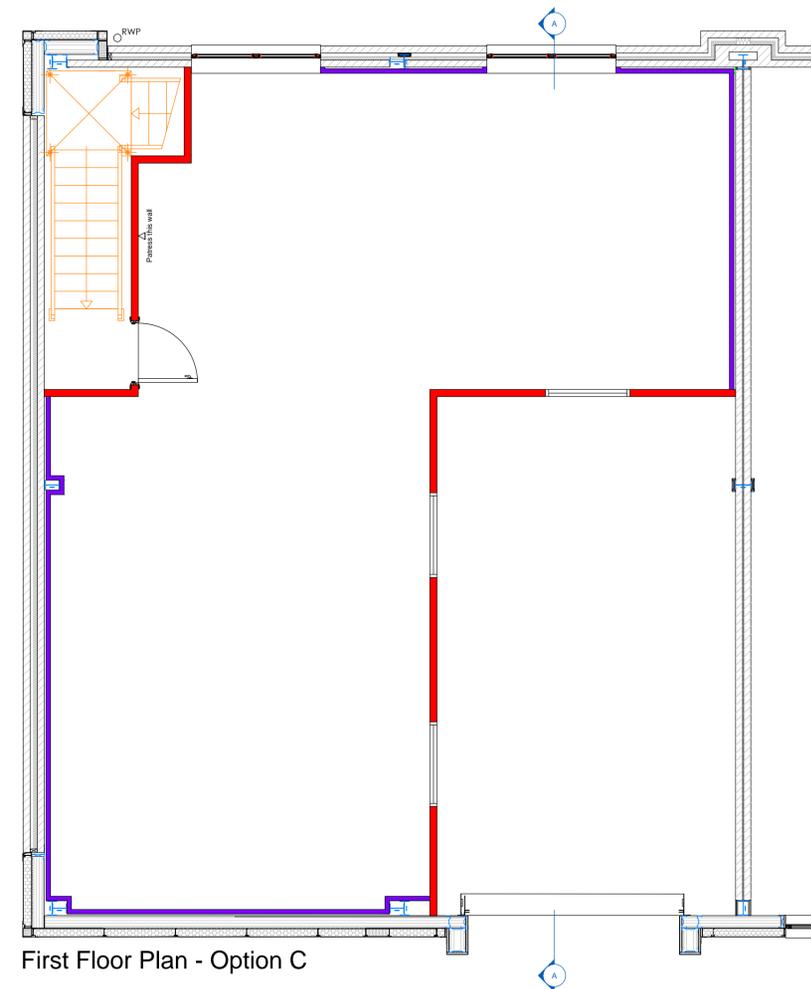

First Floor Plan - Option C

Rev	Description	By	Chk	Date
1	Original issue	CJT	CM	17.01.18



Hum Chapel, Avon Causeway, Christchurch, Dorset, BH23 6AS.
Tel: 01202 400900 Email: info@spaceindustries.co.uk
www.spaceindustries.co.uk

Client
Maritime & Coastguard Agency

Project
Winfrith COB Proposed Fit-Out

Title
Proposed Ground & First Floor Wall Construction Layouts

Project No.	Job No.	Dwg No.	Rev	A1 Scale
Q5161	B----	703	1	1:50