

LED SPECTRUM

SURFACE MOUNTED LUMINAIRES



The Spectrum offers an attractive range of surface LED luminaires with a multitude of applications.

Applications:

- Reception Areas
- Commercial Offices
- Leisure Centres
- Hospitals
- Schools, Colleges and Universities
- Corridors and Walkways
- Meeting Rooms

- Product Specifications:**
- Fitted with a reeded acrylic wrap around frosted prismatic diffuser for an even light distribution
 - Diffuser held captive within the polycarbonate injection moulded end cap for a positive fixing
 - Slim profile
 - Manufactured from mild steel with white paint finish as standard
 - Constant output driver with colour 850 as standard
- Optional Features:**
- /START:** Start of the run
 - /CONT:** Continuation of run
 - /END:** End of run

/1.5SK: 1500mm pendant suspension kit

/3SK: 3000mm pendant suspension kit


Colour Temperature Options:

/830: Colour 830

/840: Colour 840

This luminaire can be mounted singularly or as a continuous run to give an attractive design with a slim profile that neatly blends into any installation. For plug and play information see page 170.

Occupancy and daylight sensor options available on this product

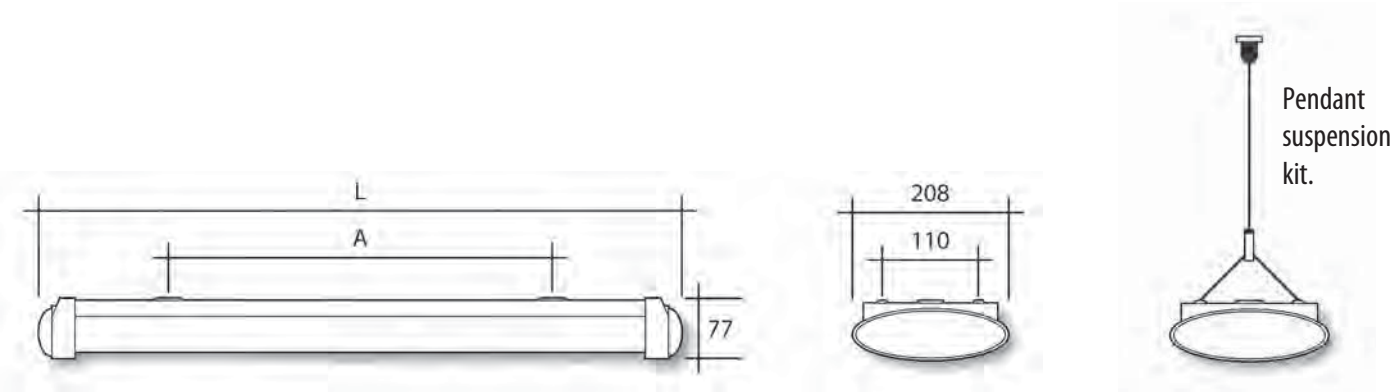


Order Codes

LED Spectrum	Lumens	Watts	Length	Width	Height	Fixing
SPE 11/2/CO/850	1361	11	695	208	77	460
SPE 22/3/CO/850	2722	22	1095	208	77	600
SPE 22/4/CO/850	2722	22	1295	208	77	600
SPE 33/5/CO/850	4083	33	1595	208	77	1200
SPE 33/6/CO/850	4083	33	1895	208	77	1200
SPE 22/2T/CO/850	2722	22	695	208	77	460
SPE 44/3T/CO/850	5444	44	1095	208	77	600
SPE 44/4T/CO/850	5444	44	1295	208	77	600
SPE 66/5T/CO/850	8166	66	1595	208	77	1200
SPE 66/6T/CO/850	8166	66	1895	208	77	1200

Test on **SPE66/5T/CO/850** gave a result of 6190 luminaire lumens which delivers 76% light output ratio.

LED Spectrum part code formula example:

Product Family	Watts	Body Style	Gear Option	Optional Feature	Colour Temp	Emergency Option
SPE	66	5T	DL	3SK	830	M3

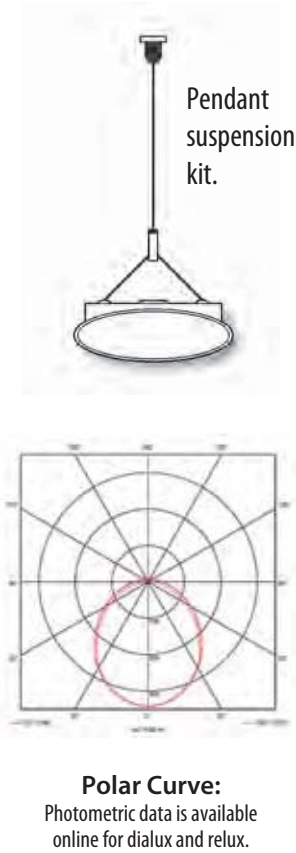

- Gear Options:**
- /AD:** 1-10V Analogue dimming
 - /DL:** Dali addressable dimming
- Emergency Options:**
- /M3:** 3hr maintained emergency
- Installation options:**
- | | |
|------------------|------------|
| Exposed T | NO |
| Plasterboard | NO |
| Metal Pan | NO |
| Surface | YES |
| Suspended | YES |