



# Duct+ System

# Duct+ System

Integrated Panelling System supplied complete with frames

## Specification:

### Panel Options::

HPL Core/Face: High density particleboard faced 1 side with high pressure laminate and balancer on reverse giving 18mm nominal thickness  
Edge: Matching 2mm thick impact resistant ABS lipping  
Shadow Strips: 18mm thick laminated exterior MDF shadow gaps  
Colour: from Dunhams colour selector

SGL Core/Face: Solid grade laminate with colour finish to both sides giving 13mm nominal thickness  
Edge: Polished and radiused

Shadow Strips: 17mm thick laminated birch plywood board shadow gaps  
Colour: from Dunhams colour selector

### Dimensions:

Height: Full room height/ Cubicle Height/ Low level removable access panels  
Floor Clearance: Panels commence at 100mm above finished floor level to allow for skirting detail by others.

### Fixings:

Panel Fixing: Concealed Keku clips(lift-off or pull-out pattern)

### Frames:

Access Panels pre-fitted to factory constructed birch ply subframes

### Options:

Panels: Hinged panels available as an alternative to lift-off/ pull-out at an additional cost.

Cut-outs: Available as an additional cost.

Find out more at [dunhamswashrooms.com](http://dunhamswashrooms.com) or call 01603 424855


Low Level:



Cubicle Height:



Full Room Height:

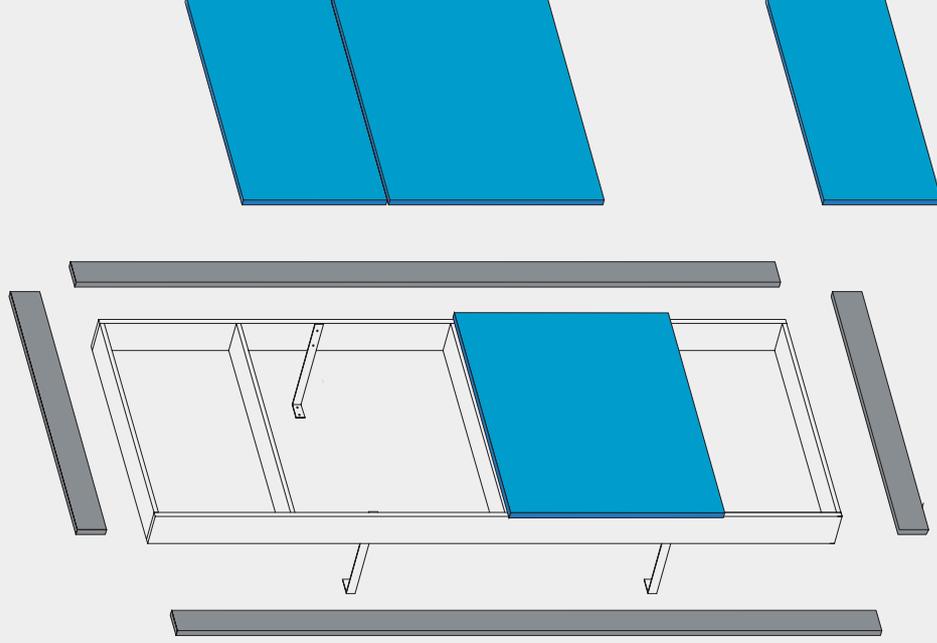

Pull-out Clips:



Lift-off Clips:

