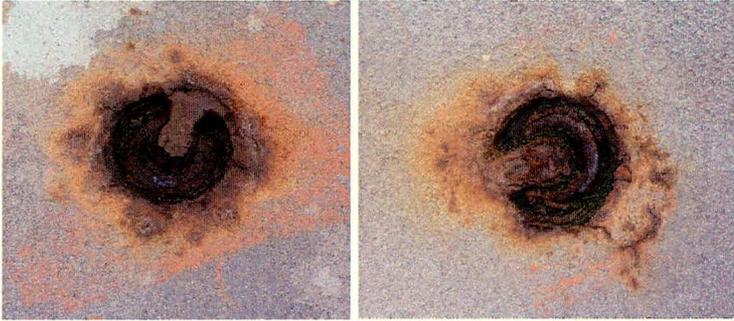
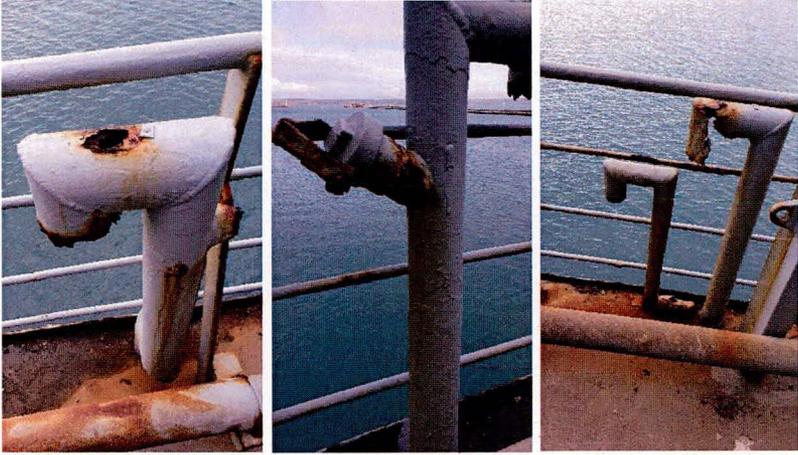


TASK NO.	TASK/DESCRIPTION	NOTES
	H2 HULL AND STRUCTURE – EXTERNAL DECKS AND ASSOCIATED FITTINGS	
H2.02	<p><b>Redundant vehicle deck tie-down points.</b></p>  <p>Clear out heavily corroded redundant vehicle deck tie down points and resin fill. REPRESENT area on completion. ALLOW for 50 tie down points and 20m<sup>2</sup> REPRESENTATION.</p>	<p>IAW Paint scheme - General 12 and Annex B refer.</p>

TASK NO.	TASK/DESCRIPTION	NOTES
	H2 HULL AND STRUCTURE – EXTERNAL DECKS AND ASSOCIATED FITTINGS	
H2.03	<p><b>Tank Vent Goose Necks</b></p>  <p>Numerous tank vent Goose Necks are have suffered excessive corrosion such that full thickness penetration is evident and some have come detached from deck. Manufacture and RENEW goosenecks affected. Goose necks are welded to deck. REPRESENT goosenecks and deck area on completion.</p> <p>ALLOW for 10 goose necks. ALLOW for 15m<sup>2</sup> REPRESENTATION.</p>	<p>Hotwork Required – Appropriate precautions to be taken iaw General 8.4.</p> <p>IAW Paint scheme -General 12 and Annex B refer.</p>

TASK NO.	TASK/DESCRIPTION	NOTES
H2.04	<p data-bbox="411 421 683 454"><b>Deck Drain Opening</b></p>  <p data-bbox="408 880 1214 994">Forecastle deck drain port side has grill missing allowing ingress of debris and is heavily corroded. Prove drain clear and unblock as necessary. RENEW grill studs, REPRESENT deck drain opening and surrounding deck area. Supply and fit new deck drain grill.</p> <p data-bbox="408 1028 836 1059">ALLOW for 1m<sup>2</sup> REPRESENTATION.</p>	<p data-bbox="1249 421 1452 591">Hotwork Required – Appropriate precautions to be taken iaw General 8.4.</p> <p data-bbox="1249 620 1452 734">IAW Paint scheme -General 12 and Annex B refer.</p>

TASK NO.	TASK/DESCRIPTION	NOTES
H2.05	<p data-bbox="432 322 1145 376">H2 HULL AND STRUCTURE – EXTERNAL DECKS AND ASSOCIATED FITTINGS</p> <p data-bbox="397 414 730 448"><b>Forecastle Deck Fittings</b></p>  <p data-bbox="397 927 1214 1070">Numerous unused Forecastle deck fittings are excessively corroded and beyond preservation. Fittings to be removed and deck area <b>RESERVED</b> on completion. Fittings to be identified to contractor by Authority's Authorised Representative. Contractor to dispose of redundant fittings.</p> <p data-bbox="397 1081 1214 1115">ALLOW for 10 in number fittings. ALLOW for 5m<sup>2</sup> <b>RESERVATION</b>.</p>	<p data-bbox="1248 414 1455 584">Hotwork Required – Appropriate precautions to be taken iaw General 8.4.</p> <p data-bbox="1248 611 1455 723">IAW Paint scheme -General 12 and Annex B refer.</p>