

# EUROGLAZE ROOFLIGHT

## Typical Glazing Specification:

Outer - 3mm thick clear UV protected polycarbonate

Mid - 2mm thick clear polycarbonate

Inner - 2mm thick clear or diffused polycarbonate (T.B.C.)

## X2 ROOFLIGHT SPECIFICATION

(FABRICATED FROM SELF FINISH WHITE EXTRUDED uPVC)


Quantity of Rooflight(s)	1no
Roof Opening - Length (mm)	Dim A
Roof Opening - Width (mm)	Dim B
Roof Insulation Depth (mm)	Dim C
Kerb Ventilation? (Hit and miss ventilation)	✓
Opening Frame?	✗

WHITE POLYESTER POWDER COATED ALUMINIUM SECURITY FRAME


uPVC WEATHER FLANGE; REMOVE, APPLY WEATHER PROOFING MEMBRANE TO KERB, AND RE-FIT WITH FIXINGS PROVIDED

ROOF FINISHES DRESSED UP EXTERNAL FACE OF X2 KERB BY ROOFING CONTRACTOR

X2 KERB SECURED USING SUITABLE FIXINGS @ 300mm CENTRES (FIXINGS BY INSTALLER)

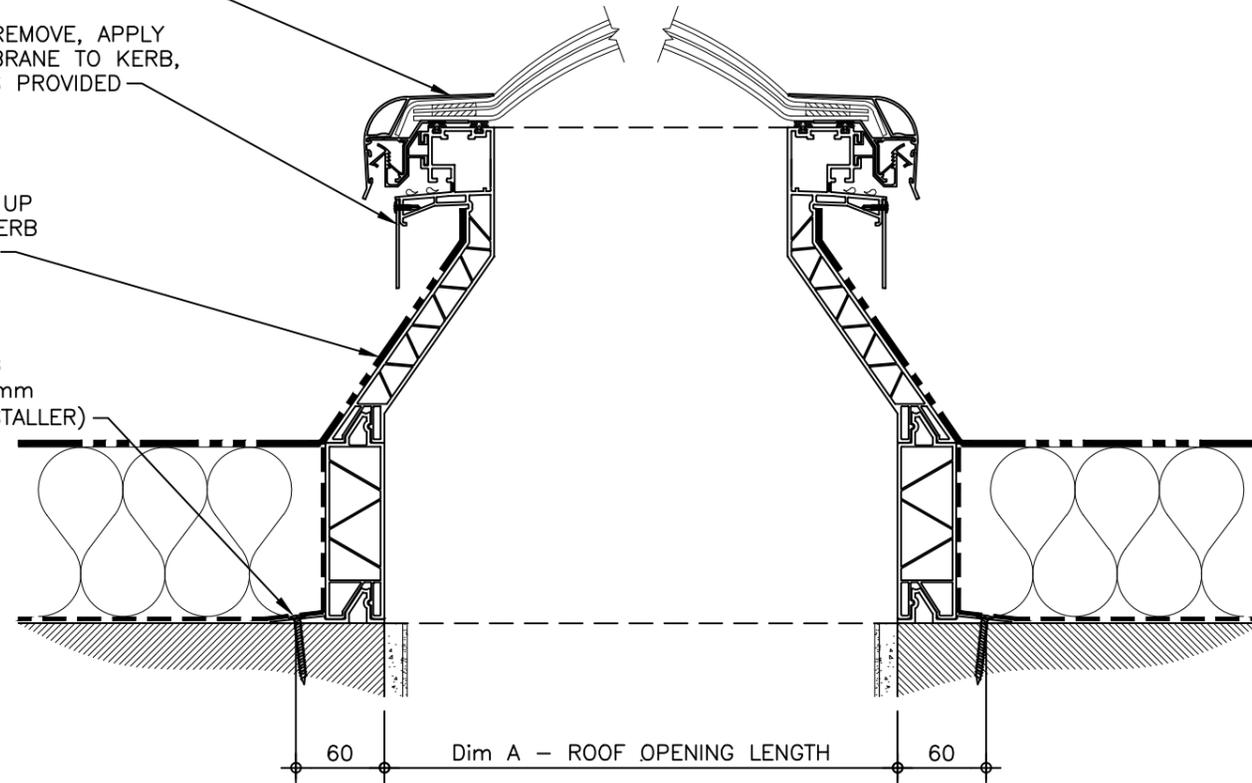

SECTION THROUGH LENGTH

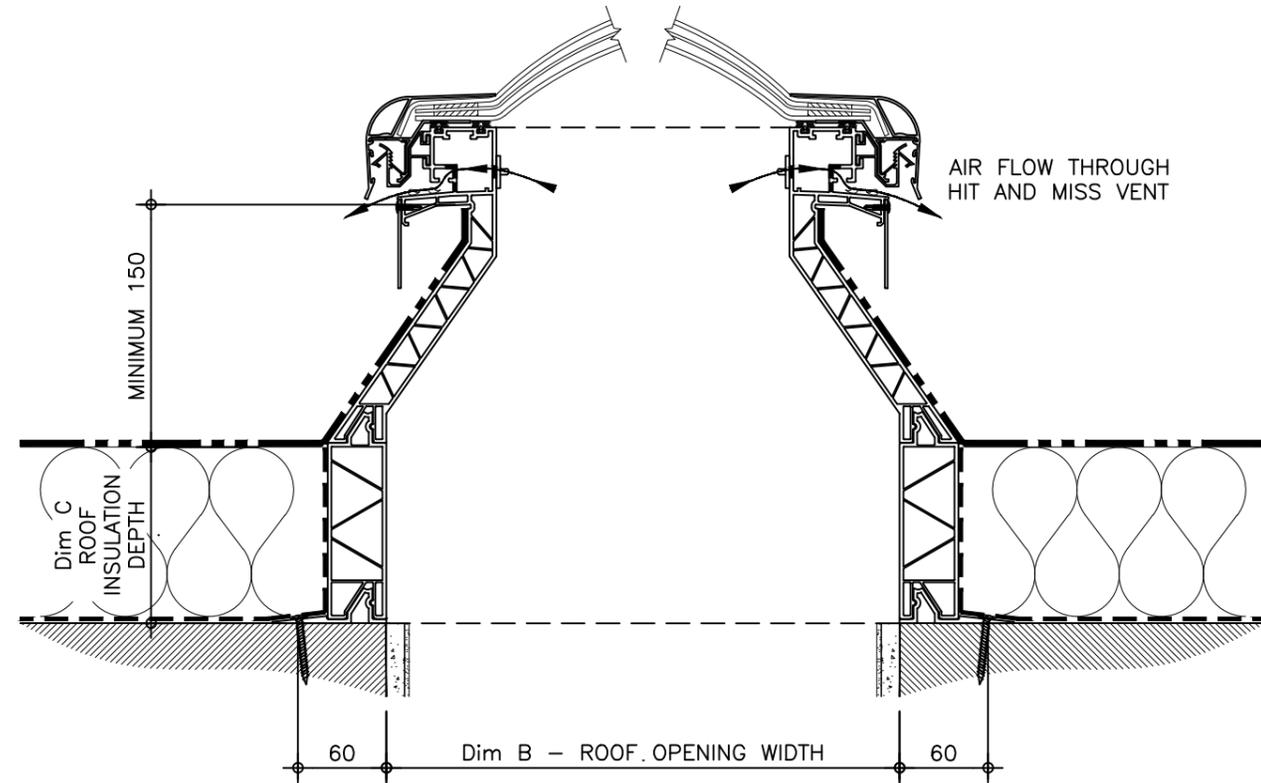

SECTION THROUGH WIDTH

REV:	DATE:	DESCRIPTION:	DRN BY	DESCRIPTION:
0	14.10.15	First issue of this drawing	IW	Euroglaze hit and miss ventilated uPVC upstand fixed direct to roof with 120mm uPVC extension piece (for flat roof insulation), with triple skin polycarbonate dome and aluminium security frame.
DRAWN BY:		CREATION DATE:	CHECKED BY:	SCALE(S)
IW		14.10.15	RT	1:5 @ A3
REVISION:		0		
Bauder Limited - UK Office				Bauder Limited - Ireland Office
70 Landseer Road, Ipswich, Suffolk, IP3 0DH, England T: +44(0)1473 257 671 F: +44(0)1473 230 761 E: Technical@bauder.co.uk www.bauder.co.uk				O'Duffy Centre, Cross Lane, Carrickmacross, Co. Monaghan, Ireland T: +353(0)42 9692 333 F: +353(0)42 9692 839 E: Technical@bauder.ie www.bauder.ie



DRG No.  
**BA-X2-A-01-SF**