Lutterworth Town Council Building

Proposed Access and Security Plan

143-TAA-00-ZZ-DR-A-2900

T03

<u>Key</u>



MANUAL KEY OPERATED LOCK

New Key operated Lock to face door leaf. Accessable for staff only.



SERVICE CUPBOARD DOOR

New Key operated Lock to face door leaf. Seperate Key Operated Lock for store room only. Accessable for staff only.



GLAZED VISION PANEL.

Glazed vision panel within door in accordance with BS 476. Allow for glazing to match door specification in regards to both integrity and insulation if fitted in fire rated doorsets Refer to NBS L20.



AUTOMATIC DOOR ENTRY SYSTEM:

Motorised door system to open on release button from reception desk.



AUTOMATIC DOOR CLOSER

Automatic self closing door device complying with BS EN 1154, BS EN 1634-1, BS 476-22.



THUMB TURN DOOR LOCK/RELEASE:

To Rooms as indicated.



EXISTING CCTV (LOCATION RETAINED):

Denotes area's where existing external CCTV location is to be retained and unaltered.

CCTV to remain operational before, during and after construction.



EXISTING CCTV (RELOCATED):

Denotes area's where existing external CCTV location has been relocated as shown.

CCTV to remain operational before, during and after construction.

Arrow denotes direction of CCTV coverage.



PROPOSED CCTV (AS SHOWN):

Denotes area's where new external CCTV location are

CCTV to match existing and to be wired to existing system. Arrow denotes direction of CCTV coverage.

Allowance to be made for ensuring the existing CCTV and fire alarm remain operation during construction.






: is drawing is to be read in conjunction with all other

wing is to be read in conjunction with all other consultants and specialist sub-contractors' throughout design, tender & consultantian all restoration and subs based on structural & MEP philosophy & is to be fully designed, detailed & dimensioned by others'


An appellation manifoldules are of regular a bight offer wheather state or 1-20 yequitable in production manufacturer must be approved in writing by the Contract Administrator. 2-30 yequitable in production use. All drawings are to be read in conjunction with project specific National Building Specification. The main contractor is responsible for checking all dimensions prior to commencement of work. Any discremencies discovered must be reported to the Contract Administrator as soon as they become.



All existing induction loops to reception area to be retained.

Guarding hoops with cane detection to be provided behind outward opening external doors.



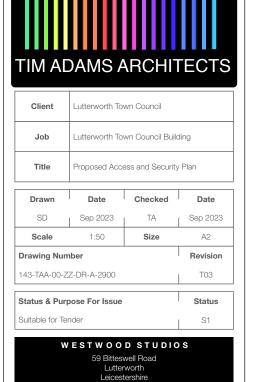

Tel: 01162 985350 w.timadamsarchitects.co.uk