




rev	date	amendment	dwn	chkd
A	07.06.19	Roof tiles updated to Bold Roll shape. Pirth bricks changed to regular. Rafter kickers changed to kicker fillets on top of rafters	cad	gt
B	20.07.19	60-min fire compartmentation added; stairs updated	CAD	GT

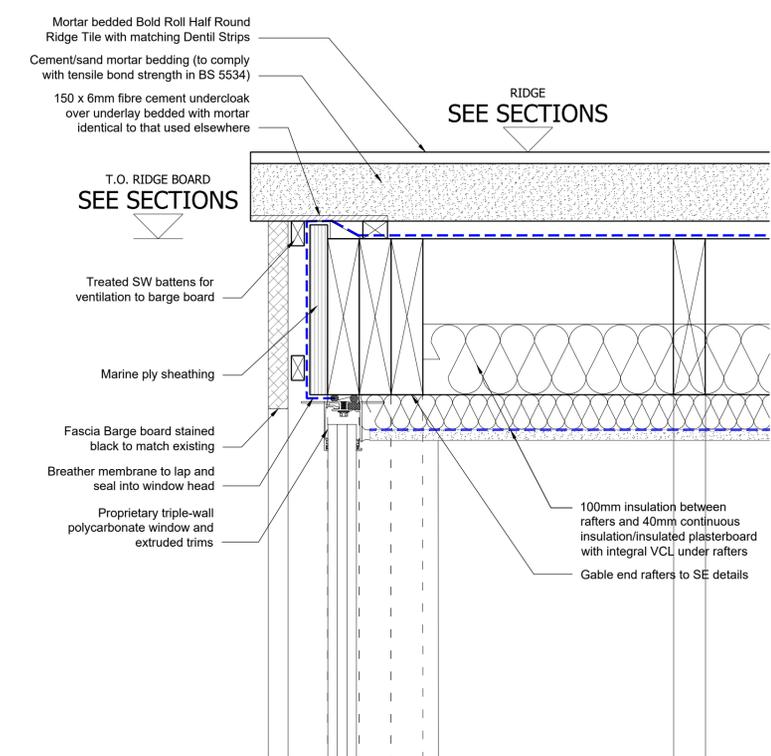


11 Gable end at window head

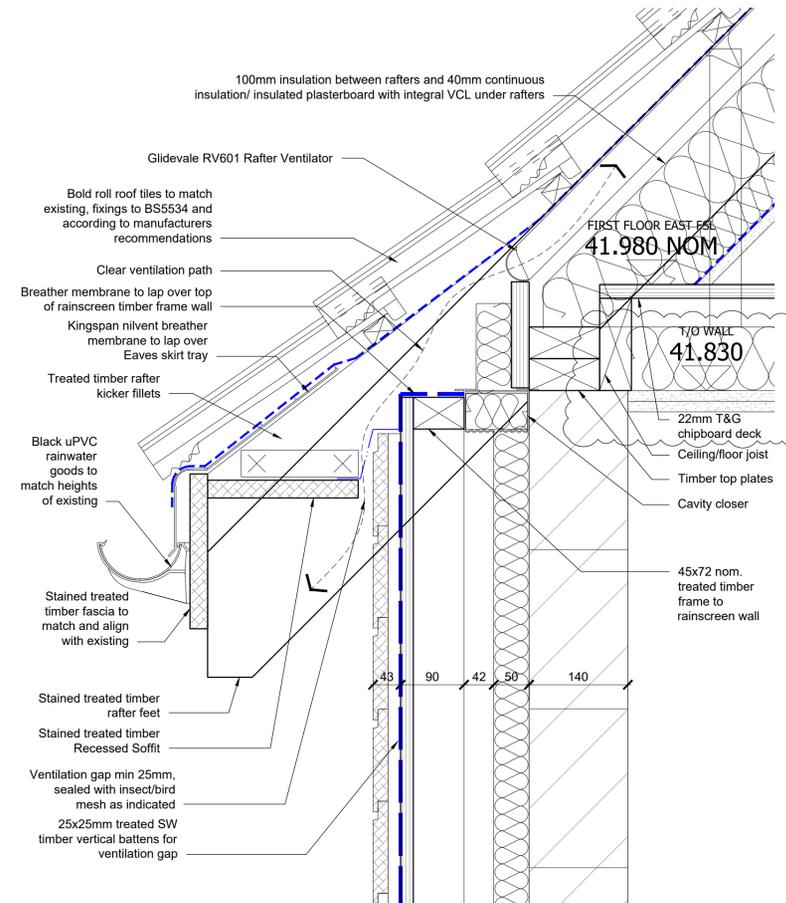


12 Eaves at timber clad storage extension

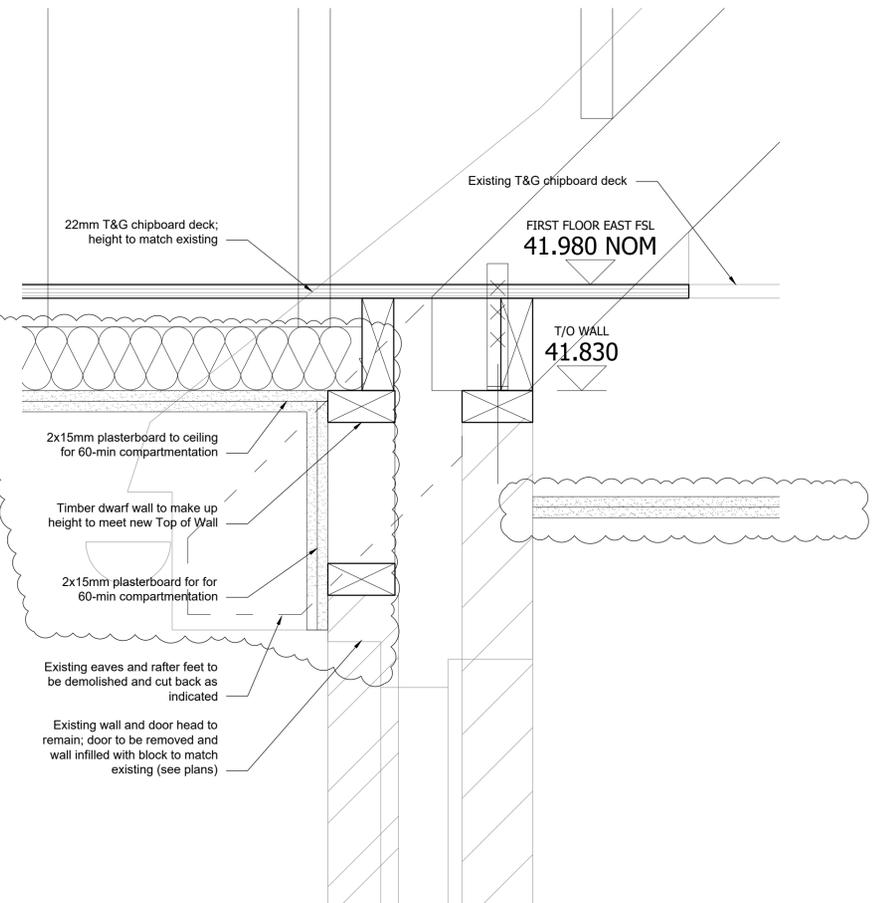


13 Ceiling and floor joint btwn. existing and new

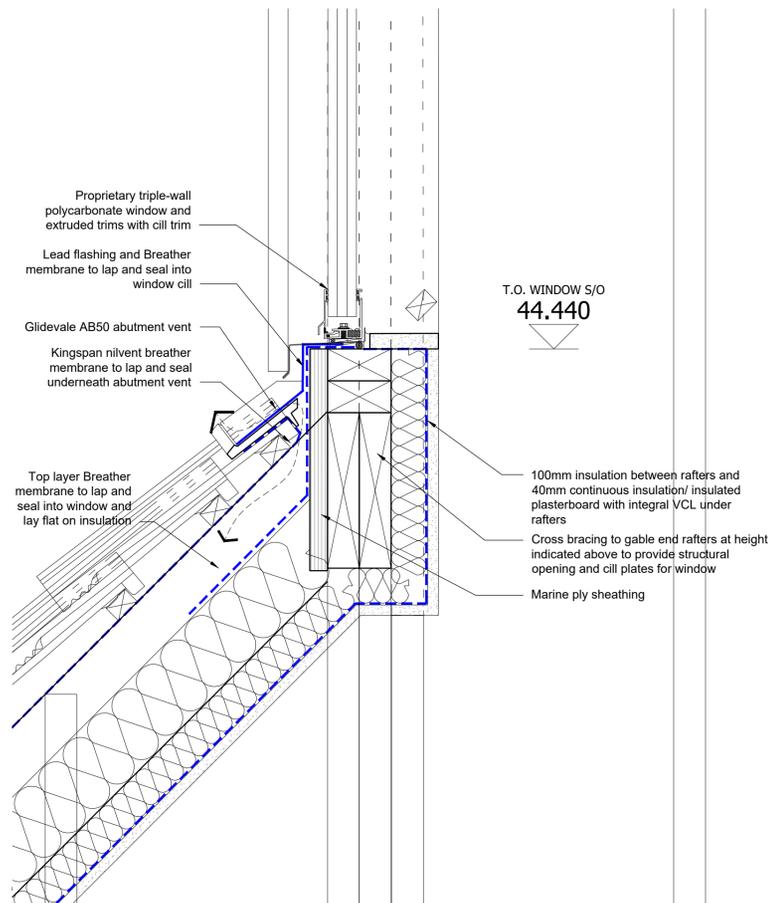

14 Gable verge at window cill

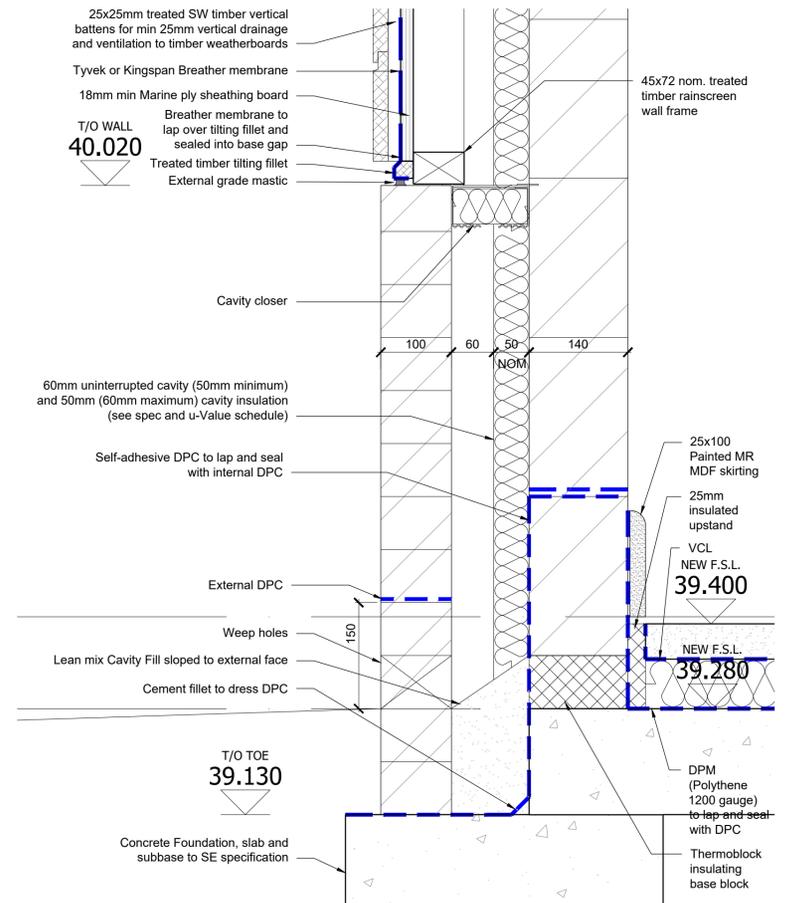

15 Wall base and foot at timber clad storage extension

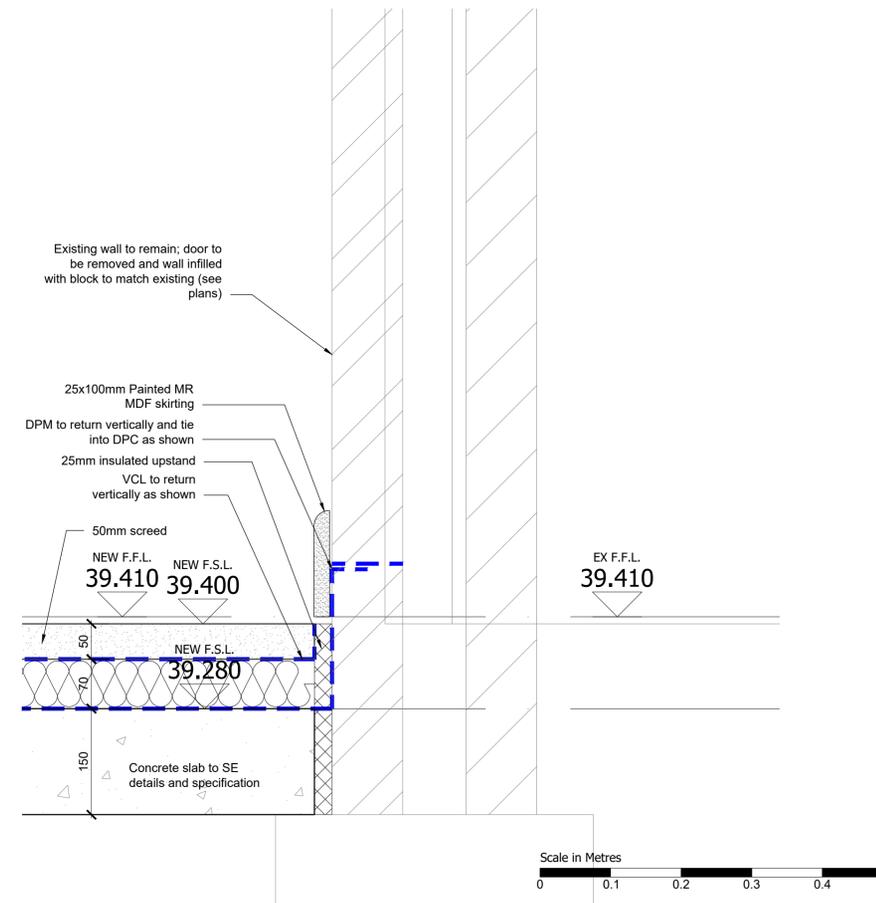

16 Floor connection at existing and new storage extension

- DETAIL NOTES, ROOF TILES:**
1. Tiles must be laid in a straight bond pattern
  2. Tiles must be hung on their ribs
  3. It is always advised that tiles are laid at mid shunt, although the precise roof details may require tiles to be laid more open or closed
  4. When laid at mid shunt, tiles will have +/- 1.5 mm of shunt to provide laying flexibility
  5. Eaves Comb must be used at all eaves situations
  6. Dentil slips must be used for mortar bedded ridges and hips
  7. Individual tiles can be nailed, clipped or nailed & clipped
  8. Always refer to FixMaster for a BS 5534-compliant fixing specification
  9. When clipping verges, both left-hand and right-hand perimeter tiles must be clipped

**CROWTHER ARCHITECTS ASSOCIATES**  
 CROWTHER ASSOCIATES ARCHITECTS LLP  
 PELHAM HOUSE  
 25 PELHAM SQUARE  
 BRIGHTON BN14ET  
 T: 01273 695535  
 www.crowtherassociates.co.uk

client  
 project  
 Wivelsfield Village Hall Extensions  
 drawing  
 GENERAL ARRANGEMENT BUILDING DETAILS, SHEET 1 DETAILS 11-16  
 date  
 Apr 2019  
 scale  
 1:50 @ A1  
 dwn  
 CAD  
 checked  
 GT  
 status

**TENDER**  
 job no  
 C-1732 (30)001  
 dwn no  
 T1  
 revision