



# ANDRIS LUX

ELECTRIC STORAGE WATER HEATER

HOT WATER | HEATING | RENEWABLES

[ariston.com/uk](http://ariston.com/uk)



# ANDRIS LUX FEATURES AND BENEFITS



The Andris Lux is a market-leading unvented electric water heater, offering superb hot water performance from a cutting-edge, compact, Italian design. Convenient and easy to install, the unit combines energy efficiency, durability, usability and safety. It is available in 8 models including 6, 10, 15 and 30 litre variants, as well as undersink and oversink versions.

UP TO **A** **XXS**



- / Easy to operate with mechanical dial
- / 'E' setting on the dial to optimise comfort and energy saving
- / Copper heating element (Nickel free)
- / Heating lamp to show the heating cycle is in process
- / Fast reheat times
- / Installation in 10 easy steps


## FEATURES:

- TITANIUM ENAMELLED TANK**  
/ With its proprietary titanium tank engineering, the Andris Lux boasts exceptional durability and an extended product life.
- EASY TEMPERATURE REGULATION**  
/ A regulation knob allows the temperature to be set according to a user's comfort. The 'E' setting optimises energy saving.
- ITALIAN DESIGN**  
/ Designed by Umberto Palermo, the Andris Lux's modern, elegant and cutting edge new design offers a sophisticated look and easy installation.
- ENHANCED ANTI-CORROSION**  
/ With its robust 4 bolt flange and copper heating element, the Andris Lux Eco offers improved protection against water corrosion.


- BATHROOMS
- KITCHENS
- ANNEXES
- SMALL BUSINESSES
- LOFT CONVERSIONS
- LOG CABINS
- UTILITY ROOMS
- GARAGES & WORKSHOPS
- CONSERVATORIES
- EXTENSIONS



# ANDRIS LUX ELECTRIC WATER HEATER

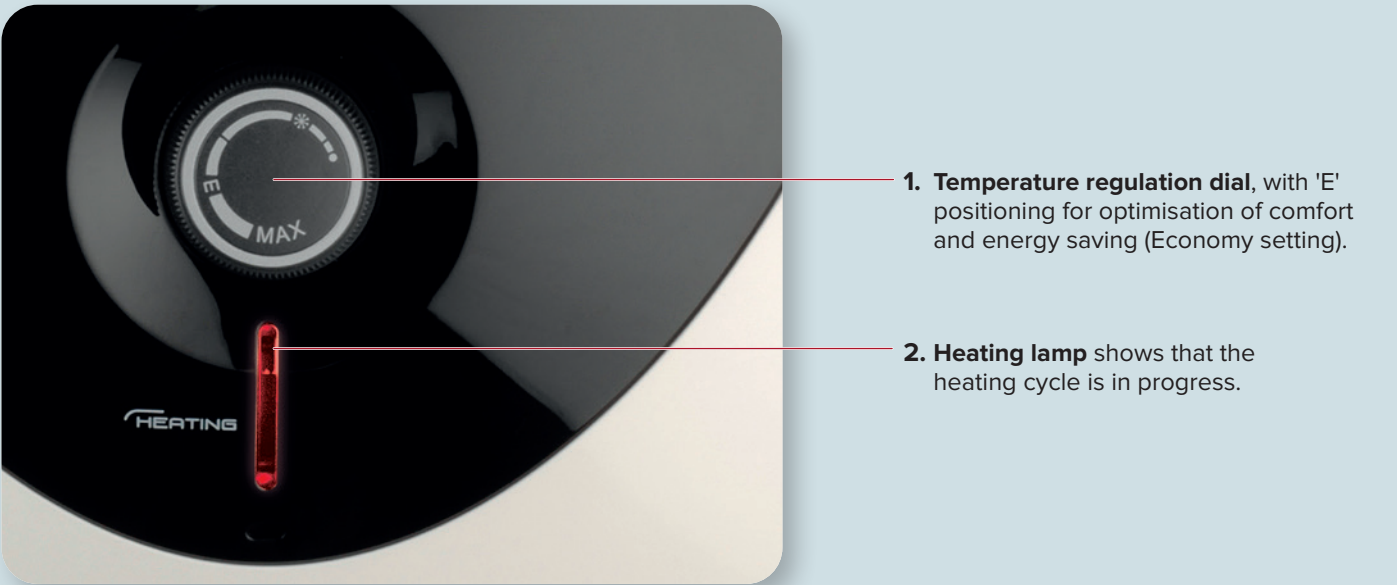

# PRODUCT DIMENSIONS

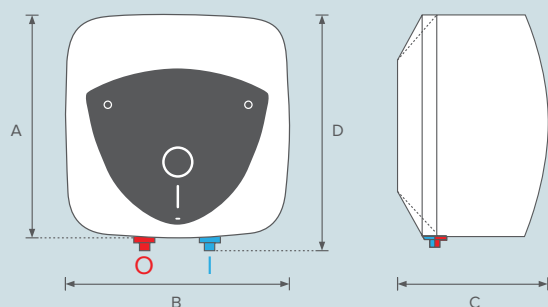

	6L (Undersink) 1.5kW	10L (Under & Oversink) 2kW & 3kW	15L (Under & Oversink) 2kW & 3kW	30L (Oversink) 3kW
A	315mm	360mm	360mm	447mm
B	315mm	360mm	360mm	447mm
C	250mm	298mm	346mm	410mm
D	330mm	385mm	385mm	476mm

## LEGEND

— Cold water inlet G 1/2"

○ Hot water outlet G 1/2"

## ANDRIS LUX

Description	6 U 1.5kW	10 O 3kW	10 U 2kW	10 U 3kW	15 O 3kW	15 U 2kW	15 U 3kW	30 O 3kW
Type	Unvented	Unvented	Unvented	Unvented	Unvented	Unvented	Unvented	Unvented
Capacity (Litres)	6	10	10	10	15	15	15	30
Installation	Undersink	Oversink	Undersink	Undersink	Oversink	Undersink	Undersink	Oversink
ErP Class	B	A	B	B	A	B	B	C
Element Rating (kW)	1.5	3	2	3	3	2	3	3
Tapping Profile	XXS	XXS	XXS	XXS	XXS	XXS	XXS	S
Heating Time (min)	15	12	17	12	18	26	18	30
Unit Weight (kg)	5.1	6.7	6.7	6.7	7.5	7.5	7.5	11.2
Standing Loss (kWh/24h)	0.42	0.46	0.71	0.71	0.61	0.85	0.85	0.75
PRODUCT CODES	3626292	3100302	3100306	3100303	3100308	3100310	3100309	3820017
								Including kits A, B & C

## INSTALLATION KITS:

IN ORDER TO FIT AN ARISTON ANDRIS LUX, IT IS GOOD PRACTICE AND SOMETIMES MANDATORY TO INSTALL ONE OR SEVERAL OF THE FOLLOWING KITS:



### KIT A

Expansion Vessel & Non-return Valve

The expansion vessel prevents any build-up of pressure within the domestic hot water system, while the non-return valve stops any backflow of hot water into the cold water main.

PRODUCT CODE: 406801



### KIT B

3.5 Bar Pressure Reducing Valve

The maximum cold water inlet pressure designed for the Andris unit is 3.5 bar. Therefore, this pressure reducing valve controls the water to not exceed this limit.

PRODUCT CODE: 406802



### KIT C

Discharge Tundish

In the event the hot water system over pressurises, water is discharged via the 6 bar pressure relief valve and the tundish visually indicates a discharge is occurring.

PRODUCT CODE: 406807

## HOT WATER | HEATING | RENEWABLES

Customer Service: [customer.service.uk@aristonthermo.com](mailto:customer.service.uk@aristonthermo.com) | 0333 240 8777

Sales: [salesoffice@aristonthermo.com](mailto:salesoffice@aristonthermo.com) | 0333 240 6666

[ariston.com/uk](http://ariston.com/uk)

[@AristonUK](https://twitter.com/AristonUK) [/AristonUK](https://facebook.com/AristonUK) [/AristonThermo](https://youtube.com/AristonThermo) [/AristonUK](https://instagram.com/AristonUK)

