

New Doorsets:
 FD305 half hour fire rated solid core veneer doorsets fitted with smoke seals and all homogeneity noted below. Doors and Frames adapted to suit existing structural openings. All doors to be certified with test certification provided prior to installation.

Vision Panels:
 New 15mm Pyrogard 30min fire rated glass (O.E.A) within FD30 half hour fire rated hockey stick hardwood beading and returnless seals. Glazing area not to exceed 0.5m² per unit as per Approved Document N4 regulations and should provide minimum zone of visibility as detailed on drawings.

Homogeneity / Furniture:

Door Hinges:
 Product Details: Ball bearing door hinges
 Manufacturer: Contractors Choice
 Fire Rating: 30 minute
 Standard: BS EN 1935 grade 13 standard, CE certified
 Finish: stainless steel
 Fittings: Manufacturer supplied

Overhead door closers:
 Product Details: Overhead door closer
 Manufacturer: Contractors Choice
 Fire Rating: 30 minute
 Standard: BS EN 1154 standard, CE marked.
 Finish: Stainless Steel.
 Fittings: Manufacturer supplied

Door Stops:
 Product Name: Heavy Duty Floor Mounted Door Stop (O.E.A)
 Manufacturer: SPS London
 Product Reference: 99994
 Dimensions: 51 x 60 x 40mm
 Standard: BS EN 16334-1
 Finish: Stainless Steel
 Fittings: Manufacturer supplied

Finger Guards:
 Product Details: Finger Guards
 Manufacturer: Contractors Choice
 Fire Rating: N/A
 Size: Full length
 Material: PVC
 Finish: White
 Fittings: Manufacturer supplied

Door Locks:
 Product Name: Euro Profile Sashlock
 Manufacturer: Smith and Locke (O.E.A)
 Fire rating: 30 minutes
 Finish: Nickel
 Fittings: Manufacturer supplied
 Accessories:







- Strike catch
 - 5 pin Thunburn Euro Cylinder lock (suited)
 - Zno. Touchpoint Escutcheons - Satin Chrome
 - Zno. Touchpoint Bellia Door Handles - Satin Chrome

Signage:
 Product Name: Fire Door Keep Shut
 Manufacturer: Screfix
 Product Ref: 42461
 Dimensions: 76mm Dia
 Finish: Satin Stainless Steel
 Fittings: Manufacturer supplied

Door Frames:
 BWR or FSC certified and tested to BS 476 Part 22

35 x 100mm thick half hour fire rated softwood timber frames to provide minimum density of 450kg/m³. Door frame to be fitted with 14.5 x 32mm door stop planed (fixed with glue or pinning) and should include for all new 15 x 4mm uninterrupted smoke seals fitted within rebate of door frame to provide cold smoke protection.

Architraves:
 Softwood pencil round architraves, 18 x 49mm nail fixed to new timber frames. Nails to be painted below surface of timber and filled with wax or builders caulk prior to decoration. Architraves finished with Dulux trade gloss finish as per decoration specification.

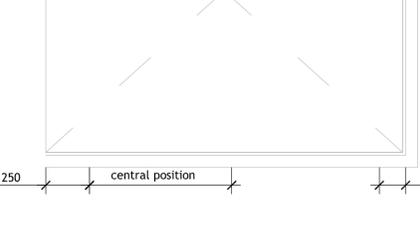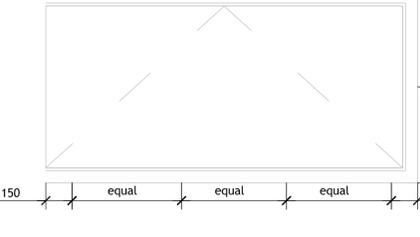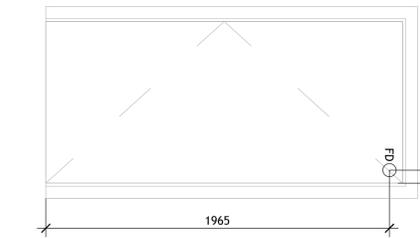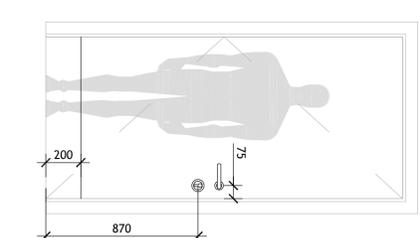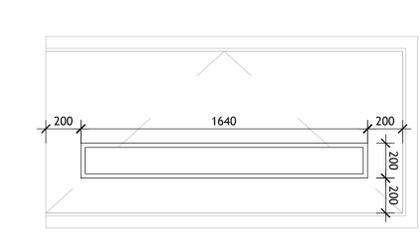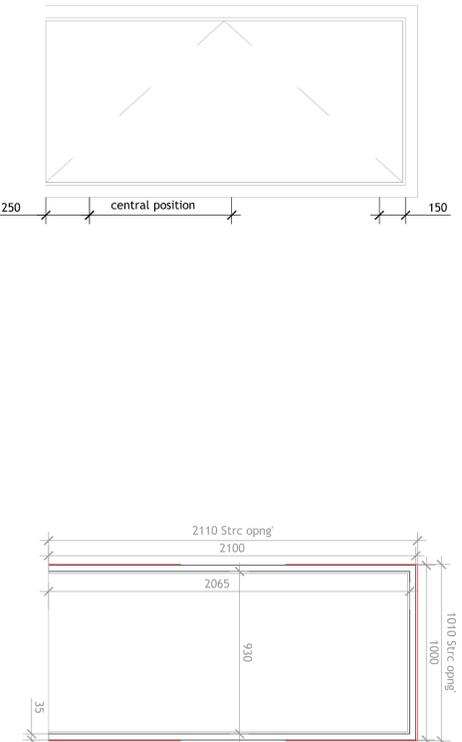





Door Style 1
Single Leaf
Classroom and Office
Vision Panel setting out

Door Style 1
Single Leaf
Classroom and Office
Handles and Locks setting out

Door Style 1
Single Leaf
Classroom and Office
Signage setting out

Door Style 1
Single Leaf
Classroom and Office
Frame Fixing

Door Style 1
Single Leaf
Classroom and Office
Hinge Fixing

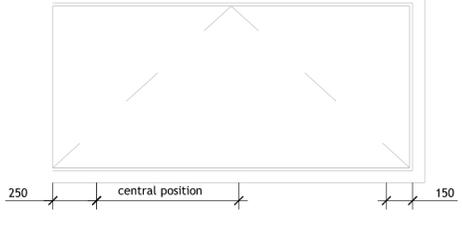
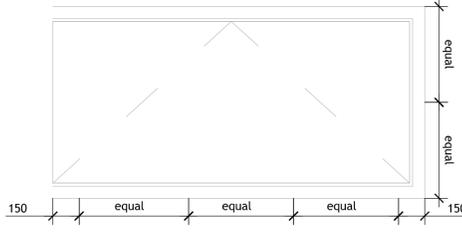
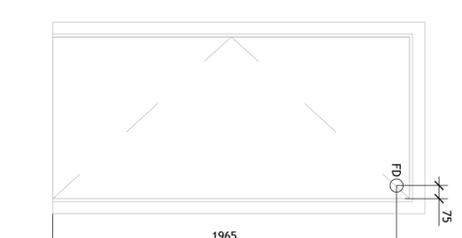
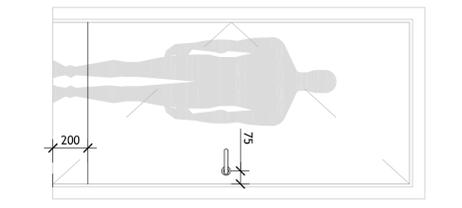


Door Style 2
Single Leaf
W.C Rooms
Handles and Locks setting out

Door Style 2
Single Leaf
W.C Rooms
Signage setting out

Door Style 2
Single Leaf
W.C Rooms
Frame Fixing

Door Style 2
Single Leaf
W.C Rooms
Hinge Fixing



Jamb
 Meeting Style
 Fire rated vision panel
 Architrave

REV	DESCRIPTION	DATE	DRAWN	CHECKED

David Yeadon Ltd
 Unit: 1512/D Springfield Commercial Centre, Bagley Lane, Farsley, Leeds LS28 5LY
 Tel: 0113 296 1886 Fax: 0113 296 3715 Email: enquiries@davidyeadon.com

CLIENT
 Bruncliffe Academy
ADDRESS
 Bruncliffe Lane, Morley, Leeds, LS27 0LZ

PROJECT
 Temporary Accommodation at Bruncliffe
DRAWING NO.
 Door Schedule

SCALE
 1:100@A1
DRAWING NO.
 DV/1431-2-02

DRAWN
 CAB
DATE
 May 2017