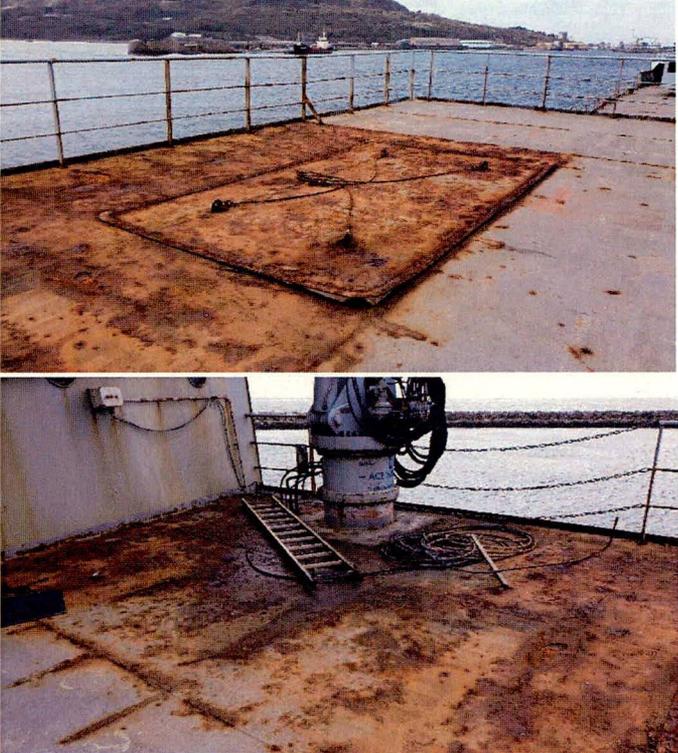
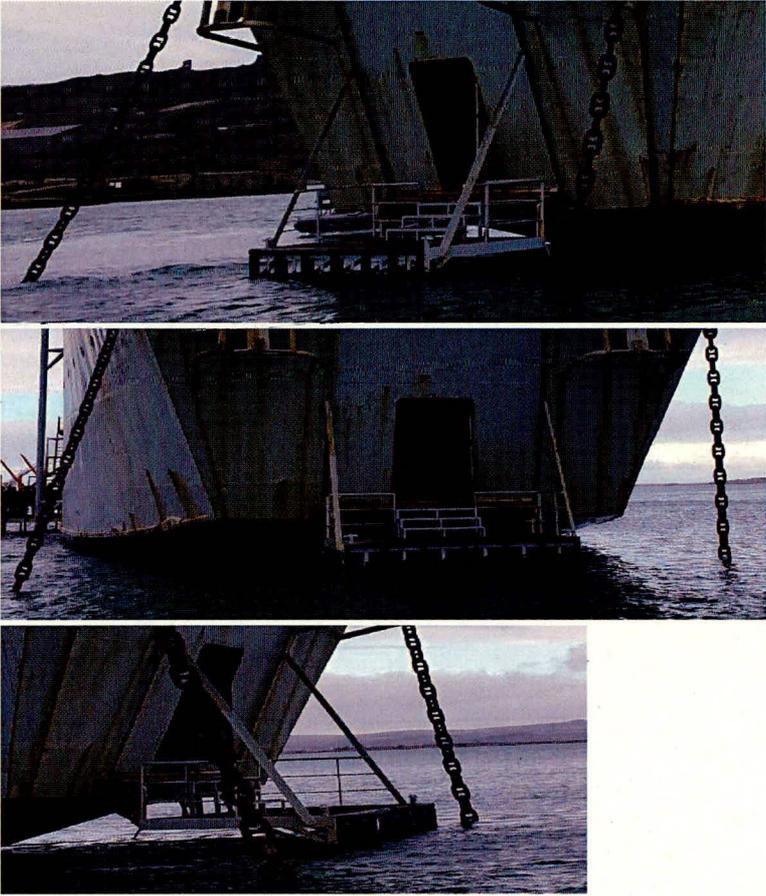


TASK NO.	TASK/DESCRIPTION	NOTES
H2.18	<p data-bbox="459 331 1163 383">H2 HULL AND STRUCTURE – EXTERNAL DECKS AND ASSOCIATED FITTINGS</p> <p data-bbox="408 416 772 450">Crane Deck and Soft Patch</p>  <p data-bbox="408 1223 1251 1361">The Crane Deck and associated removable soft patch have large areas of total paint coating breakdown and consequently are showing signs of active corrosion. Soft patch eyeplates to be removed and soft patch welded in place. On completion of crane removal (M1.01) deck and soft patch to be REPRESENTED.</p> <p data-bbox="408 1375 852 1408">ALLOW for 25m² REPRESENTATION.</p>	<p data-bbox="1251 421 1449 591">Hotwork Required – Appropriate precautions to be taken iaw General 8.4.</p> <p data-bbox="1251 618 1449 730">IAW Paint scheme -General 12 and Annex B refer.</p> <p data-bbox="1251 763 1410 842">To be carried out post M1.01</p>

TASK NO.	TASK/DESCRIPTION	NOTES
	H2 HULL AND STRUCTURE – EXTERNAL DECKS AND ASSOCIATED FITTINGS	
H2.19	<p>Redundant Upperdeck Items</p>  <p>Numerous upperdeck fixtures and fittings are now redundant, and showing signs of paint coating breakdown and excessive corrosion. These items are to be removed and disposed of by the Contractor, and deck /bulkhead areas affected REPRESENTED on completion. Items to be removed will be identified on board by Authority's Authorised Representative.</p> <p>ALLOW for 80 man hours. ALLOW for 50m² REPRESENTATION.</p>	<p>Hotwork Required – Appropriate precautions to be taken iaw General 8.4.</p> <p>IAW Paint scheme -General 12 and Annex B refer.</p>

TASK NO.	TASK/DESCRIPTION	NOTES
H2.20	<p data-bbox="408 450 727 483">Stern Landing Platform</p>  <p data-bbox="408 1451 1249 1592">The stern landing platform has proved to be too short to allow access for the boats offloading personnel and equipment and requires extending. New design to be agreed with Authority's Authorised Representative. RESERVE platform on completion. Platform will be removed prior to berthing for period of Refit, work to be conducted in shoreside facility.</p> <p data-bbox="408 1648 1174 1677">ALLOW for 20m² RESERVATION. ALLOW for 8m² extension</p>	<p data-bbox="1249 450 1449 618">Hotwork Required – Appropriate precautions to be taken iaw General 8.4.</p> <p data-bbox="1249 651 1449 763">IAW Paint scheme -General 12 and Annex B refer.</p> <p data-bbox="1249 797 1449 875">To be completed in conjunction with H1.02.</p>