



Inscribed top panel to monument with corner post loosely assembled for illustration purposes (Panel A)



Inscribed top panel to monument with corner post loosely assembled for illustration purposes (Panel B)



Missing corner post caps to be replaced with matching tops following repair of top bar with new sections welded in to replace corroded sections at all four corners. Repair gate with matching sections and re-hang with new latch.

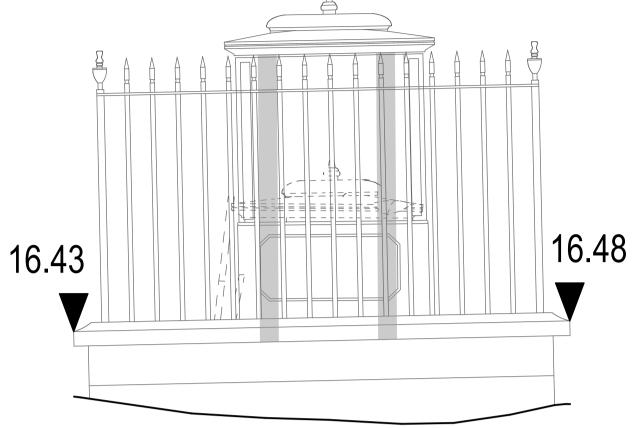

Carefully disassemble tomb components and salvage marble top section panels and limestone corner posts. Build up honeycomb brickwork core walls off existing base within tomb to support lid 10mm above top of side and end panels. 50mm space between face of brickwork and back of panels. Repair broken south and east panels. Back fragmented marble top section panels onto 25mm thick slate slabs. Re-assemble side and top panels of both stages, cramp to each other and brickwork core with stainless steel cramps, and repoint joints. Refix top cover and decorative capping.

Following removal of tree and roots, remove granite kerbs. Reset and re-bed granite kerbs to existing plinth as closely as possible to original line and level. Repoint joints between kerb stones. Ironwork

Chain drill to remove railings from lead caulked sockets and remove to workshop. Disassemble and salvage reusable elements. Obtain replacement matching elements and reassemble railings including gate. Thoroughly de-rust ironwork and decorate. Fix back in place with molten lead caulk

Clean stonework (volunteers)

C78 Glasson Family Monument

Carefully disassemble tomb components and salvage

marble top section panels and

limestone corner posts. Build up honeycomb brickwork core

walls off existing base within tomb to support lid 10mm

above top of side and end panels. 50mm space between


cramp to each other and

brickwork core with stainless

steel cramps, and repoint joints. Refix top cover and decorative

capping. Kerbs

face of brickwork and back of panels. Repair broken south and east panels. Back fragmented marble top section panels onto 25mm thick slate slabs. Re-assemble side and top panels of both stages,

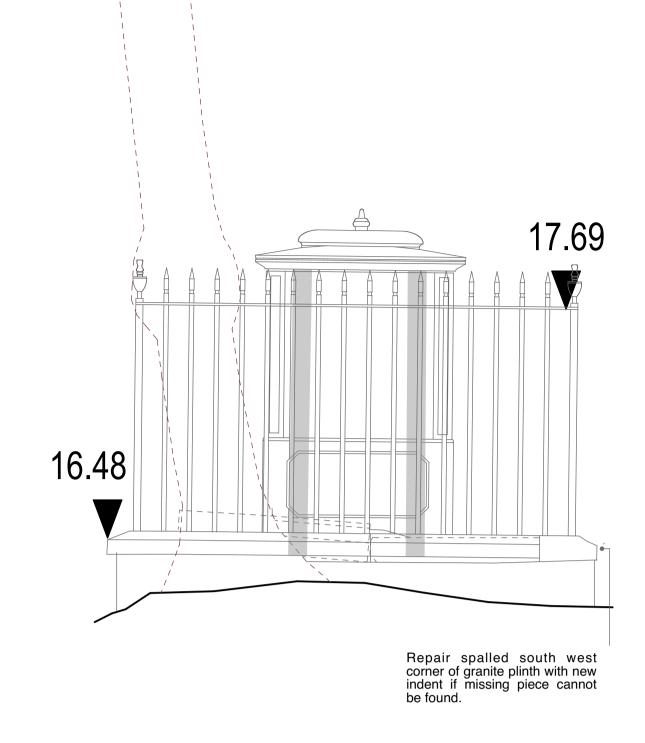



Plain top panel to monument with corner post still attached (along bottom edge as shown)



Fragment of corner post placed on bottom panels for illustration purposes

NORTH ELEVATION

WEST ELEVATION


**EAST ELEVATION** 



Spalled section of granite plinth, south west



Tree grown around top cap of railings, north

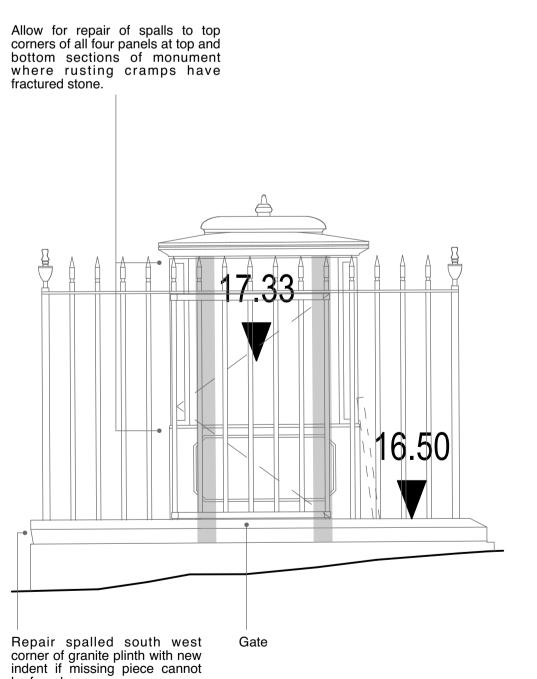


be found.

SOUTH ELEVATION

Following removal of tree and roots, remove granite kerbs. Reset and re-bed granite kerbs to existing plinth as closely as possible to original line and level. Repoint joints between kerb stones. Ironwork Chain drill to remove railings from lead caulked sockets and remove to workshop. Disassemble and salvage re-usable elements. Obtain replacement matching elements and reassemble railings including gate. Thoroughly derust ironwork and decorate. Fix back in place with molten lead

Clean stonework (volunteers)



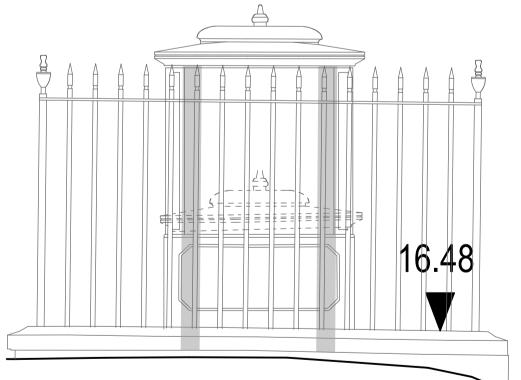



Detail of fragmented marble panels within and outside monument base



Detail of fractured south base panel of monument



Detail of fractured east base panel of monument

pdpGreen Consulting Ltd. Calenick House Truro Technology Park Heron Way, Newham Truro, Cornwall TR1 2XN

Tel: 01872 265400 Fax: 01872 276356

Email: reception@pdpgreen.co.uk

C78 Glasson Family Monument

Architecture, Structural and Civil Engineering

Job No: **J20-077** Dwg No: 3025 Rev: A

Certificate No FS 21557

This drawing is © pdp Green Consulting Ltd.

1. This drawing is to be read in conjunction with drawings, details

2. The Contractor is responsible for all dimensions and for the

3. All materials and workmanship to comply with current British

the drawing status box "FOR CONSTRUCTION".

and specifications issued for construction purposes as appropiate.

correct setting out of the work on site. Only figured dimensions

are to be used. Any discrepancies are to be reported before

4. This drawing is not to be used for construction unless marked in

5. The user of the designs and details represented by this document

respect of any construction activities for which this document

If the user of this document has any doubts as to their statutory

obligations in this regard, they should contact pdp Green. on

01872 265400 and ask for the Health and Safety Advisor.

are recommended to ensure that they are fully conversant with

the Construction (Design and Management) Regulations 2015 in

Notes.

proceeding.

may be used.

Standards and Codes of Practice.

15.02.21 Issue for Tender 05.02.21 Rev: Care: Amendments:

**TENDER** 

Project Leader: RG KJ RG

Proposed Monument Elevations C78

Falmouth Town Council

Heritage Restoration of Falmouth's **Ponsharden Cemeteries** 

Ponsharden

Date: 05.02.2021 Scale: 1:20 @A1 size

Chartered Practice