

Ceiling Suspended Indoor Unit

PCFY-P-VKM-E



Designed for ultra-quiet operation and easy maintenance, the unit provides comfortable air conditioning for a wide range of applications where floor or wall space cannot be used practically.


Key Features

- Indoor unit designed for direct ceiling suspension
- Flush to wall installation for concealment of service connections
- Drain piping can be connected from left or right




INDOOR UNITS		PCFY-P40VKM-E	PCFY-P63VKM-E	PCFY-P100VKM-E	PCFY-P125VKM-E
CAPACITY (kW)	Heating (nominal)	5.0	8.0	12.5	16.0
	Cooling (nominal)	4.5	7.1	11.2	14.0
	UK Heating	5.0	8.0	12.5	16.0
	UK Total Cooling - Hi (Sensible)	4.10 (3.00)	6.40 (4.60)	10.10 (7.10)	12.60 (8.90)
	UK Total Cooling - M2	4.03	6.22	9.94	12.17
POWER INPUT (kW)	UK Total Cooling - M1	3.92	6.09	9.70	11.66
	UK Total Cooling - Lo	3.79	5.93	9.23	11.00
	Heating (nominal)	0.04	0.05	0.09	0.11
	Cooling (nominal)	0.04	0.05	0.09	0.11
	Lo-M1-M2-Hi	167-182-200-217	233-250-267-300	350-400-433-467	350-400-450-517
AIRFLOW l/s	Lo-M1-M2-Hi	29-32-34-36	31-33-35-37	36-38-41-43	36-39-42-44
SOUND PRESSURE LEVEL (dBA)	Lo-M1-M2-Hi	24	32	36	38
WEIGHT (kg)		24	32	36	38
DIMENSIONS (mm)	Width	960	1280	1600	1600
	Depth	680	680	680	680
	Height	230	230	230	230
ELECTRICAL SUPPLY		220-240v, 50Hz	220-240v, 50Hz	220-240v, 50Hz	220-240v, 50Hz
PHASE		Single	Single	Single	Single
RUNNING CURRENT (A) Heating / Cooling		0.28 / 0.28	0.33 / 0.33	0.65 / 0.65	0.76 / 0.76
FUSE RATING (BS88) - HRC (A)		6	6	6	6
MAINS CABLE No. Cores		3	3	3	3

Front View

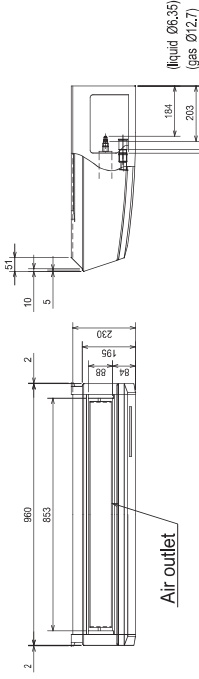


Side View




Air outlet

Air intake


Lower View

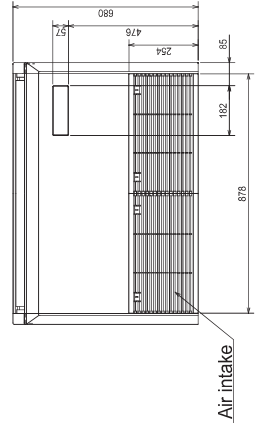

Front View

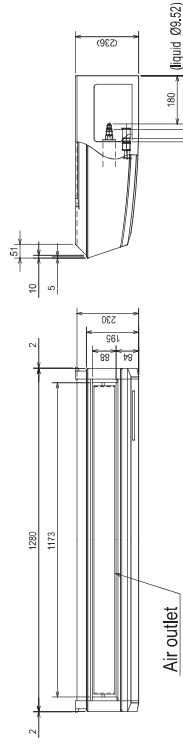


Side View




Air outlet

Air intake


Lower View

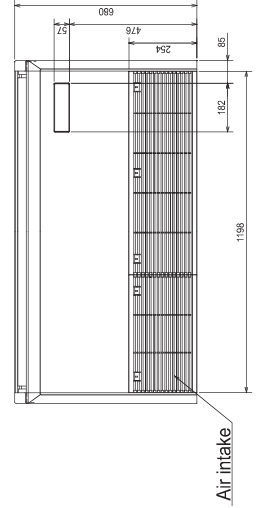

Front View

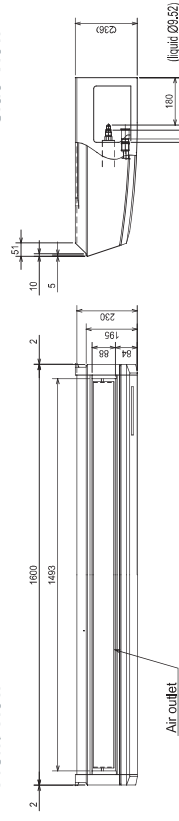

Side View



Air outlet

Air intake

Lower View

