
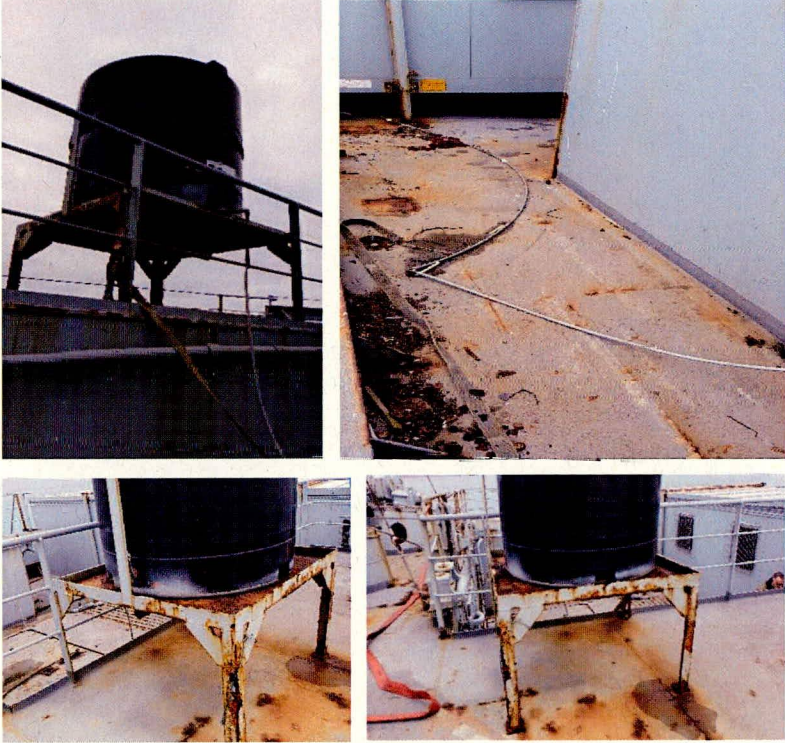






TASK NO.	TASK/DESCRIPTION	NOTES
	M1 MECHANICAL	
M1.01	<p><b>Hydraulically Operated Crane Port Side Vehicle Deck</b></p>  <p>This crane was originally fitted for RIB lifting operations for which there is no longer a requirement. The winch and its associated powerpack and pipework is to be removed. The contractor is responsible for disposal. Any deck or bulkhead penetrations resulting from the removal are to be sealed with welded blanks to maintain watertight integrity.</p>	<p>Hot work Required – Appropriate precautions to be taken in accordance with General 8.4.</p> <p>To be completed in conjunction with H2.19.</p>



TASK NO.	TASK/DESCRIPTION	NOTES
	M1 MECHANICAL	
M1.02	<p data-bbox="400 421 1109 454"><b>Sanitary Supply Tank, Support Frame and Pipework</b></p> <div data-bbox="400 470 1189 1209">  </div> <p data-bbox="400 1227 1214 1395">RENEW the gravity feed sanitary header tank along with its support frame (1.35m x 1.35m x 0.85m). Replacement tank capacity 1300litres +/- 100 litres. Contractor to remove and dispose of existing fit. The supply pipework also requires renewing and run to the new toilet block module (15mm pipework, approx. 10m). Steel support frame and deck area to be REPRESENTED on completion.</p> <p data-bbox="400 1411 845 1440">ALLOW for 10m<sup>2</sup> REPRESENTATION.</p>	<p data-bbox="1249 427 1452 595">Hot work Required – Appropriate precautions to be taken iaw General 8.4.</p> <p data-bbox="1249 622 1452 734">IAW Paint scheme -General 12 and Annex B refer.</p> <p data-bbox="1249 763 1452 846">To be completed in conjunction with H9.02.</p>

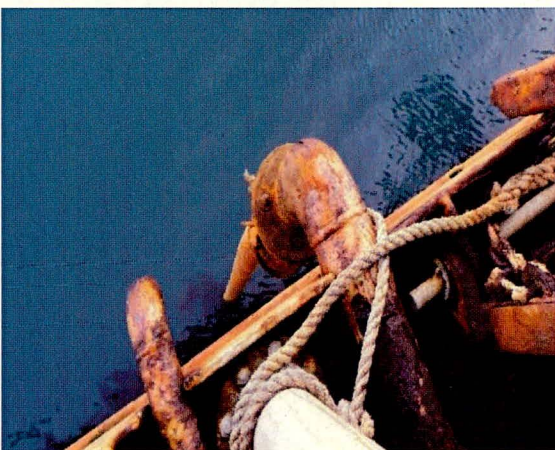

TASK NO.	TASK/DESCRIPTION	NOTES
	M1 MECHANICAL	
M1.03	<p><b>HPSW Pump</b></p>     <p>The diesel driven HPSW Pump is no longer required and is to be removed, along with the pipework leading to the HPSW ringmain, where it is to be blanked, and the suction pipework and associated fittings from waterline to pump. The contractor is responsible for disposal.</p>	