


Window board (internal cill): 18mm thick moisture resistant MDF. 20mm projection from face of wall, bullnose to leading edge, rounded corners. Decorated as per architraves - see specification.

Window reveal and head plastered to conceal fixings; decorated as per rest of wall.

PPC Aluminium window - see specification and window schedule. Contractor's choice of supplier.

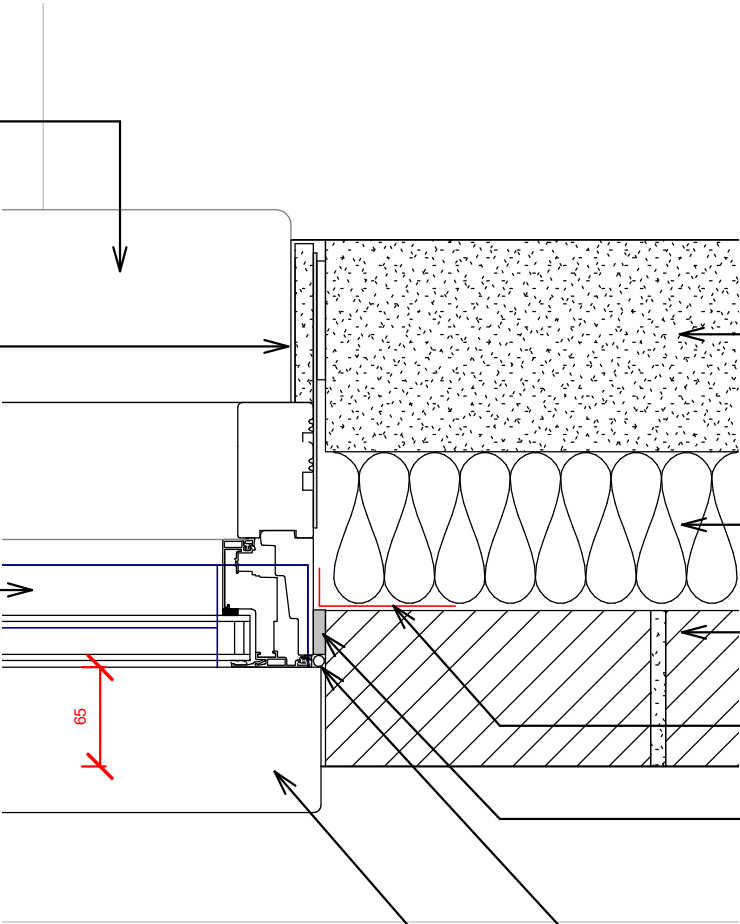

Blockwork to Structural Engineer's design. For decoration see architectural specification.

Cavity fully filled with 100mm mineral wool insulation, lambda value 0.032 or less.

Forterra 'Clumber Red' facing brickwork - see specification.

Vertical polyethylene DPC, minimum 0.5mm thickness

Compressible foam tape - Compriband or acceptable alternative

Continuous bead of black mastic

External cill in PPC aluminium, 2mm thick, colour to match window