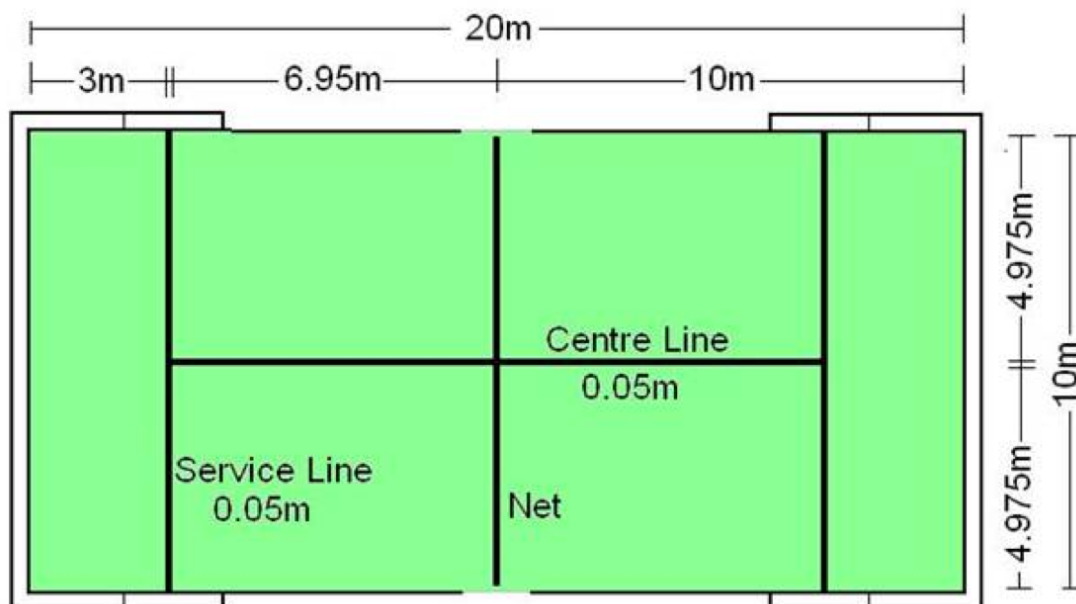

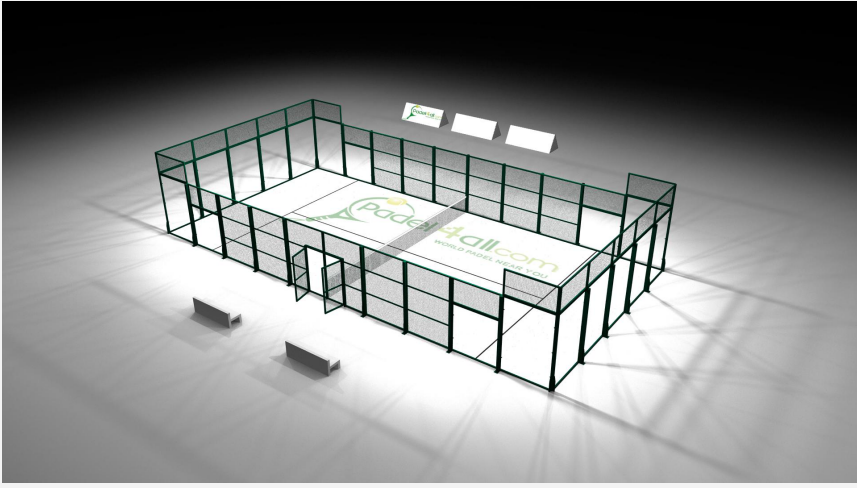

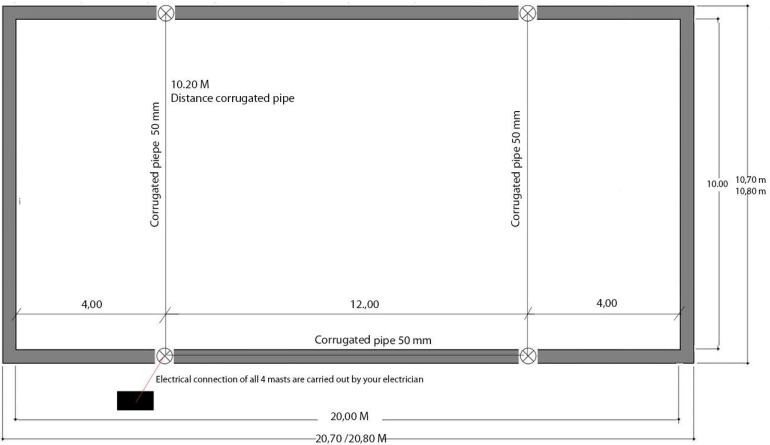


# Padel court Hyde Park / Regents Park November 2016:



		<b>DATA SHEET</b> OF YOUR PADDLE COURT		<a href="http://www.padel4all.com">www.padel4all.com</a>			
<b>Model</b>	<b>PREMIUM OUTDOOR</b>			<b>CONFIGURATION:</b> Manufacturer: Verdepadel Application: OUTDOOR			
				<b>Steel structure:</b> Tube type: Welded precision steel Steel Norm: EN 10305-5 Superficial treatment: galvanised Frame construction: 80 x 40 mm Columns reinforcement: 80 x 80 mm Steel Thickness: 2 mm Fence thickness: 4 mm Colour: RAL 6009 - Fir Green Doors: One side LED in corners: none			
				<b>Glass:</b> Single Security glass: YES Thickness: 12 mm Glass fixing: Standard			
				<b>Artificial grass:</b> Quality: NOT INCLUDED Stiches/m2: NOT INCLUDED Colour: NOT INCLUDED			
				<b>Lighting:</b> Number of spotlights: NOT INCLUDED Type: NOT INCLUDED Power required (W): NOT INCLUDED Height: NOT INCLUDED			
				<small>In case of no-match with the quote, the quote prevails.</small>			
				<b>CLUB NAME:</b> REGEND PARK - LONDON	United Kingdom	<b>Contact name:</b> Juan A. Cánovas	
				<b>CONTACT PERSON:</b> Mr. Steve Riley			<b>email:</b> info@padel4all.com
				<b>PROJECT NUMBER:</b> P-8114			<b>Date:</b> 5/08/2016

Strip foundation for the installation of 1 Paddle Court



As an alternative you can use a simple reinforced concrete slab with a slope on the short side (10m) of 0.7% -1%.

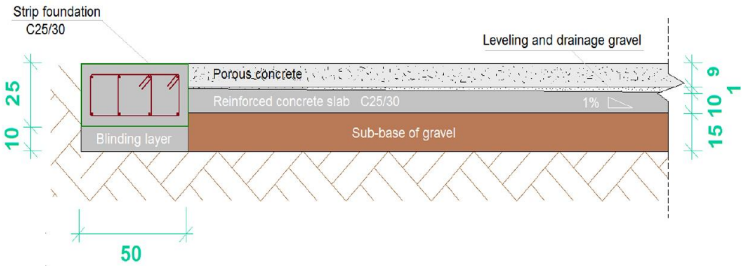
**IMPORTANT:**  
Strip foundations and reinforced concrete slabs must be protected from frozen underground water.

**EXPLANATION:**  
At a depth of around 80 cm, the soil temperature drops, even at icy Winters, never below 0°C, therefore the strip foundation needs to be frost-proofed at min. 80 cm, or with 100 cm it's even better. If water and ice will be collected under the foundation, it can push the foundation strips with tremendous upward force and would inevitably cracks and may lead to glass breakage.

This information is for your orientation. The final decision and responsibility is being taken by the contractors.

Verdepadel, as a manufacturer of Paddle Courts, is not taking any responsibility for the proper design and creation of the foundations.

Recommended cross-section for floor construction



**Width strip foundation:**  
BASIC & BASIC PRO: 35 cm  
PREMIUM: 40 cm



Foundation plans for PADEL COURT "STANDARD / PREMIUM"  
May 2015



