


TASK NO.	TASK/DESCRIPTION	NOTES
	H9 MISCELLANEOUS	
H9.01	<p data-bbox="411 389 644 423">Anti Bird Netting</p>  <p data-bbox="411 1283 1230 1458">Anti-bird netting is fitted to port and stbd shade decks and quarterdeck. Current netting is in poor condition and is no longer preventing birds from perching. RENEW anti-bird netting on shade decks with equivalent to current fitting. Quarterdeck anti-bird netting must be fireproof for 3m in all directions from quarterdeck access door due to flashover from door frame during door breaching exercises.</p> <p data-bbox="411 1469 991 1503">ALLOW for approximately 150m x 3m RENEWAL.</p>	

TASK NO.	TASK/DESCRIPTION	NOTES
	H9 MISCELLANEOUS	
H9.02	<p data-bbox="400 387 783 421">Toilet Block and Staff Office</p> 	<p data-bbox="1249 387 1450 510">To be completed in conjunction with H2.17 and H2.18.</p>



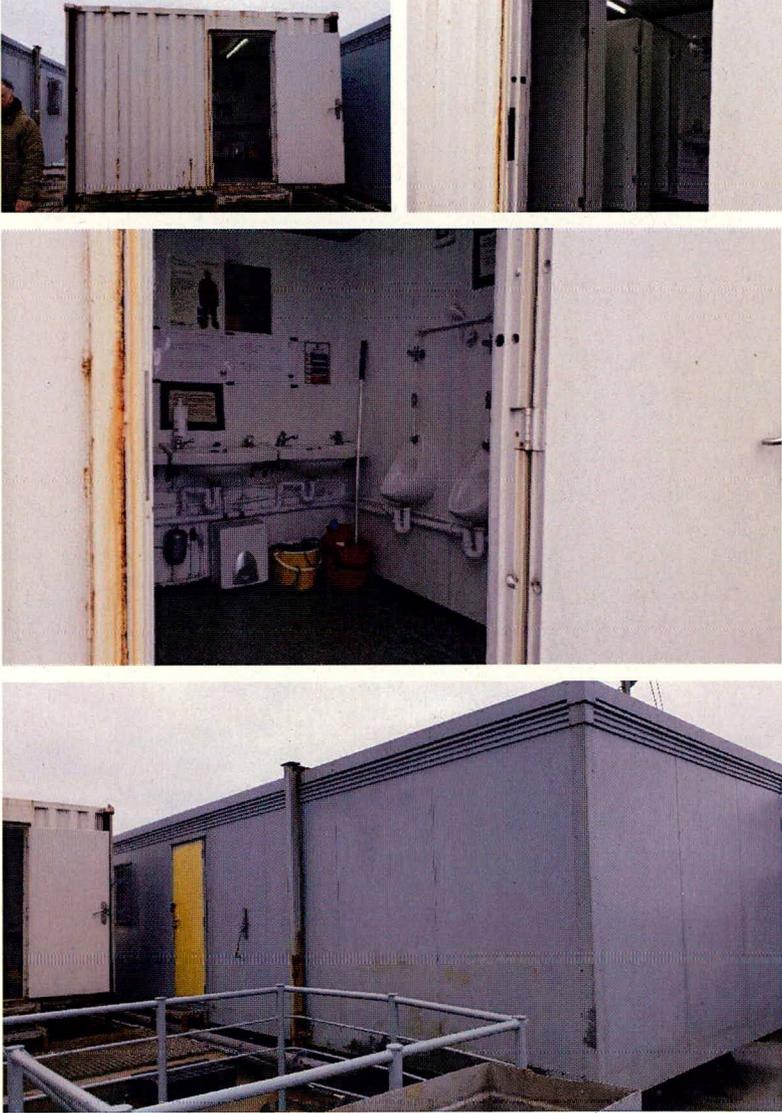

Currently 2 office units and 1 toilet unit fitted. Contractor to remove and dispose of existing units and supply and fit replacements (only 1 office unit required along with toilet unit).
Craneage will be required to remove existing and replace with new.
Current toilet block contains 3 x urinals, 3 x toilets and 3 x wash basins.
Existing unit dimensions(m) – Toilet block 2.75w x 3.6d x 2.6h
Office Block 12.3w x 3.7d x 2.6h
Office unit to contain changing area and kitchen area as per existing unit.