

600x600 4-Way Blow Ceiling Cassette Indoor Unit

PLFY-P-VFM-E



The PLFY cassette unit provides the smart solution to comfortable and efficient air conditioning. It combines a stylish square design slimline grille with the latest energy-saving technologies and is designed to fit snugly to ceilings making it ideal in both offices and retail.


Key Features

- New design - fits into narrow ceiling spaces with height of only 245mm
- Low noise levels - reduced noise value with 3D turbo fan
- Horizontal airflow - eliminating uncomfortable drafts and improved airflow control
- Easy installation - temporary hanging hook on grille and no screw removal for corner panel / control box
- 3D i-see Sensor Grille - optional 360° human body temperature, room occupancy and position sensor grille




INDOOR UNITS		PLFY-P15VFM-E	PLFY-P20VFM-E	PLFY-P25VFM-E	PLFY-P32VFM-E	PLFY-P40VFM-E	PLFY-P50VFM-E
CAPACITY (kW)	Heating (nominal)	1.9	2.5	3.2	4.0	5.0	6.3
	Cooling (nominal)	1.7	2.2	2.8	3.6	4.5	5.6
	UK Heating	1.9	2.5	3.2	4.0	5.0	6.3
	UK Total Cooling - Hi (Sensible)	1.50 (1.30)	2.00 (1.60)	2.50 (2.00)	3.20 (2.40)	4.00 (2.90)	5.00 (3.60)
POWER INPUT (kW)	UK Total Cooling - M1	1.48	1.84	2.38	3.06	3.78	4.78
	UK Total Cooling - Lo	1.41	1.84	2.24	2.91	3.51	4.41
	Heating (nominal)	0.02	0.02	0.02	0.02	0.03	0.03
	Cooling (nominal)	0.02	0.02	0.02	0.02	0.03	0.03
AIRFLOW (l/s)	Lo-M1-Hi	108-125-133	108-125-142	108-133-150	117-133-158	125-150-183	150-183-217
SOUND PRESSURE LEVEL (dBA)	Lo-M1-Hi	26-28-30	26-29-31	26-30-33	28-30-34	28-33-39	33-39-43
WEIGHT (kg)	(Grille)	14 (3)	14 (3)	14 (3)	15 (3)	15 (3)	15 (3)
	Width (Grille)	570 (625)	570 (625)	570 (625)	570 (625)	570 (625)	570 (625)
	Depth (Grille)	570 (625)	570 (625)	570 (625)	570 (625)	570 (625)	570 (625)
DIMENSIONS (mm)	Height (Grille)	245 (10)	245 (10)	245 (10)	245 (10)	245 (10)	245 (10)
	Height (Grille)	220-240v, 50Hz	220-240v, 50Hz	220-240v, 50Hz	220-240v, 50Hz	220-240v, 50Hz	220-240v, 50Hz
ELECTRICAL SUPPLY		Single	Single	Single	Single	Single	Single
PHASE		0,14 / 0,19	0,16 / 0,21	0,17 / 0,22	0,18 / 0,23	0,23 / 0,28	0,35 / 0,4
RUNNING CURRENT (A) Heating / Cooling		6	6	6	6	6	6
FUSE RATING (BS88) - HRC (A)		3	3	3	3	3	3
MAINS CABLE No. Cores		SLP-2FA	SLP-2FA	SLP-2FA	SLP-2FA	SLP-2FA	SLP-2FA
GRILLE MODEL REFERENCE							

Upper View

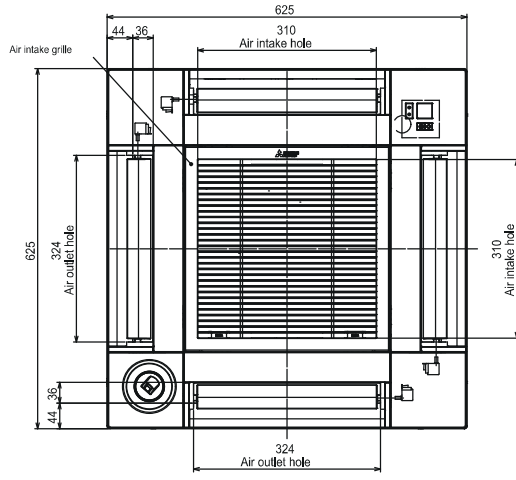

Lower View

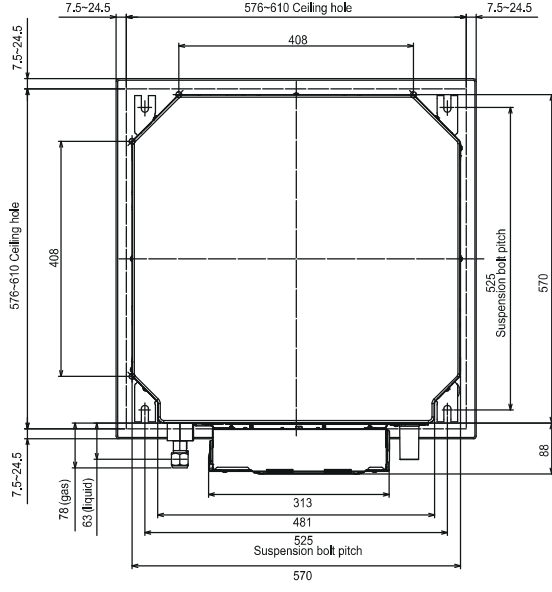

Side View

