

MEMORIAL GARDENS for SANCTUM 2000 memorial tablets

This contract to provide the foundations for the Memorial tablets (Sanctum 2000 manufactured by Oldlings/Barbican) laid out in two discrete areas "gardens" surrounded by planting (implemented by others).

This contract to

- carry out all groundworks including break out and removal of existing surfaces (concrete, bitmac and turf)
- prepare the base including regulating differences in levels.
- supply and install sub-base;
- supply and install concrete foundations (only) for the memorial tablets
- supply and install concrete flag paving 600mm square units, exact type to be agreed with the town council.


DESIGN requirements

The design should provide for the maximum number of memorial tablets without compromising accessibility.

- Minimum dimensions for circulation are shown on the plan.
- Paving laid to a fall to shed surface water as shown.
- foundations for memorials shall not be stepped.
- garden areas shall tie into the adjacent memorials zone and lie either side of the main axis point to the woodland area.

The outline layout indicates space for 70 and 54 memorials, if required this number may be varied, with approval of FTC.

NB care to be taken to avoid damage to tree roots of adjacent mature conifer.

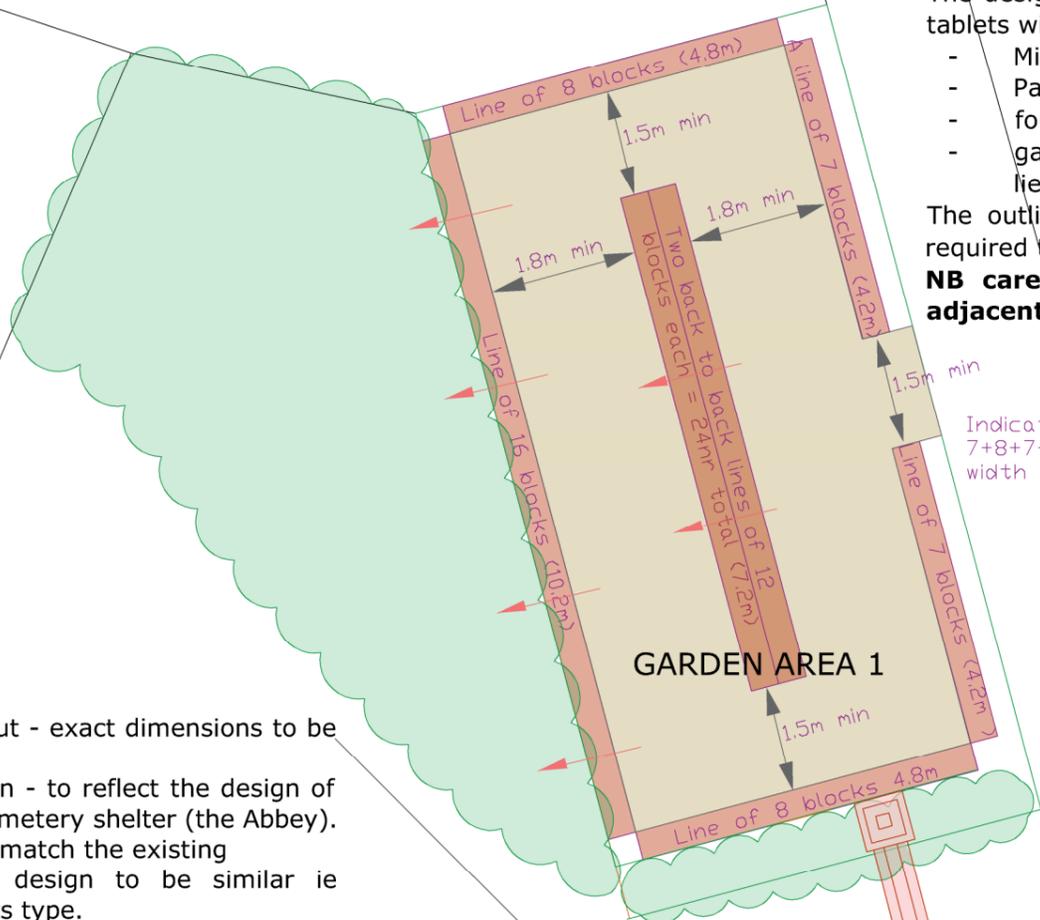

Indicative layout: TOTAL BLOCKS
 7+8+7+8+16+24=70 blocks
 width of paving 1.5m min-1.8m

ARCHWAY

Indicative layout - exact dimensions to be agreed.

Materials/design - to reflect the design of the existing cemetery shelter (the Abbey).

- Bricks to match the existing
- Style of design to be similar ie arts/crafts type.

Either use substantial brickwork piers with brick arch or if a wider arch is agreed, brickwork piers with a metal arch. See Project Brief for photographic examples.

PROPORTIONS

height 2.4m minimum - 2.5m
 width 1.8m minimum - 3m max
 piers at least 0.7m width
 coping/finial detail to be in keeping with the existing style in nearby building.
 Contractor to provide design drawings for approval.




NB: exact design dependent on further ground surveys - to be carried out by the contractor.

Existing ground is not level and comprises a mix of grass, bitmac and concrete. Existing hard surfaces will need to be broken out to achieve levels, and falls required for drainage. Foundations for memorials shall not be stepped.

NEW CENTRAL PATH

Existing central path

direction of fall - to allow for drainage of surface water down the natural slope beyond.

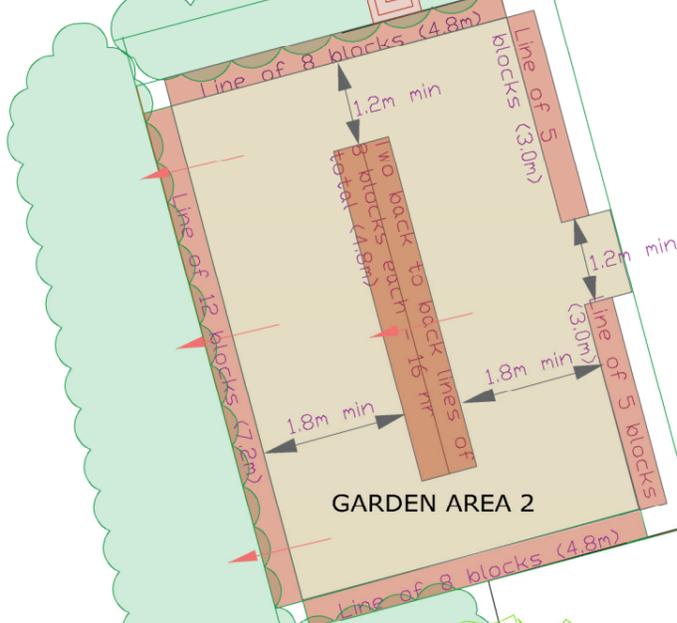

Indicative layout: TOTAL BLOCKS
 8+8+5+5+12+16=54 blocks
 width of paving min 1.2m-1.8m.

- NOTES
1. DO NOT SCALE FROM THIS DRAWING
 2. ALL DIMENSIONS IN MILLIMETRES UNLESS OTHERWISE STATED

© CROWN COPYRIGHT AND DATABASE RIGHTS 2013.
 ALL RIGHTS RESERVED. HCC 100019180

REV	AMENDMENTS	DATE	CAD	CHKD	APPD



DESIGNER CES	SCHEME RICHARD CLOSE CEMETERY FLEET		DRAWING TITLE Phase 1 proposal Garden Areas with Sanctum 2000 memorials	
CAD	JOB No.	DATE 04.04.18 rev A 25/5/18	SHEET NUMBER	DRAWING NUMBER 0000002 rev A
CHECKED	SCALE @ A1			REV
APPROVED				