


Shelter, foundation concepts, designs and drawings are copyright of Littlethorpe of Leicester Ltd and may not be copied altered or reproduce without prior written consent from Littlethorpe.

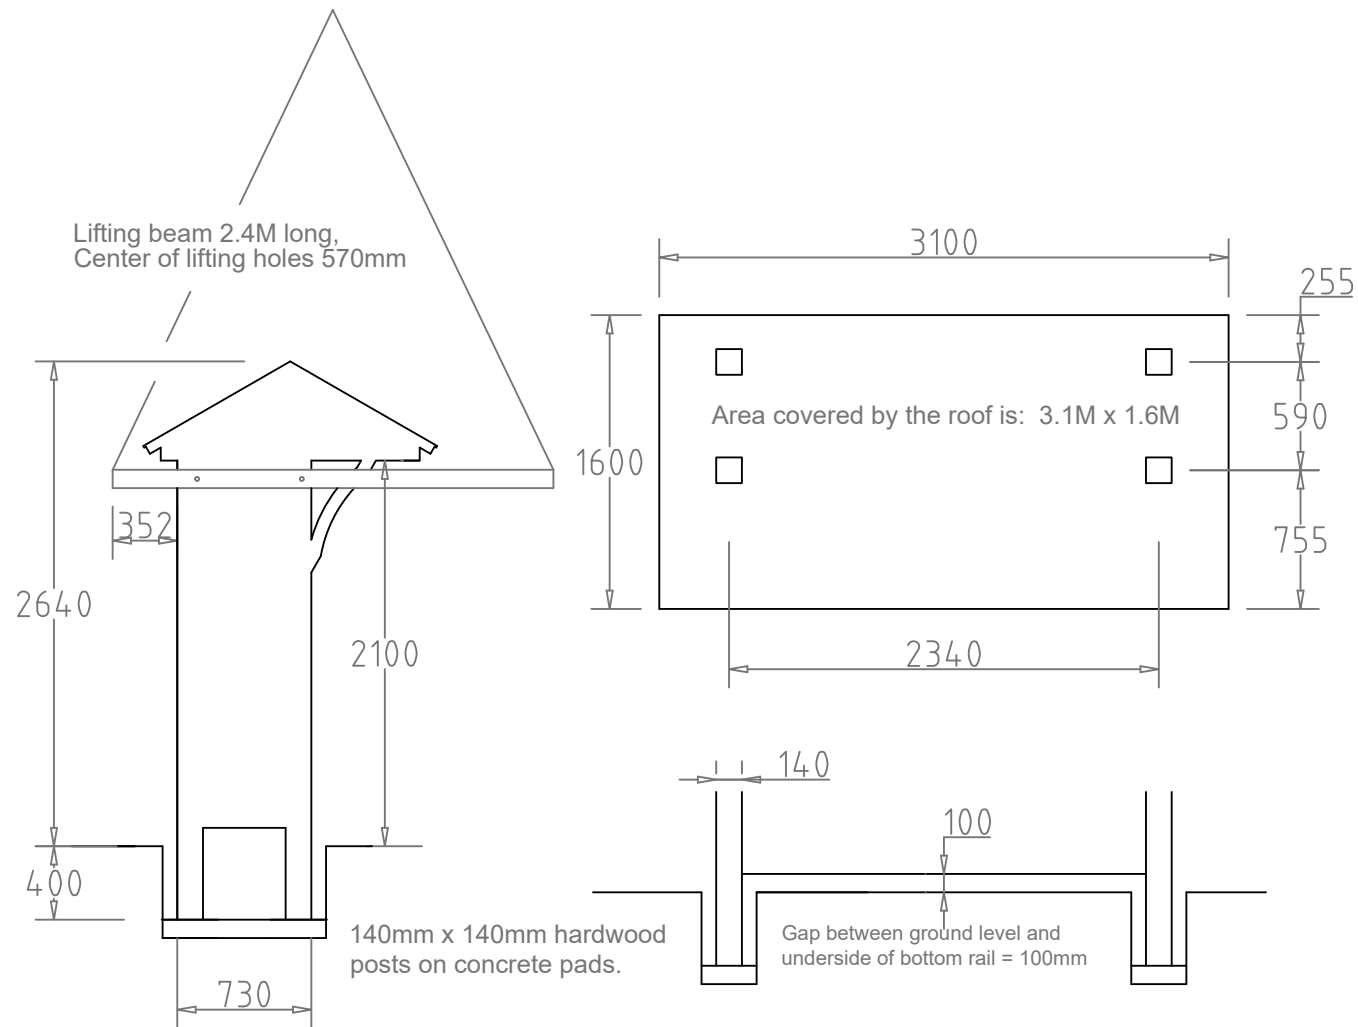

The legs should be seated on pad foundations of appropriate size and strength to support the weight of the shelter taking into account local ground conditions. Once the shelter has been made level the legs should be backfilled with an appropriate concrete or grout to retain the shelter laterally. Reinstatement should be as per the relevant highways specification for the type of base or pavement that the shelter is installed into. Where a new base is being installed it should be to the relevant highways specification.