



Nutmeg 1910
NCS S 1510-Y50R

w/r 1910
LRV 58.9




Alabaster 1600
NCS S 2005-Y10R

w/r 0630
LRV 59.4



Lavender Mist 1920
NCS S 2020-R40B

w/r 1920
LRV 52.4

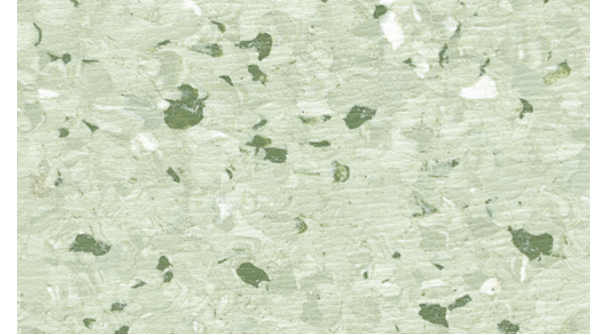


Thyme 1890
NCS S 1020-G40Y

w/r 1890
LRV 58.6




Cinnamon 1850
NCS S 1510-Y70R

w/r 1850
LRV 51

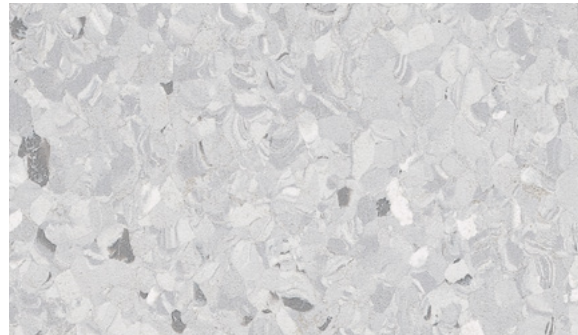


Ice Crystal 1950
NCS S 2002-R50B

w/r 1950
LRV 56.9

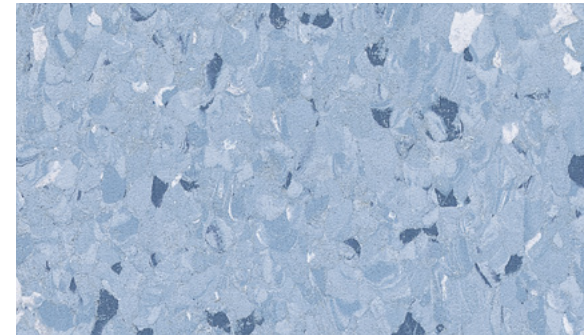

Pale Iris 1800
NCS S 2020-R90B

w/r 1800
LRV 39.3

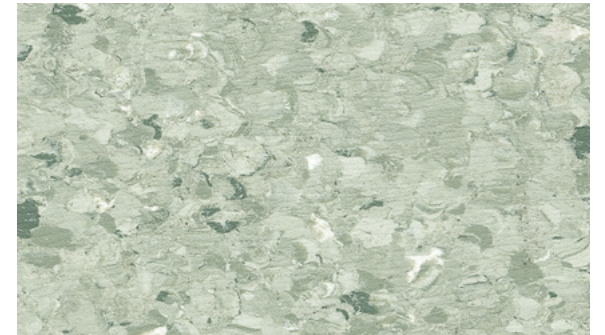

Chive 1880
NCS S 2010-G20Y

w/r 1880
LRV 48.4




Gingerlily 1860
NCS S 2020-Y60R

w/r 1860
LRV 49.2




Grey Marl 1930
NCS S 3502-R

w/r 1930
LRV 40.5

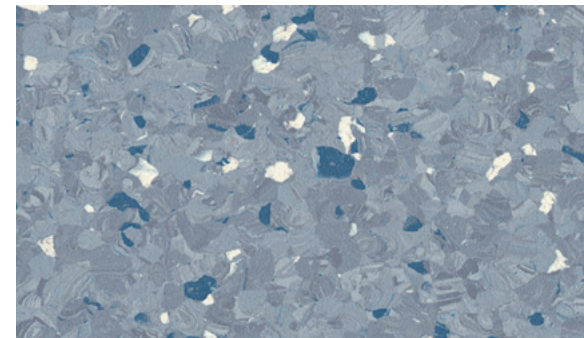

Stone Blue 1840
NCS S 4010-R90B

w/r 1840
LRV 30.3

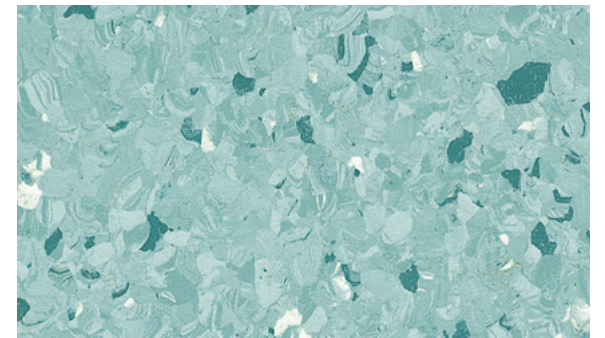


Peppermint 1870
NCS S 2020-B30G

w/r 1870
LRV 43.5




Chilli 1960
NCS S 3040-Y70R

w/r 1960
LRV 24.5

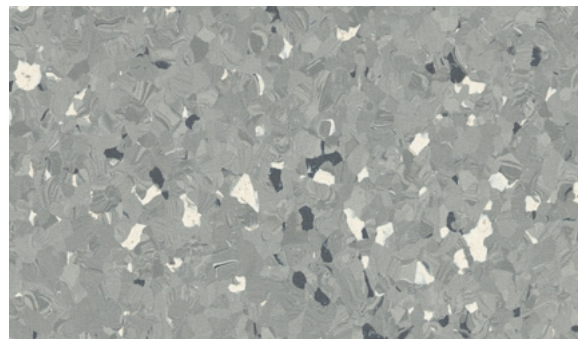


Clove 1830
NCS S 4502-B

w/r 1830
LRV 31.8

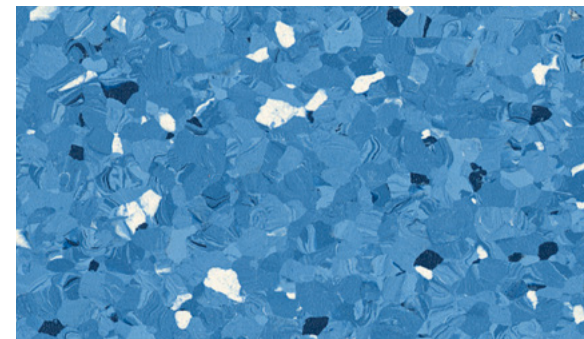

Bilberry 1900
NCS S 3040-R90B

w/r 1900
LRV 23.3

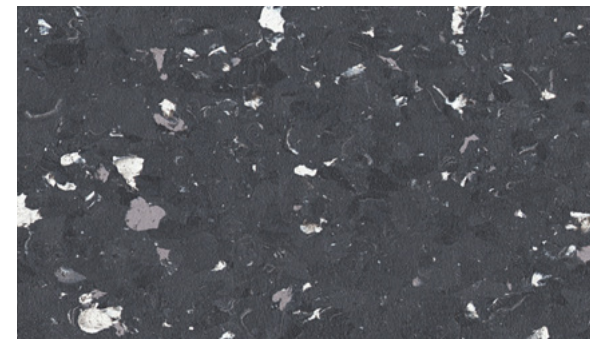

Liquorice 1940
NCS S 6500-N



















w/r 1940
LRV 9.3

Prestige PUR

Attractive, high performance, heavy duty homogeneous floorcovering with a polyurethane reinforcement for low cost, lifetime polish free maintenance.

Featuring a non-directional duotone decoration, with tonal highlight chips, Prestige PUR is available in a broad palette of sophisticated colours. Demonstrating outstanding durability and abrasion resistance, Prestige PUR is recommended for use throughout commercial interiors, healthcare and education facilities, as well as retail outlets.



	Gauge	EN 428/ISO 24346	2.0mm
	Roll Size	EN 426/ISO 24341	2m x 20m = 40m ²
	Tile Size	EN 427/ISO 24342	300mm x 300mm = 4.5m ² 608mm x 608mm = 5.17m ²
	Total Weight	EN 430/ISO 23997	2950g/m ²
	General Performance	EN 649/EN ISO 10581 ASTM F1913 ASTM F1700	Conforms Conforms Conforms
	Use Area	EN 685/ISO 10874	   
	Reaction to Fire	EN 13501-1 ASTM E662 ASTM E648	Class Bfl-S1 <450 Class 1
	Abrasion Resistance	EN 660-2 EN ISO 10581	Group T Type I
	Slip Resistance	EN 13893 AS/NZS 4586 DIN 51130	Class DS R9 R9
	Indentation Residual	ASTM F970 (Modified)	Static load 750psi
	Electrical behaviour (body voltage)	EN 1815	≤2kV Classified as 'antistatic'
	Castor Chair (continuous use)	EN 425/ISO 4918	Suitable
	VOC Emissions	Indoor Air Comfort GOLD AgBB VOC test Floorscore Finnish MI Classification Swedish B.P.D (FLEC test) GBCA/NZGBC Green Star IEQ-VOC	Eurofins certified product Pass Certified Pass Best Class Compliant
	Responsible Sourcing	BES 6001	Very Good
<p>Agrément Assurance - Polyflor Prestige PUR has been independently assessed by the British Board of Agrément and product performance is assured for at least 10 years in recommended use areas. With proper maintenance, the appearance and colour will be retained during this period.</p>			
<p>Environmentally Preferable Flooring - Polyflor Prestige PUR achieves a BRE Global Environmental A+ Rating (Certificate No: ENP 472) in major use areas such as education and healthcare and is Green Tag LCA Rate certified with GreenRate level A - Gold Plus. Generic EN 15804 Environmental Product Declaration (EPD) available on request. Prestige PUR is 100% recyclable and contains 25% recycled material. Recyclable via the Recofloor scheme. Visit www.polyflor.com/sustainability.</p>			
<p>PUR - Polyflor Prestige PUR features a high quality, cross-linked polyurethane reinforcement, UV cured to provide a low-cost, polish free maintenance regime for the lifetime of the flooring.</p>			
	<p>Hygiene - All Polyflor commercial sheet vinyl ranges provide a continuous, impervious and hygienic flooring solution which can be confidently cleaned in accordance with recommended maintenance procedures and approved maintenance products. The implementation of an effective cleaning regime is the most important defence against infection.</p>		
	<p>Polyflor homogeneous PUR ranges are compatible for use with the most commonly used alco-based hand gels and are suitable for steam cleaning on a periodic basis. For information regarding handling and installation, adhesives, maintenance, applications, chemical resistance and product warranty, consult Polyflor Customer Technical Services on +44 (0)161 767 1912, or email tech@polyflor.com. The data presented is correct at the time of printing. For latest information, please visit our website polyflor.com. Decoration and shade may vary slightly from the samples shown.</p>		

