



AWZILED10/PIR

Zion LED Polycarbonate Floodlight - PIR - 10W Cool White - White



Features

Compact and economic polycarbonate LED floodlight.

10W LED ideal for halogen replacement.

Polished faceted reflector and textured polycarbonate for optimum performance.

Bracket design allows installation without removing mounting bracket.

Pre-wired with 500mm of rubber insulated cable for ease of installation.

PIR versions complete with manual override facility.

LED lifespan L70 25,000 hours.

Non-dimmable.

Bracket design allows installation without removing mounting bracket

General Information

Lamp Type	LED
Colour / Finish	White
IP Rating	IP65
IK Rating	IK08
Class Protection	1
Internal / External	Internal / External
Surface / Recessed / Suspended	Surface
Warranty (Years)	3
CE Mark	Yes
Width (mm)	119
Height (mm)	157
Depth (mm)	44


Technical Information

Wattage	10W
Lumens Delivered	843lm
Lm/W	84lm
CRI	Ra 70
CCT	4000K
Input	230V
Hertz	50Hz
Operating Temp	-10 to 40°C

Technical Data - ETIM - Downlight/spot/floodlight (EC001744)

Suitable for surface mounting	Yes
Suitable for built-in mounting	No
Suitable for wall mounting	Yes
Suitable for suspended mounting	No
Suitable for ceiling mounting	No
Suitable for traverse mounting	No
Suitable for light-track mounting	No
Adjustability	Swivelling
With movement sensor	Yes
With light sensor	No
With light source	Yes
Material housing	Plastic
Nominal voltage	230-230 V
Control gear included	Yes
No dim function	Yes
Light distributor	Reflector
Degree of protection (IP)	IP65
Impact strength	IK08
Protection class	I
Max. system power	10 W
Colour of light	White
Colour temperature	4000-4000 K
Colour rendering index CRI	70-79
Rated luminous flux acc. IEC 62722-2-1	843 lm
Lamp efficacy	84 lm/W

Width	25 mm
Height/depth	157 mm
Length	119 mm

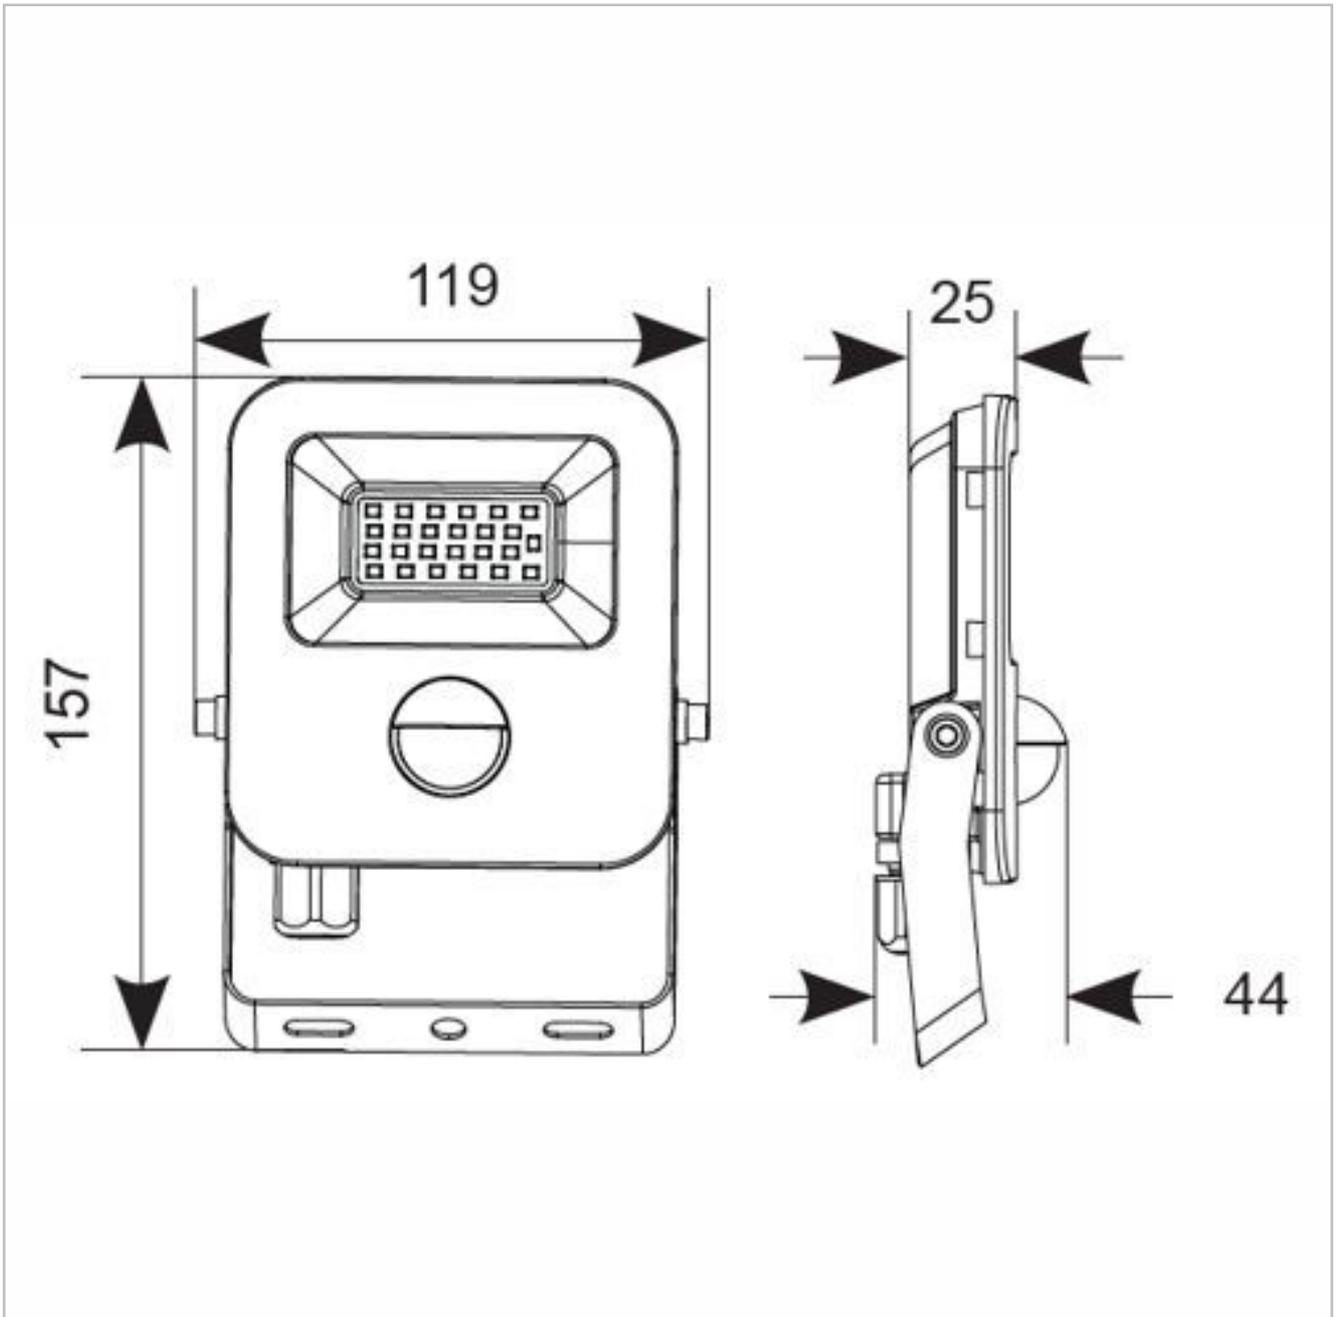

Datasheet generated from <https://onetimepim.com> last updated Tuesday, June 23, 2020 10:37:27 AM