

GENERAL NOTES:

- 1) The client has already dismantled and remove all existing museum artefacts to a secure off site climate controlled store for the duration of the contract.
- 2) The larger exhibits, looms etc, will stay in situ and have a temporary plywood boxing constructed around them for the duration of the contract. The plywood boxing will be removed by the client following completion of the contract.
- 3) Existing ventilation ductwork is to be retained and adapted to suit the revised layout.
- 4) Inserted walls, boxing to columns, exhibition display cases (except where shown), museum fixtures and fittings, to be removed to expose the building's steel frame, concrete ceiling and concrete floor.
- 5) Mechanical & Electrical removals; Refer to IDP M&E drawings.
- 6) Mechanical & Electrical removals; Refer to IDP M&E drawings.
- 7) Room Data Sheets clarify further details

Proposed Store Area:

Radiator to be repositioned. Refer to M & E details.  
Remove wall mounted fire extinguisher and associated board. Refix on wall in area of DS8 - Exact position to be confirmed

ST3: Remove all galvanized steel stair and dispose off site. Refer to drawing 976•390 for retained sections

DS8: Remove door and adjacent section of partition. Refer to drawing 976•349.

Kitchen. Remove all worktop, units, sink, high level cupboards and tiling and dispose off site.  
Retain pipework as M&E details.

WS26: Break out brick infill to former window and surrounding brickwork to form new opening. See lift drawings 976•330+ for proposals.

Remove 1990's passenger lift, including all associated fixtures and fittings.

Lift entrance. Remove inserted brickwall, steel lintel and steel bulkhead above.

Make good high level brick arch above DS3.

Form new opening in east wall as shown. Refer to detail 976•348.

Doors DS1 to be replaced as per door schedule.

WS21 & WS22. Remove internal boarding and associated framework and dispose off site.

Cast iron soil vent pipe to remain in situ.

Remove wall boxing and dispose off site

Remove all former castle display as shaded to expose concrete floor. Include for removal of all debris as piled up. Dispose all off site.

Existing steel beams and columns encased with sprayed concrete flocking. Remove all flocking as noted on drawing 976•305

Carpet: 190m2 approx. (lightly hatched area)

Remove carpet and all associated underlays and accessories to expose concrete floor surface. Dispose all off site.

Make separate allowance for removal of carpet glue / adhesives to achieve clean concrete surface ready for redecoration. Refer to finishes schedule.

Remove all secondary timber floor up to break line in boards as marked. Dispose all of site.

Spinning jenny to remain in situ. Protections by others to meet stringent loan conditions. Leave all protections in situ for the duration of the contract and do not disturb.

Existing high level ventilation ductwork shown by dashed line. To be kept in situ.

Display: Carefully remove remaining display to include: Brick walls, false ceiling and timber structure, floor and boards, door and false windows, and all ancillary fixtures and fittings. Dispose all off site.

ST2: 1990's precast concrete stair and steel handrails. Blockwork walls and flush timber doors.

Existing plant rooms to be retained

Retain all vertical timber cladding to south and east walls

Retain laminate floor in situ.

Area shaded grey. Remove vinyl and dispose off site. Prepare floor to accept new vinyl.

DS9 door leafs to be removed and dispose off site. Frame and partition above to remain in situ.

Remove basin and tiling to achieve details as drawing 976•353.

WS39 Glazing and timber frame to be removed and replaced with solid partition. Dispose all off site.

Remove all partition and DS22 and dispose off site. Make good plasterwork.

Display case to be retained in situ. Clad with 18mm sterling board on independent structure to protect units during works. Agree details prior to proceeding.

Client intention is to sell racking and associated raised floor prior to contractor starting on site.

Remove blinds to windows WS4 & 5. Dispose off site. Remove blinds from WS37 & 38 and set aside in store for potential reuse.

WS1 & WS2: Carefully remove internal shutters to enable window works. Replace shutters and add seals as detail 976•410/x


Remove partition wall between S12 & S14 including DS23 - as shaded. Dispose all off site.

S14 display unit. Remove all angled wall, door, floor, window and ceiling. Dispose all off site.

Boxed in machines to remain in situ for the duration of all works.

Remove all central display units as hatched red to create open plan space. Dispose all off site.

Remove blinds to windows WS4 & 5, and hand to client.

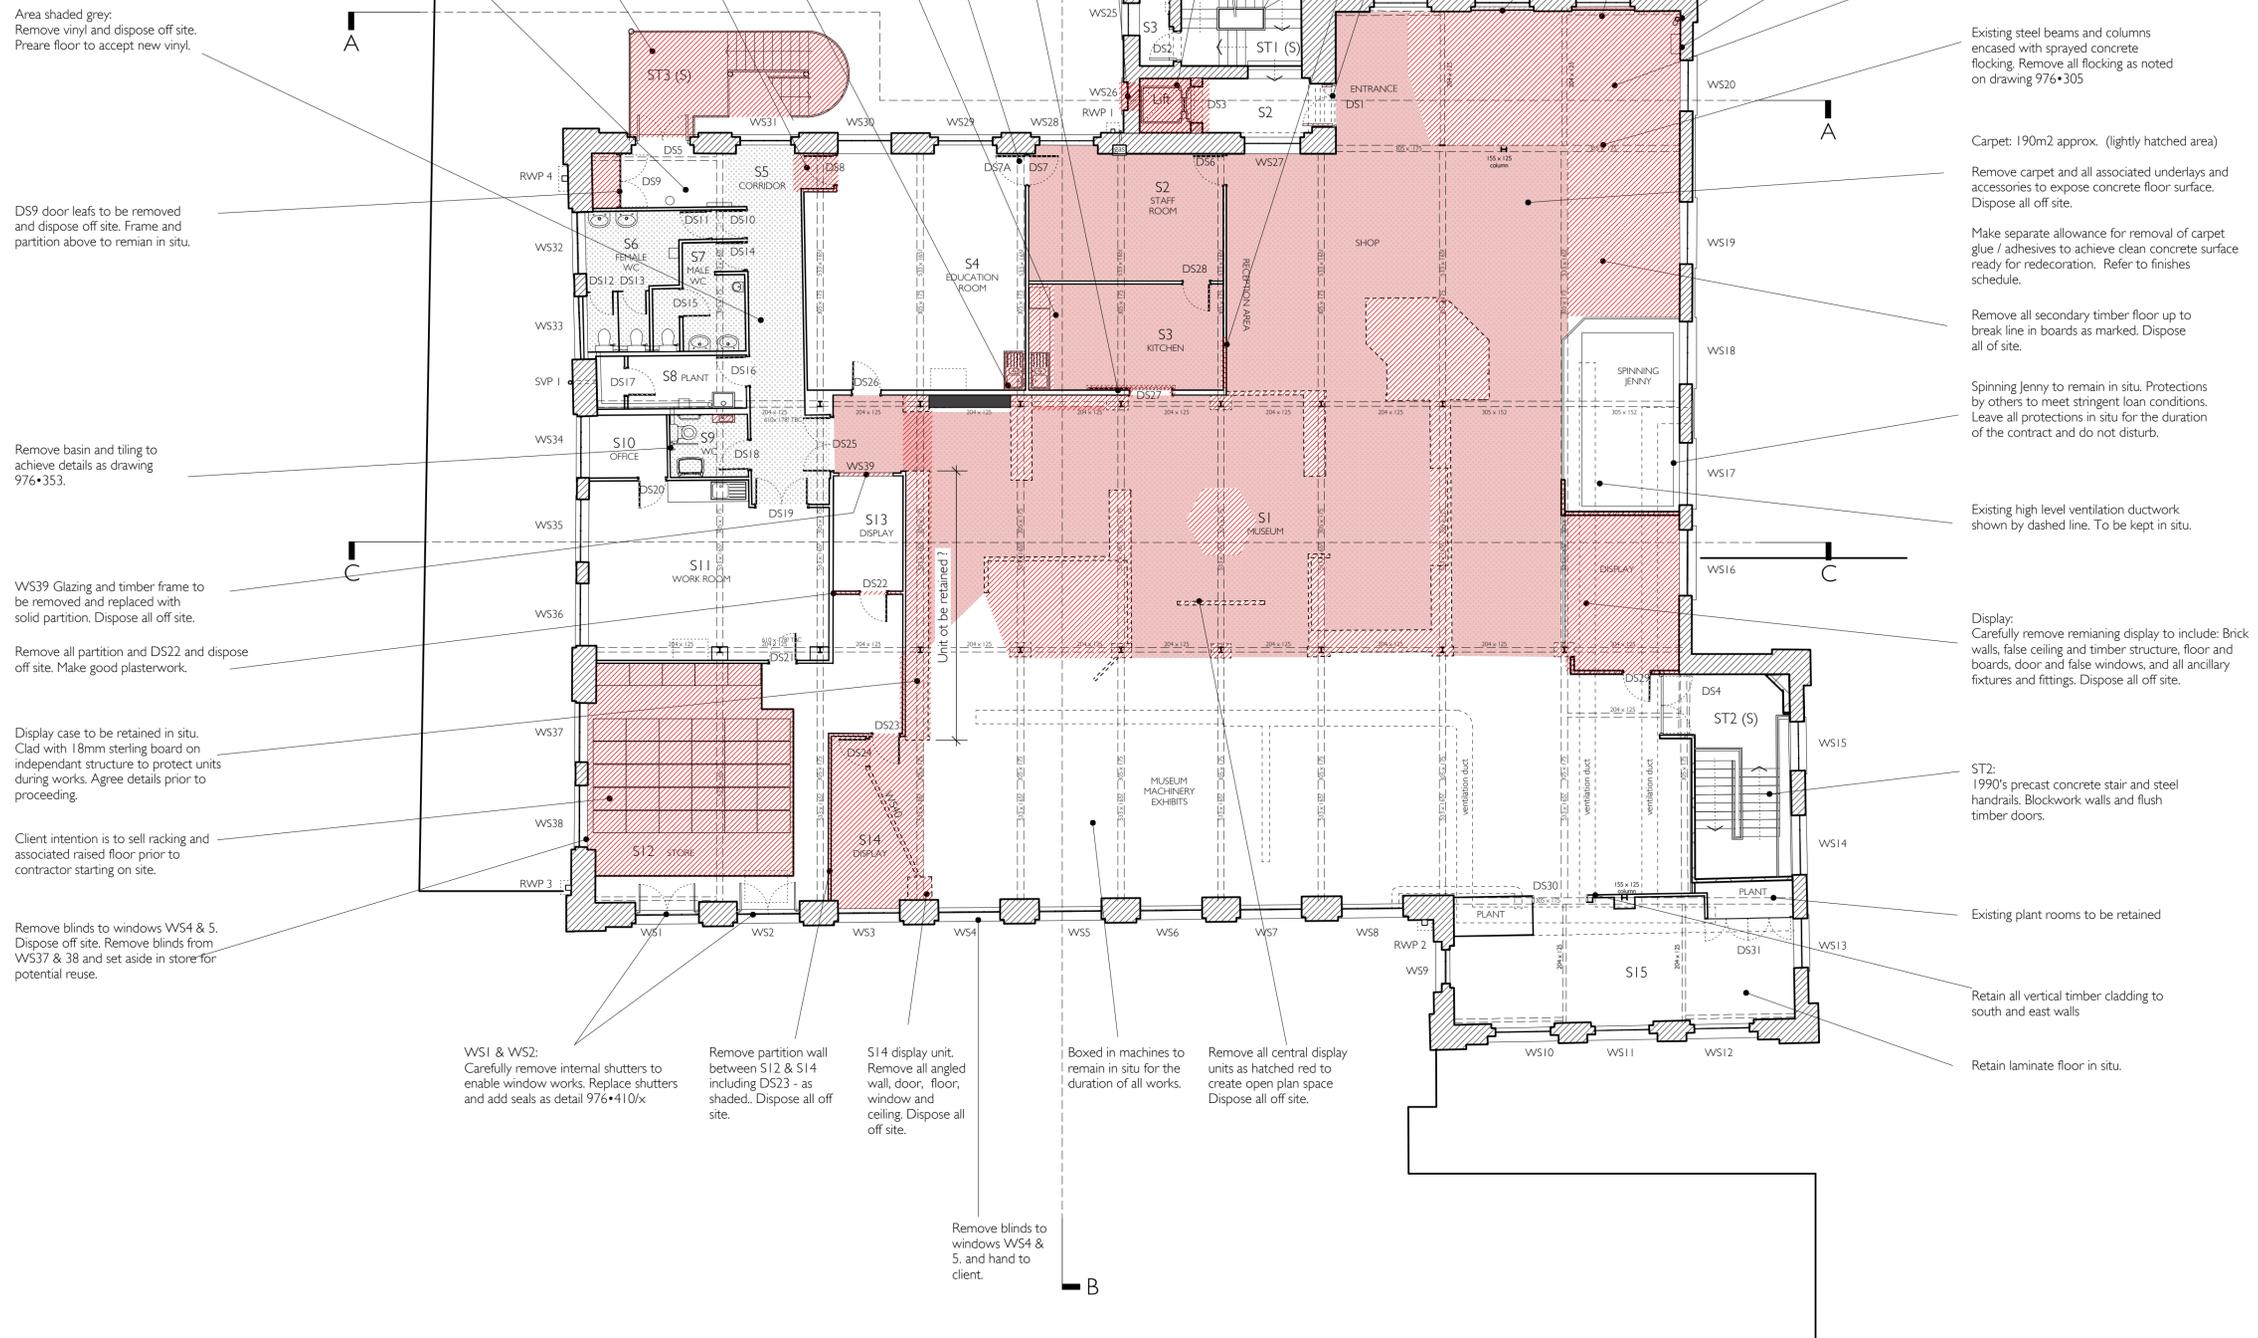

Rev E : 18 / 10 / 2018  
All notes and hatches updated

Rev D : 08 / 02 / 2017  
Notes updated; partitions to S10 and S13 to be removed; DS26 to be blocked and new doorway formed; DS8 and associated partition to be removed and infilled. Demolitions shown hatched.

Rev C : 06 / 07 / 2016  
Updated following client meeting

Rev B : 29 / 06 / 2016  
Section Lines updated. Demolition hatches and notes added.

Rev A : 15 / 06 / 2016 To  
References Updated.

Initial Issue : 09 / 06 / 2016  
To Building Regs

976 / 102E

