External Works Phase 2
Demolition Plan
1:100@A1

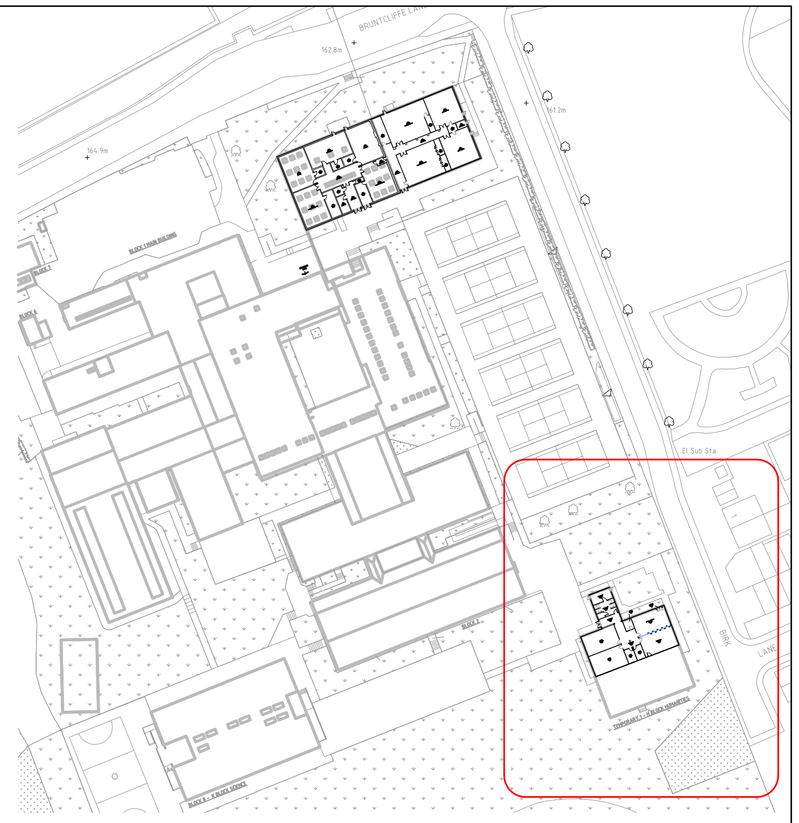

Strip Out Works:

Remove and dispose off site 3 linear metres of existing hedgerow to perimeter of proposed public access gate as detailed.

Remove and dispose off site 1.2 linear metres of existing perimeter steel palisade fencing to area shown.

Excavate 7m2 of existing soft landscaping up to site boundary as shown on drawing allowing for a minimum depth of 170mm for new tarmac path construction.

Remove existing tires, fencing and planters and dispose off site, cut indicated grass areas and re-seed where reqired.(115m2)

	Excavate existing soft landscaping down to a minimum depth of 170mm.
	Renovate existing play space removing rubbish and trimming grass areas.
	Hedgerow to remove

REV	DESCRIPTION	DATE	DRAWN	CHECKED

David Yeadon Ltd

Unit 15(2)D Springfield Commercial Centre, Bagley Lane, Farsley, Leeds LS28 5LY
Tel: 0113 236 1888 Fax: 0113 236 3715 Email: enquiries@davidyeadon.com

CLIENT
Bruntcliffe Academy
ADDRESS
Bruntcliffe Lane, Morley, Leeds, LS27 0LZ

DRAWN
CAB
DATE
May 2017

PROJECT
Temporary Accommodation at Bruntcliffe
DRAWING
External Works Phase 2 Demolition Plan

SCALE
1:100@A1
DRAWING No.
DY/1431-4-01