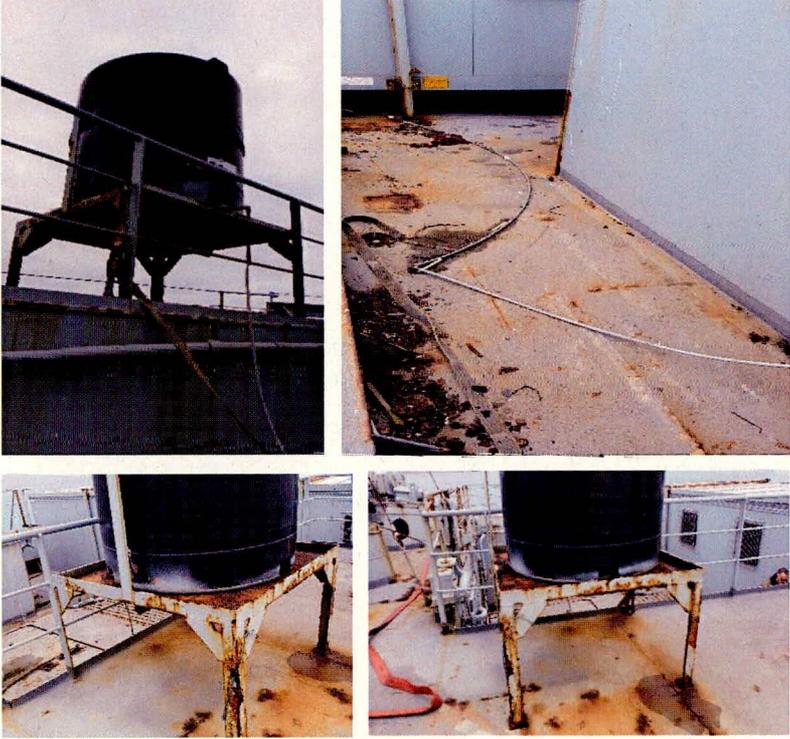
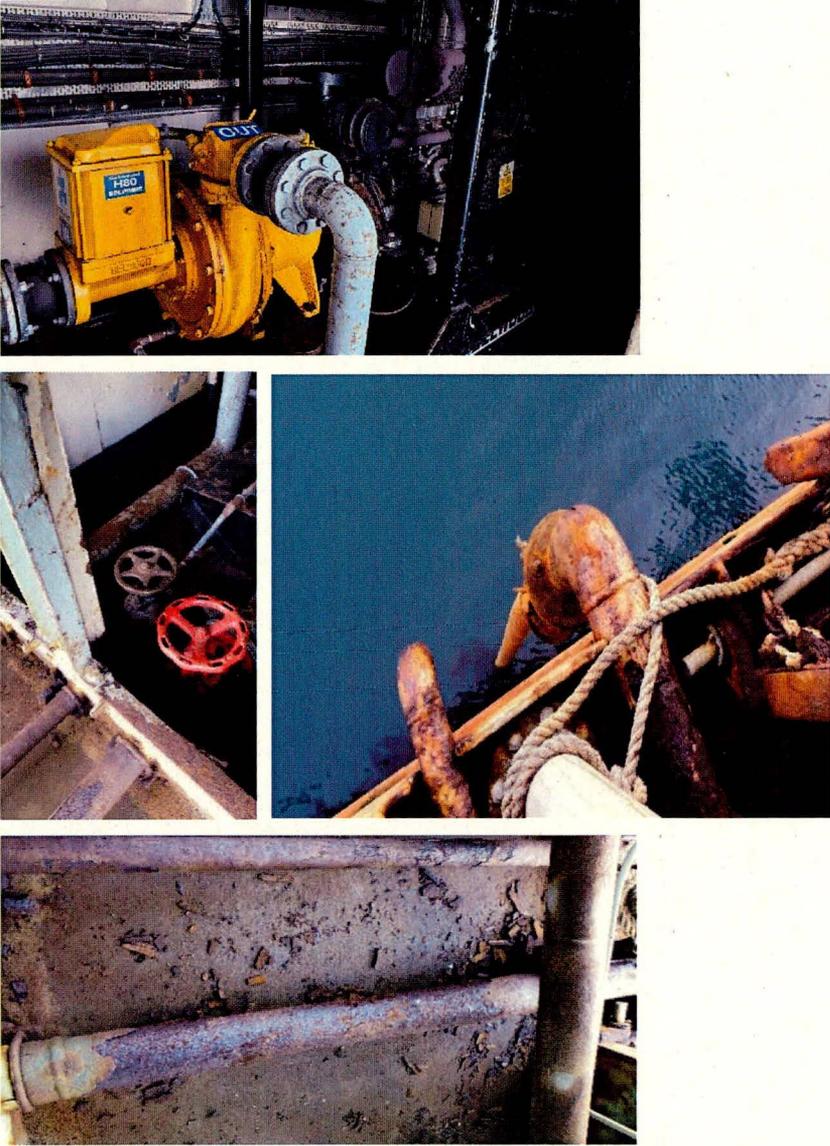


TASK NO.	TASK/DESCRIPTION	NOTES
M1.02	<p data-bbox="400 421 1110 454">Sanitary Supply Tank, Support Frame and Pipework</p> <div data-bbox="400 472 1190 1211">  </div> <p data-bbox="400 1227 1214 1395">RENEW the gravity feed sanitary header tank along with its support frame (1.35m x 1.35m x 0.85m). Replacement tank capacity 1300litres +/- 100 litres. Contractor to remove and dispose of existing fit. The supply pipework also requires renewing and run to the new toilet block module (15mm pipework, approx. 10m). Steel support frame and deck area to be REPRESENTED on completion.</p> <p data-bbox="400 1413 847 1440">ALLOW for 10m² REPRESENTATION.</p>	<p data-bbox="1249 427 1450 595">Hot work Required – Appropriate precautions to be taken in accordance with General 8.4.</p> <p data-bbox="1249 622 1450 734">IAW Paint scheme -General 12 and Annex B refer.</p> <p data-bbox="1249 763 1450 846">To be completed in conjunction with H9.02.</p>

TASK NO.	TASK/DESCRIPTION	NOTES
M1.03	<p data-bbox="408 389 584 421">HPSW Pump</p>  <p data-bbox="408 1599 1251 1711">The diesel driven HPSW Pump is no longer required and is to be removed, along with the pipework leading to the HPSW ringmain, where it is to be blanked, and the suction pipework and associated fittings from waterline to pump. The contractor is responsible for disposal.</p>	

References

1. Asbestos Survey – Conducted by Lucion – Dated 04 Jan 2012
2. Naval Authority - Ships Structure Survey
3. Naval Authority - Watertight Integrity Survey
4. Naval Authority - Escape and Evacuation Survey
5. International Load Line Convention 1966 and Protocol 1988 - Amending Resolutions since 1988 Regulation 25 (2) & (3)