


Broomfield Village Hall – Tender for resurfacing and relining existing car park.

Closing date 1st May 2020



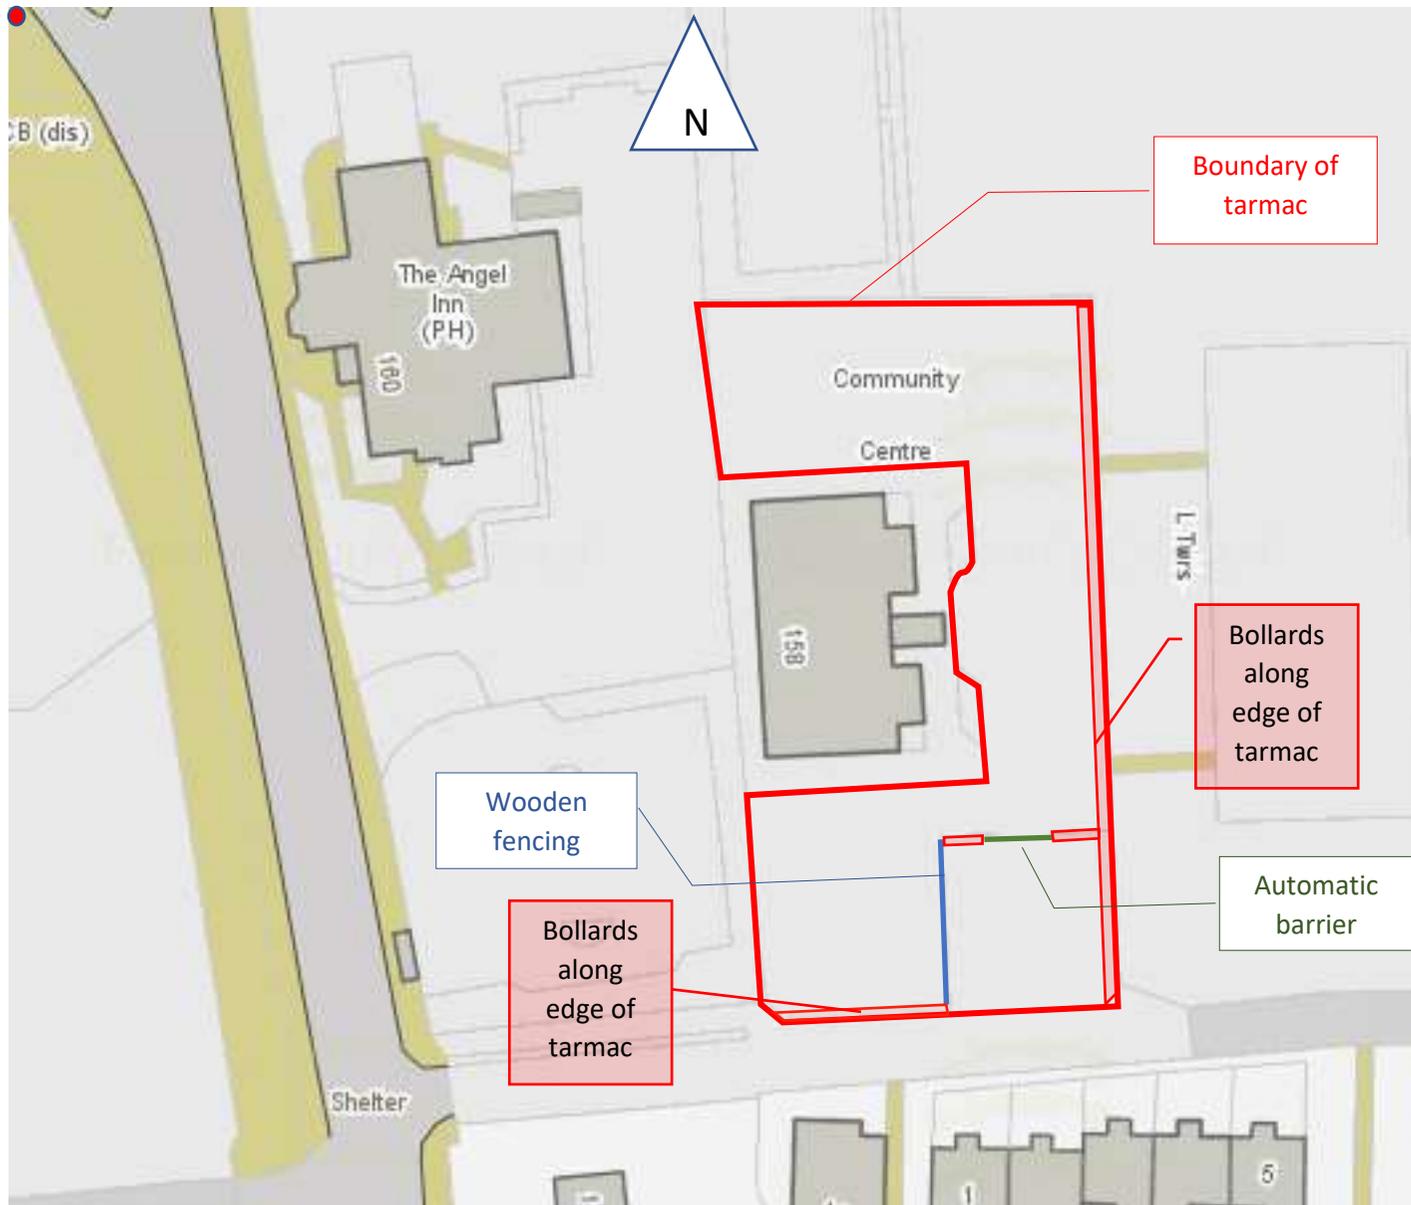

The site to be resurfaced is approximately 67 x 36m surrounding the hall on a plot 24 x 26m; approximately, 1790m².

The base of the current carpark is understood to be sound, and the work will be limited to removing the existing top surface, levelling, relaying the new surface then relining the parking bays. Drainage is currently adequate.

There are bollards along the eastern length of the tarmac and part of the southern length. There is a wooden fence partitioning one area of the carpark and bollards on either side of an automatic barrier. It is intended to keep all these features but the tender should provide a separate price for installing a second kerb on the inside of the bollards and filling the space with shingle.