




rev	date	amendment	dwn	chkd
A	07.06.19	Roof tiles updated to Bold Roll shape. Plinth bricks changed to regular, aluminium window sill added. Canopy soffit changed to cement board.	cad	gt
B	20.07.19	60-min fire compartmentation added; stairs updated	CAD	GT

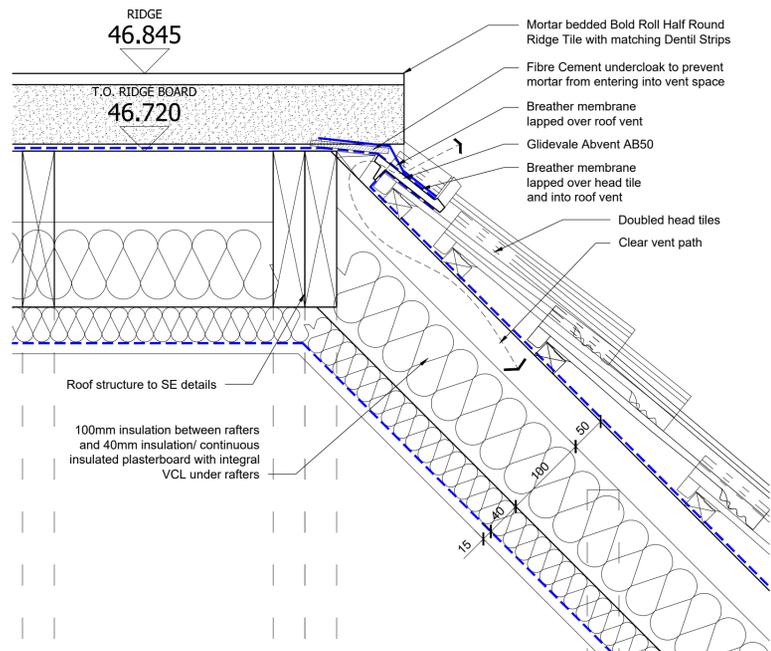


51 Typical ridge and tile roof junction

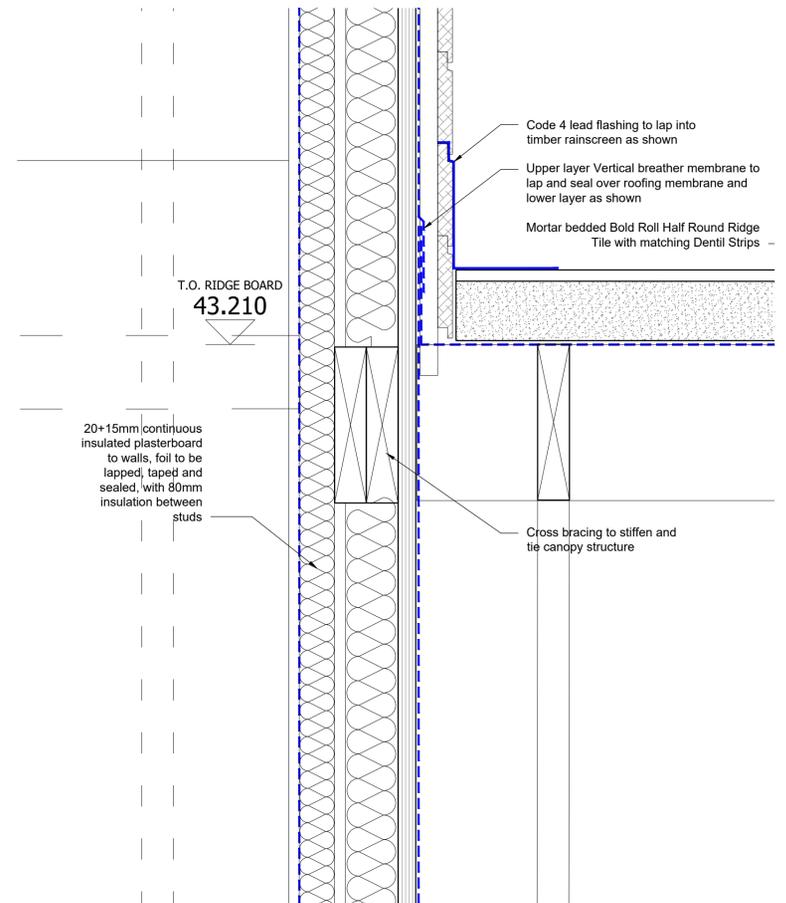


52 Entrance Canopy Top Connection Detail

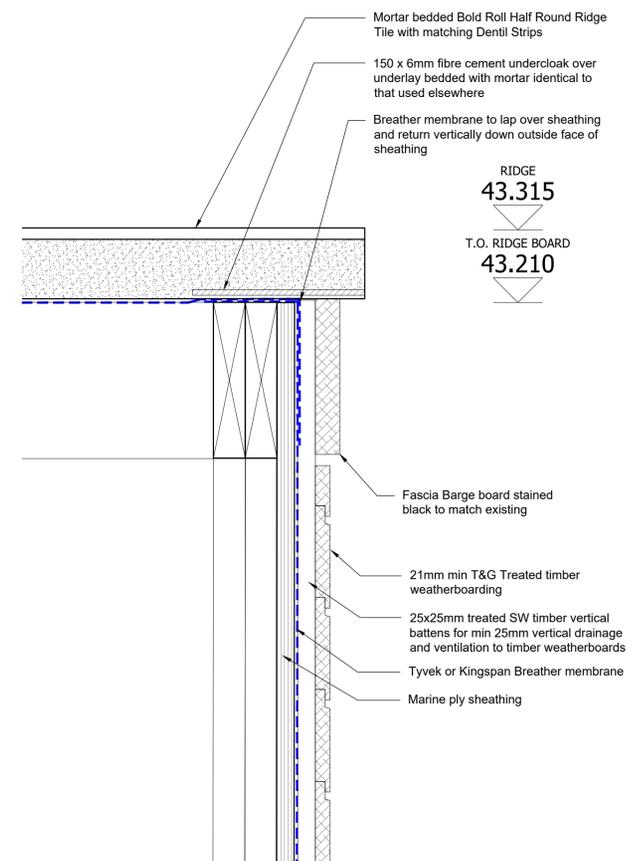


53 Entrance Canopy Top Detail

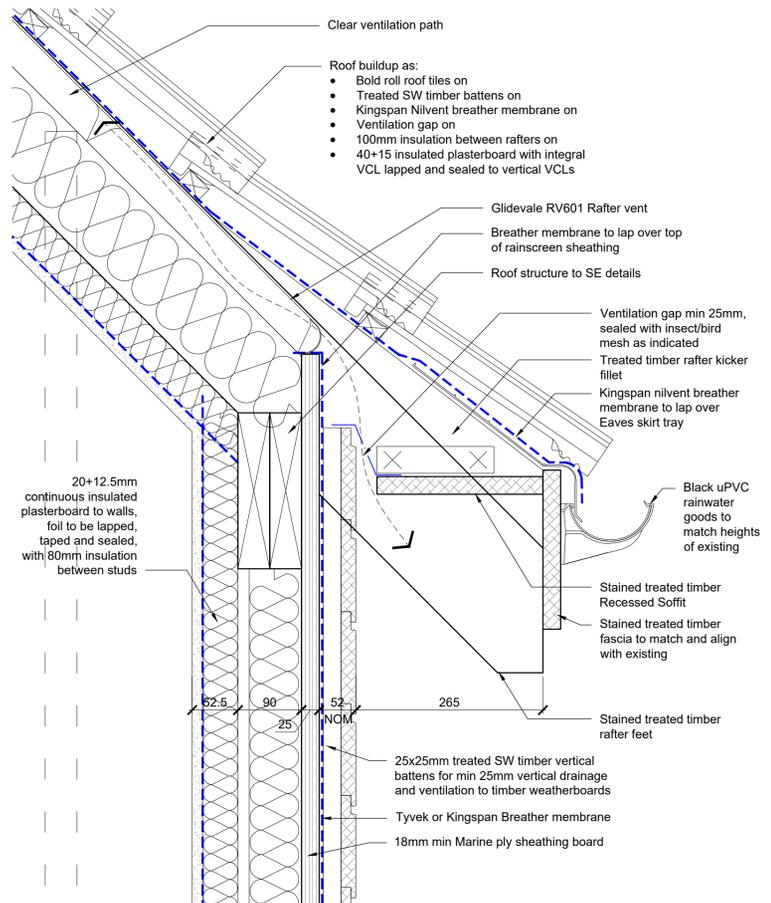

54 Eaves detail above new council office entrance

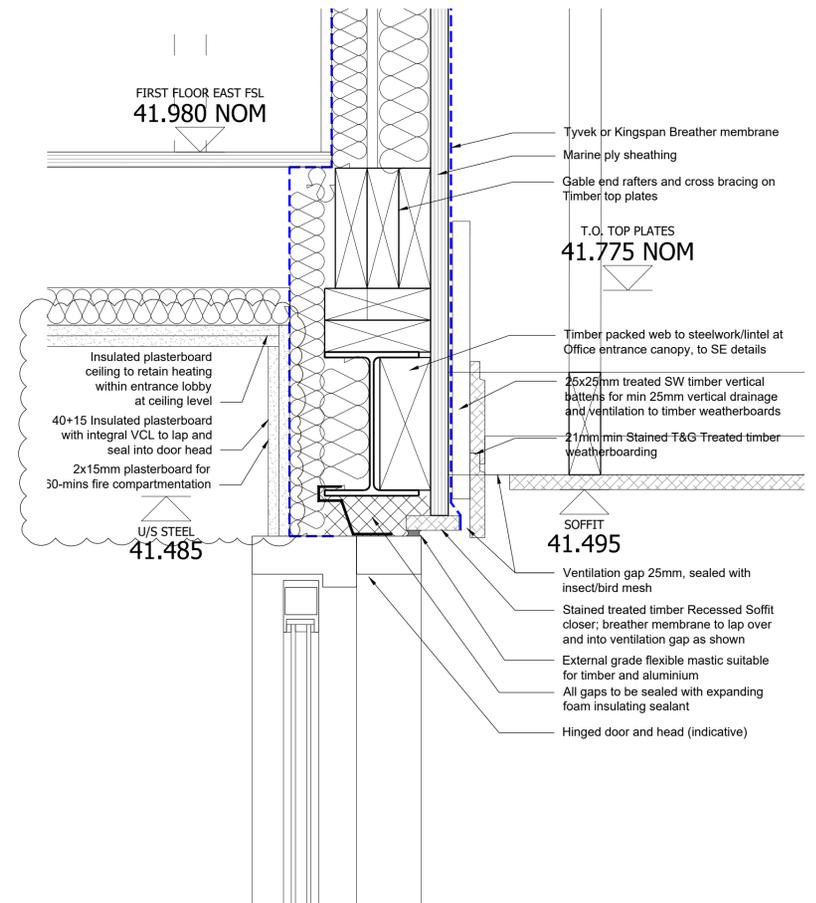

55 Entrance Canopy and Door Head Detail

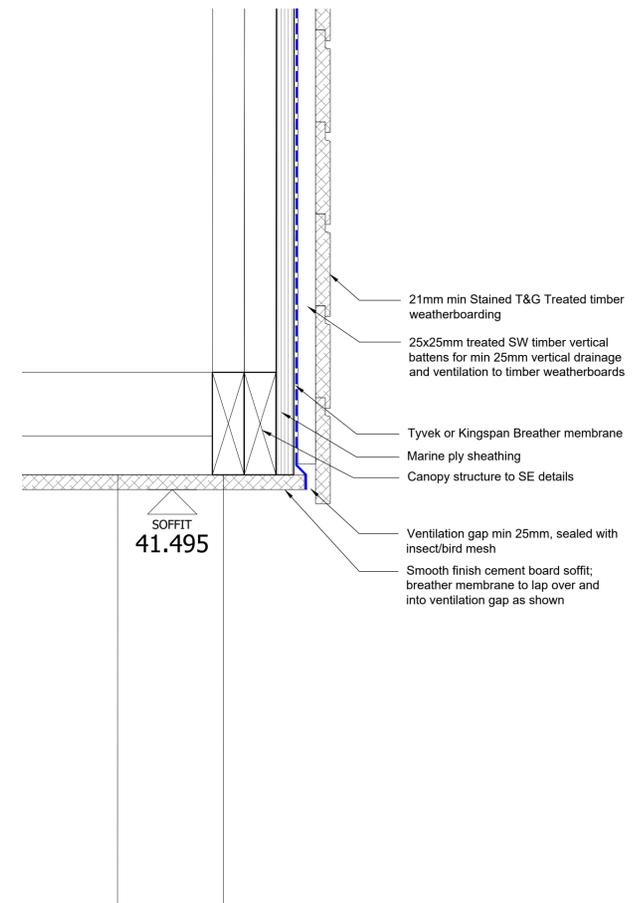

56 Entrance Canopy Bottom Detail



- DETAIL NOTES, ROOF TILES:**
- Tiles must be laid in a straight bond pattern
 - Tiles must be hung on their nibs
 - It is always advised that tiles are laid at mid shunt, although the precise roof details may require tiles to be laid more open or closed
 - When laid at mid shunt, tiles will have +/- 1.5 mm of shunt to provide laying flexibility
 - Eaves Comb must be used at all eaves situations
 - Dentil slips must be used for mortar bedded ridges and hips
 - Individual tiles can be nailed, clipped or nailed & clipped
 - Always refer to FixMaster for a BS 5534-compliant fixing specification
 - When clipping verges, both left-hand and right-hand perimeter tiles must be clipped

CROWTHER ASSOCIATES
 ARCHITECTS
 CROWTHER ASSOCIATES ARCHITECTS LLP
 PELHAM HOUSE
 25 PELHAM SQUARE
 BRIGHTON BN1 4ET
 T: 01273 695535
 www.crowtherassociates.co.uk

client
Wivelsfield Village Hall
 project
 Wivelsfield Village Hall
 Extensions
 drawing
 GENERAL ARRANGEMENT
 BUILDING DETAILS, SHEET 5
 DETAILS 51-56
 date scale drawn checked
 Apr 2019 1:50 @ A1 CAD GT
 status

TENDER

job no	dwg no	revision
C-1732 (30)005		T1