



BB1543-01-1700-SH-6001	1
Bar Schedule Ref	Sheet No

C01	C
Rev	Status

Project: Cross Keys Footbridge

Description: North Bankseat BBS


Job No: BB1543

Date Prepared: 31 Mar 23

Date Revised: 2 Jun 23

Prepared By: BKD Checked By: AK

Member	Bar mark	Type and size	No. of mbrs	No. of bars in each	Total no.	Length of each bar † mm	Shape code	A * mm	B * mm	C * mm	D * mm	E/R * mm	Rev letter
Bottom	101	B 16	2	11	22	1725	11	1050	700				
	102	B 16	1	11	11	4600	00	4600					
	103	B 16	1	32	32	2550	21	610	1370	610			
Side Bars	301	B 16	1	20	20	2350	11	1050	1330				
	302	B 16	1	8	8	4600	00	4600					
Top Bars	201	B 16	2	11	22	1725	11	1050	700				
	202	B 16	1	11	11	4600	00	4600					
	203	B 16	1	32	32	4425	99	805	300	1370	805		
Wall	401	B 16	1	32	32	2425	21	1100	270	1100			
	402	B 16	2	4	8	2225	13	1050	230	1050			
	403	B 16	2	4	8	4600	00	4600					

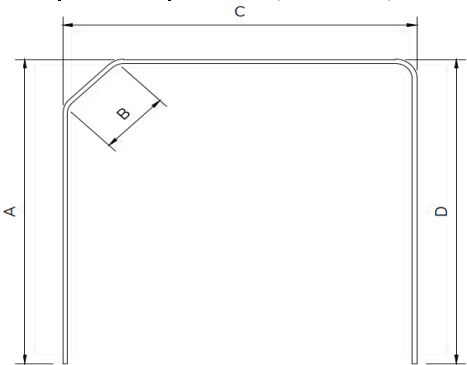



BB1543-01-SH-1700-6001	2
Bar Schedule Ref	Sheet No

C01	C
Rev	Status

Project: **Cross Keys Footbridge**

Description: **South Bankseat BBS**

Job No: **BB1543**

Date Prepared: **31 Mar 23**

Date Revised: **2 Jun 23**

Prepared By: **BKD** Checked By: **AK**

Member	Bar mark	Type and size	No. of mbrs	No. of bars in each	Total no.	Length of each bar † mm	Shape code	A * mm	B * mm	C * mm	D * mm	E/R * mm	Rev letter
Bottom	101	B 16	2	11	22	1725	11	1050	700				
	102	B 16	1	11	11	4600	00	4600					
	103	B 16	1	32	32	2550	21	610	1370	610			
Side Bars	301	B 16	1	20	20	2350	11	1050	1330				
	302	B 16	1	8	8	4600	00	4600					
Top Bars	201	B 16	2	11	22	1725	11	1050	700				
	202	B 16	1	11	11	4600	00	4600					
	203	B 16	1	32	32	4425	99	805	300	1370	805		
Wall	401	B 16	1	32	32	2425	21	1100	270	1100			
	402	B 16	2	4	8	2225	13	1050	230	1050			
	403	B 16	2	4	8	4600	00	4600					

