Ganton Close, Leeds Construction Details

Notes:

1) Figured dimensions to be taken. Do not scale dimensions. Contractors must verify all dimensions on site before preparing shop drawings or commencing any work.

2) Copyright ©. This drawing must not be reproduced without the permission of The Leeds Groundwork Trust

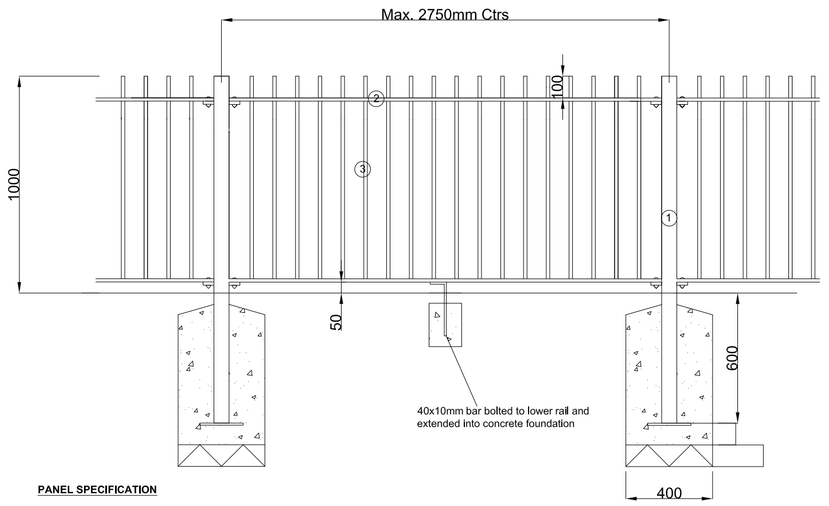

PANEL SPECIFICATION

1. INTERMEDIATE POSTS - 70x70x1600mm SHS Galv. 5mm Guage. 200x200x10mm base plate welded to bottom of post. Post set in gen 1 grade concrete foundations to dimensions shown. 60x40x12mm lugs drilled to receive 13mm sheradised security bolt and welded to post.
2. PANEL FRAME - 40x12mm RSF Galv.
3. VERTICAL BARS - 16mm Dia. galv. solid bars at 105mm ctrs

NOTES

All metalwork to be hot dipped galvanised to B.S. 1461 and polyester powder coated to colour ral 9005 (jet black)
No welding on site will be accepted
Metalwork to be stepped to follow site contours.
Workshop drawings to be approved by the landscape architect prior to fabrication

D06 01 Typical section of 1000mm High Vertical Bar Fencing

SINGLE LEAF PEDESTRIAN GATE WITH NO FINGER TRAPS.

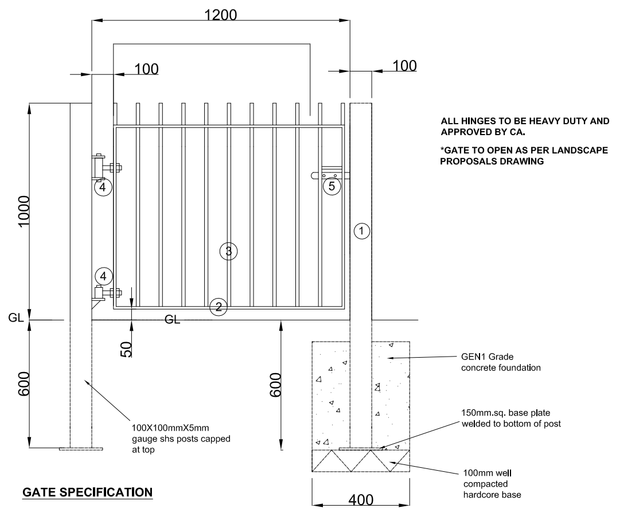

ALL HINGES TO BE HEAVY DUTY AND APPROVED BY CA.

*GATE TO OPEN AS PER LANDSCAPE PROPOSALS DRAWING

GATE SPECIFICATION

1. POSTS - 100x100x1600mm SHS galv. 5mm guage. 150x150x10mm base plate welded to bottom of post. Post set in gen 1 grade concrete foundations to dimensions shown. 60x40x12mm lugs drilled to receive 13mm sheradised security bolt and welded to post.
2. GATE FRAME - 40x12mm RSF galv.
3. BARS - 16mm Dia. galv. solid bars at 105mm ctrs
4. HEAVY DUTY HINGE . Hinge to be fabricated to avoid finger traps
5. LATCH & SLAM PLATE

NOTES

All metalwork to be hot dipped galvanised to B.S. 1461 and polyester powder coated to colour ral 9005 (jet black)
No welding on site will be accepted
Metalwork to be stepped to follow site contours.
Workshop drawings to be approved by the landscape architect prior to fabrication

D06 02 Typical section of 1000mm Pedestrian Gate

* All fencing to be stepped to follow contours

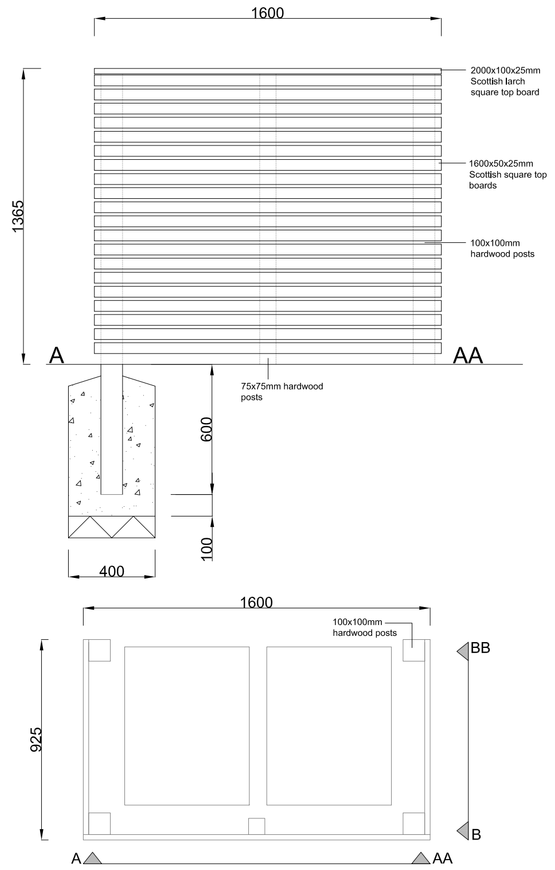

D06 03 Detail of timber bin stores

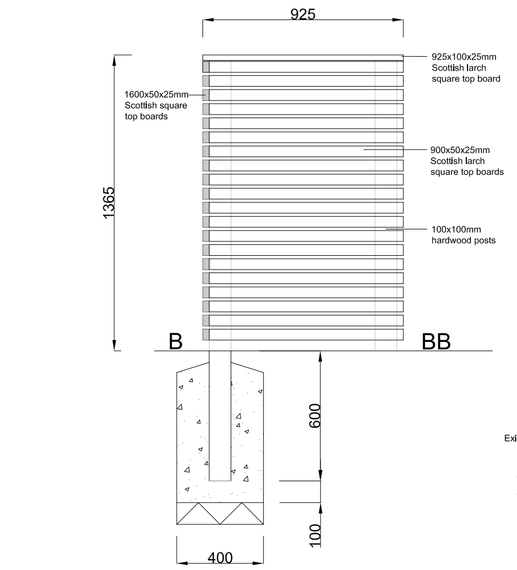

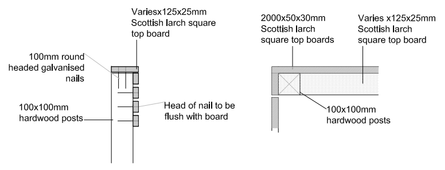

Close Boarding Attachment
(Plan view and cross section)

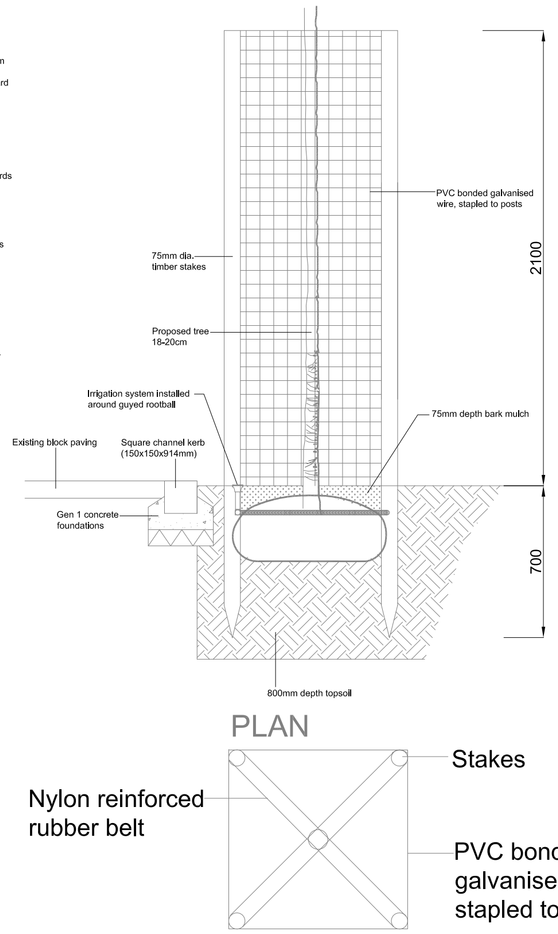

D06 04 Tree Pit/Guard Detail

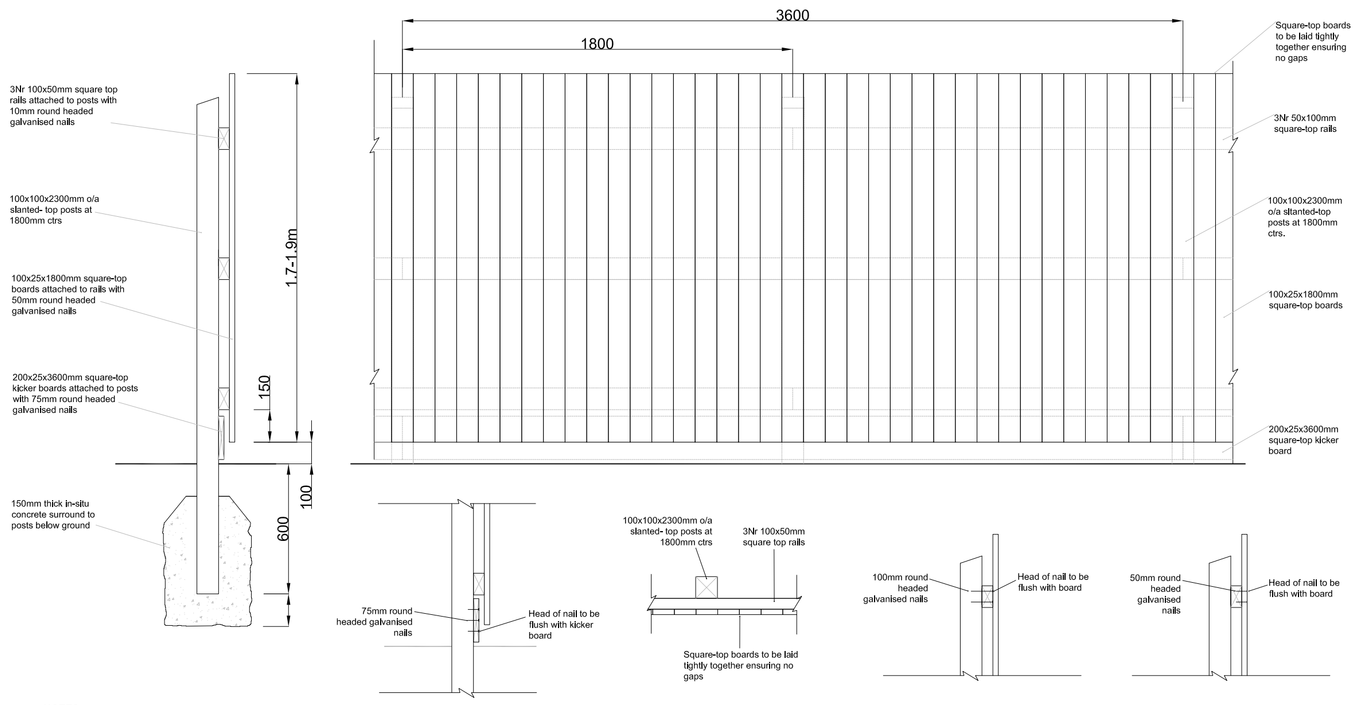

Kicker Board Attachment 1.8m Close Boarded Fence Rail Attachment Close Boarding Attachment

NOTES

Fencing to be raked to follow contours
Allow for sawing top of square boards to follow contours

D06 05 Details of 1.8/2m High TImber Fencing

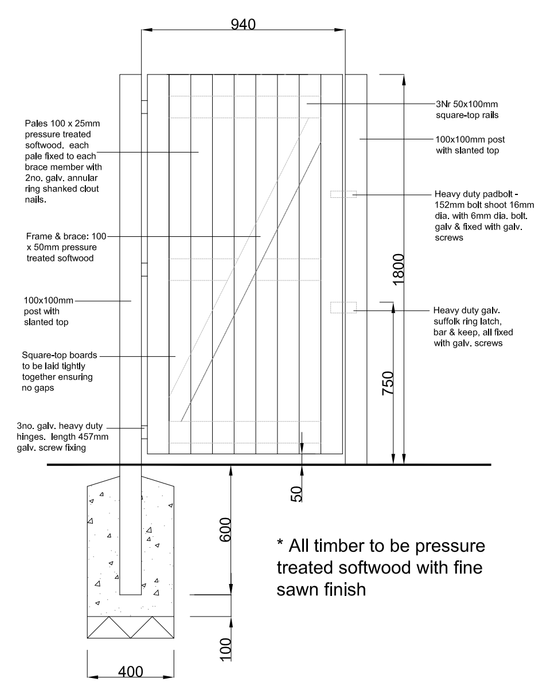

* All timber to be pressure treated softwood with fine sawn finish

D06 06 Typical detail of 1800mm High Timber Gate

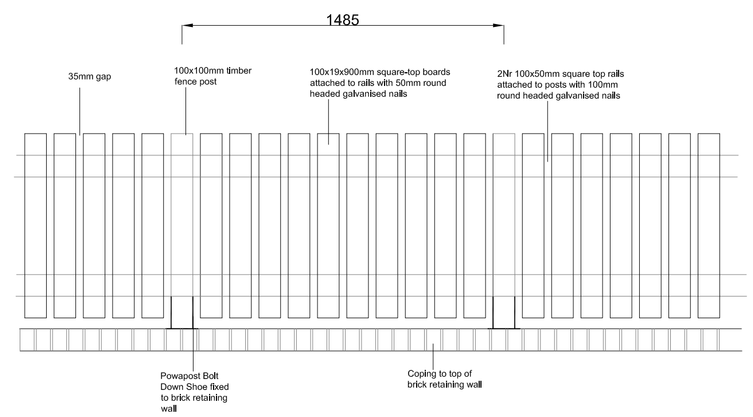

D06 07 Typical detail of 900mm High Timber Fence

GROUNDWORK
Groundwork Landscape Architecture
Environment and Business Centre,
Merlyn-Rees Avenue,
Morley, Leeds, LS27 9SL
Telephone: 0113 238 0601
Fax: 0113 252 5057
Web: www.landscapearchitecture-groundworkleeds.org.uk

Project	Title		
Ganton Close, Leeds	Fencing Details		
Client	Drawing No.	Date	Rev
Leeds Federated Housing Association	06	09-03-17	-
Site code	Drawn	Checked	Scale
LS6 2NF	MW	AM	1:20 @ A1