

National Asset Delivery
Technical Surveys and Testing
Site Information for 605746-003
A120 Parkestone Rbt
Pavement Coring Survey

1 SITE INFORMATION

1.1 Site boundary, extents and access arrangements

The following surveys are required:

- Coring and DCP

At the following location:

A120 Parkestone roundabout as shown in the works information and location plan Figure 01 below. All the work is within Highways England's boundary. Access to the site will be via the traffic management

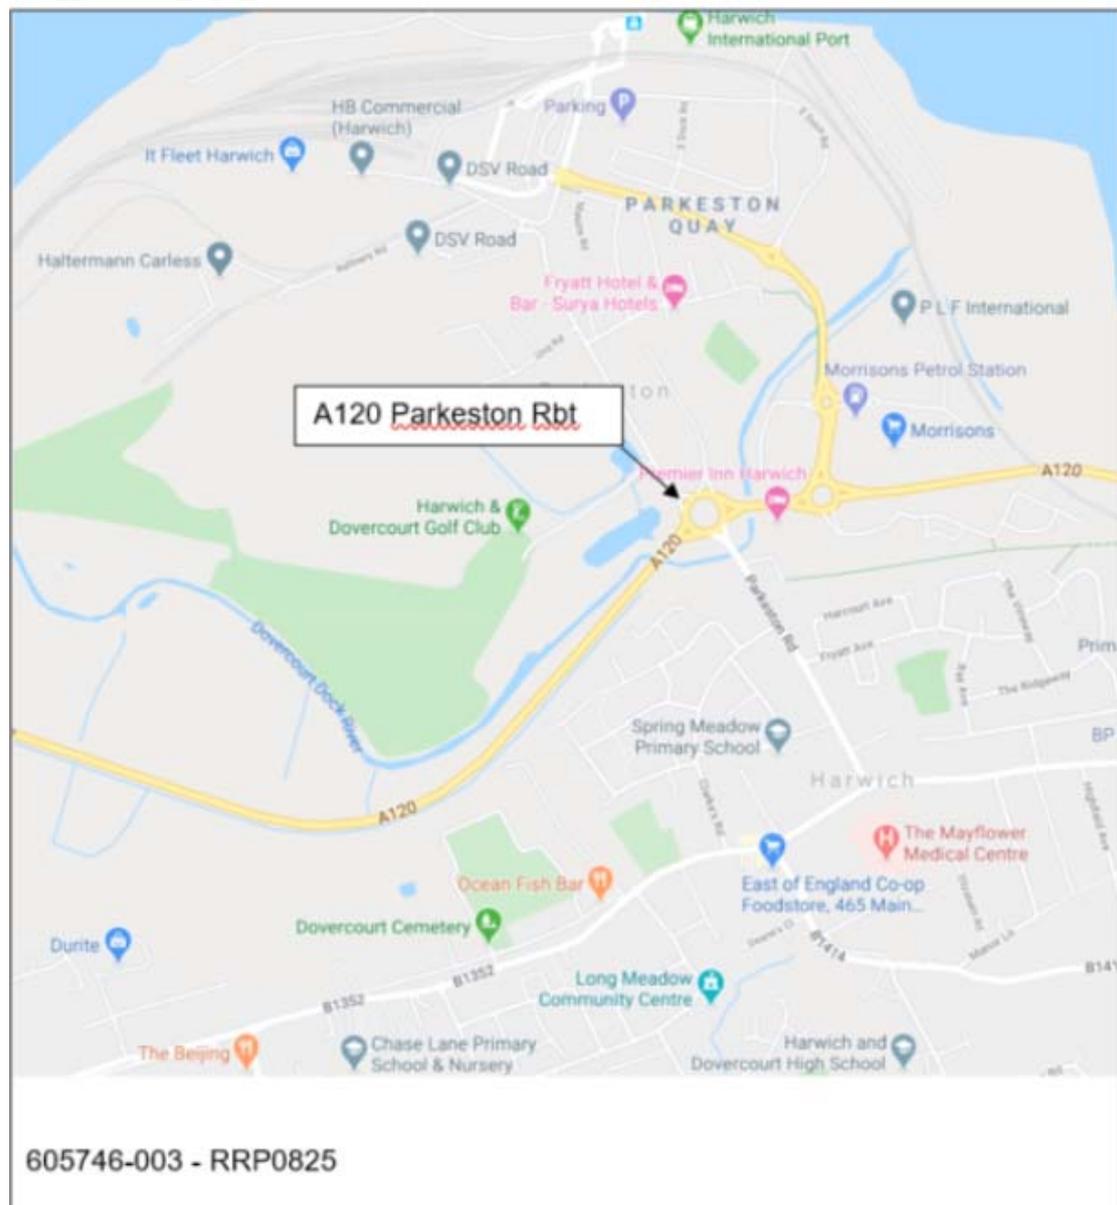


Figure 01: Location Plan

1.2 Pavement

- Carriageway construction is anticipated to be typical highway construction for trunk roads.

1.3 Drainage

- Standard highway drainage please refer to HADDMS.
- Pre - survey stats check shall be undertaken prior to works. It is anticipated however, that the survey work will not interfere with any drainage apparatus.

1.4 Geotechnical

- Works are confined to the carriageway

1.5 Soft Estate and Environment

- Not applicable.

1.6 Traffic Signs, Road Markings

- Existing signs and road markings present within scheme extents

1.7 Lighting

- A street lighting network is present within work areas

1.8 Structures and Buildings

- No structures in testing area, roundabout is at grade.

1.9 Tunnels

- Not Applicable

1.10 Technology

- A traffic light system and crossing exist on the eastern arm or the roundabout

1.11 Statutory Undertakers

- Utility apparatus are contained within the site; Utilities are to be located in the vicinity of any intrusive testing prior to commencement.

Works information and works scope documents provide a guide to the location of some services but this is not to be relied upon.

1.12 Traffic

- Estimated AADF 3,763 with 160 HGV traffic (DFT 2018)
- To provide a safe working area, traffic management will be provided by the employer through the Construction Works Framework. The carriageway will be controlled with Traffic Management during the course of the works. This is likely to be a full closure. The contractor is to liaise with the TM contractor to coordinate the programme of works and the appropriate required TM.

FOR INFORMATION ONLY
DO NOT COMPLETE AT THIS STAGE