

**National Asset Delivery**  
**Technical Surveys and Testing**  
**605748-001 A11 Junction 9a to A14**  
**Drainage Survey**  
**Site Information**

## 1 SITE INFORMATION

### 1.1 Site boundary, extents and access arrangements

The following surveys are required:

- Filter media survey

At the following location:

The A11 between Junction 9a and its junction with the A14 as shown in the works information and location plan Figure 01 below. All the work is within the highway boundary. Access to the site will be via the traffic management.

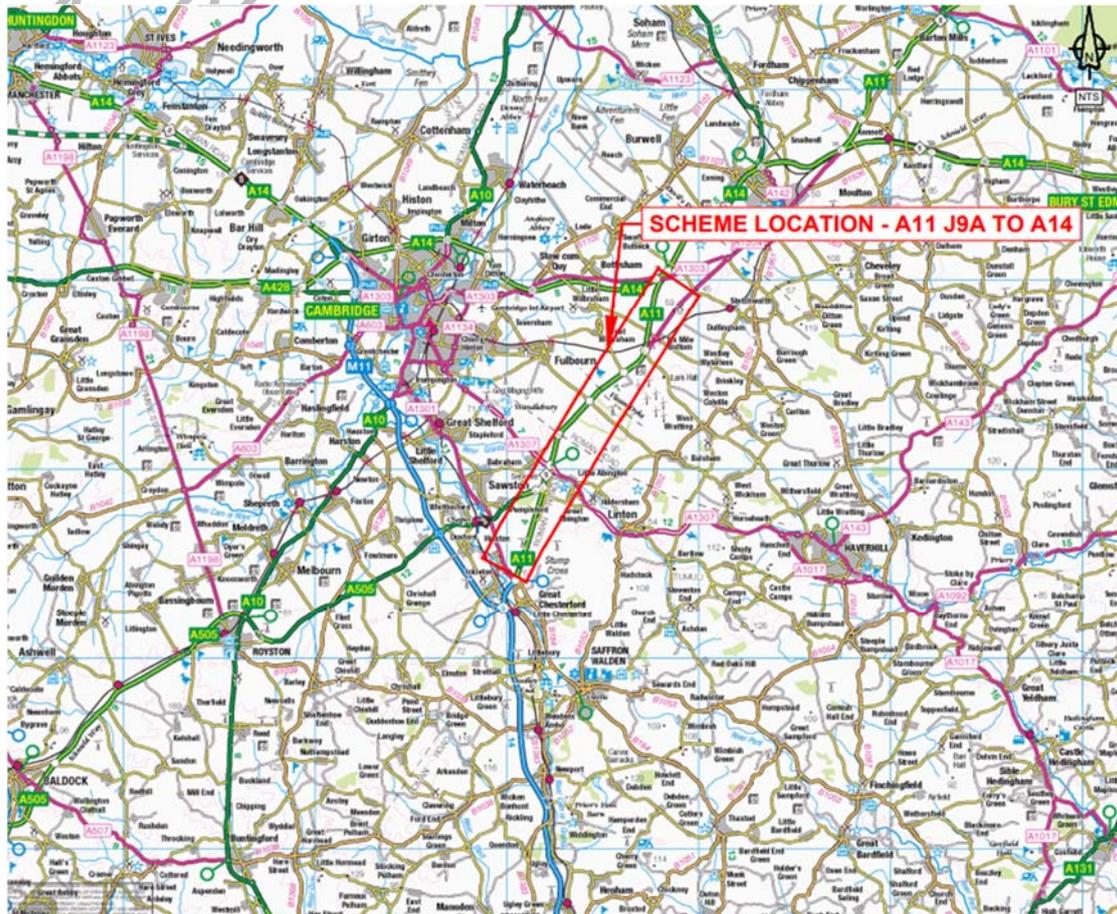


Figure 01: Location Plan

## 1.2 Pavement

- Carriageway construction is anticipated to be typical highway construction for trunk roads.

## 1.3 Drainage

- Standard highway drainage please refer to HADDMS.
- Pre-survey stats check shall be undertaken prior to works. It is anticipated however, that the survey work will not interfere with any utility apparatus.

## 1.4 Geotechnical

- Works are confined to the carriageway and footpaths

## 1.5 Soft Estate and Environment

- Typical highway verges and primarily rural and semi-rural landscape

## 1.6 Traffic Signs, Road Markings

- Existing signs and road markings present within scheme extents

## 1.7 Lighting

- A small street lighting network is present along parts of the survey route

## 1.8 Structures and Buildings

- There are overbridges along parts of the survey route.

## 1.9 Tunnels

- Not Applicable

## 1.10 Technology

1.11 There are likely to be inductive loops along the testing route. A visual inspection and location should be undertaken prior to commencement of works.

## 1.12 Statutory Undertakers

- Utility apparatus are likely to be contained within the site. Stats information is not available for this site.

### 1.13 Traffic

- Estimated AADF 47,315 with 3,118 HGV traffic (DFT 2019)
- To provide a safe working area, traffic management will be provided by the employer through the Construction Works Framework. The carriageway will be controlled with Traffic Management during the course of the works. This is likely to be a full closure and or lane closures. The contractor is to liaise with the TM contractor to coordinate the programme of works and the appropriate required TM.

FOR INFORMATION ONLY  
DO NOT COMPLETE AT THIS STAGE