


37 Anderson Crescent, Beeston

2016

PRELIMINARIES

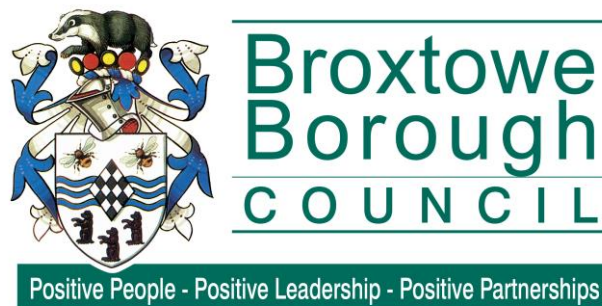

Directorate of Housing, Leisure & Property Services

Broxtowe Borough Council
Council Offices, Foster Avenue, Beeston, Nottingham NG9 1AB

STANDARD CONTRACT
PRELIMINARIES

PRELIMINARIES

DESCRIPTION OF THE WORK

Disabled adaptation to 37 Anderson Crescent to include creation of level access bathroom and bedroom in existing living room and provide ramping to front entrance.

LOCATION

37 Anderson Crescent, Beeston, Nottingham, NG9 2PS

CONTRACT PERIOD

To be agreed.

CONTRACT PARTICULARS

VAT	The works are VAT exempt
Retentions	5% retention to be held on all Interim Valuations. 2.5% retention to be held on Final Valuation and released at the end of the defects period.
Insurances	The contractor to hold current Public and Private Insurances to the value of £2,000,000.00. A copy of valid insurance documents will be required prior to commencement.
CDM	The project is not notifiable.
Defects Period	A defects period of 12 months for both building, mechanical and electrical works.

EMPLOYER

Broxtowe Borough Council

EMPLOYER REPRESENTATIVE

Projects Manager of Broxtowe Borough Council, Council Offices, Foster Avenue, Beeston, Nottingham, NG9 1AB.

STANDING ORDERS

All contracts will be conducted in accordance with the Councils Standing Orders, copies of which may be obtained from the council. Particular attention is drawn to the conditions of contract and the prevention of corruption.

CHECKING/SITE VISIT

On receipt of Tender Documents the contractors must ensure that all the information necessary for preparing a tender has been provided. All additional information must be requested in writing. You are also recommended to visit the proposed site.

SAFETY AND CONVENIENCE OF THE PUBLIC

The safety of the public in the vicinity of the works must be considered at all times. Prior to works commencing on site a detailed programme of works to be agreed

The contractor to clean and clear away rubbish from the working area at the end of each working day. Rubbish shall not be allowed to accumulate in or around the site.

EXISTING SERVICES

The contractor to ensure no disruption occurs to the existing services during the works.

TEMPORARY SCREENS

The contractor to allow to effectively screen off the area of works to prevent trespass by members of the public and to contain dust and debris within the confines of the site.

DATA PROTECTION ACT 1998 (C29)

The contractors hereby undertakes that he and his employees and agents will treat as confidential and will not hold or publish in any form any personal data, as defined by the Data Protection Act 1998 which they become aware of during the execution of this contract and will not pass on such data to any other person or body.

The contractor further undertakes that he will indemnify the Employer against all liability under the Act arising from the failure of the contractor or his employees or agents to comply with this undertaking.

PREVENTION OF TRESPASS

No workman is to trespass upon the adjoining premises. If the execution of work requires that workmen must enter upon adjoining areas, the contractor must first obtain the necessary permission. The contractor shall insure against and indemnify the Employer against any claim or action for damage on action of any trespass or their misconduct or his employees.

NORMAL WORKING HOURS

The normal working hours will be between the hours of 8.00 am. and 6.00 pm. However, to assist with the smooth running of the contract, arrangements may be made between the Contractor and the tenant to extend these hours.

PARKING

The contractor will be responsible to supervise during the contact period, the parking of all site operatives' private cars including any sub contractors either within the confines of the site.

STORAGE

The contractor must make provision for all storage requirements and its security.

DRAWINGS/SKETCHES

The contractor will be responsible for checking dimensions prior to ordering any components. No claim will be entertained for any additional costs arising from failure to detect dimensional or similar discrepancies which could have been found by physically checking.

The contractors shall notify the supervising officer immediately of the discovery of any service pipes, ducts, cables etc, not shown on the drawing and he shall obtain instructions before removing, altering or adapting the same.

QUALITY & SUPERVISION

The contractor shall allow in his tender for a foreman/supervisor who will be in attendance at all times. This person can be a working foreman/supervisor.

The foreman/supervisors role shall consist of:-

1. Arranging access and notifying the CA of the proposed date for starting each element of the works.
2. Keep the CA informed of any amendments to the programme.
3. Liase with all trade foremen, including nominated subcontractors, to ensure coordination of the works.
4. List all snagging defects and issue to his operative ensuring that all snagging works are carried out as specified.
5. Agree variations with the client for unforeseen works.
6. Carry out joint inspections with the CA.
7. Measuring and ordering materials ensuring that they arrive on site in time for fixing.
8. Maintaining material stock levels.
9. The foreman/supervisor shall carry some form of communication for the duration of the contract.
10. Any other duties to ensure the smooth running of the contract.

Should any components or materials specified not be available or sufficient quantities not likely to be available the contractor must not substitute components or materials other than specified without obtaining the supervising officers prior written instruction.

TIME AND PROGRESS SCHEDULE

Within two weeks of the Contract Administrator's instructions to proceed, the contractor shall prepare and provide the Contract Administrator with four copies of a detailed programme of work clearly showing the proposed method of working. The contractor must also ensure that all suppliers etc. are fully aware of the programme to ensure deliveries etc. of materials are in accordance with the programme.

SCOPE OF THE CONTRACT

Prior to tendering the contractor must ensure that he is fully conversant with the terms and conditions of the contract and the works as described in the Schedule of Works. Should the contractor intending to submit a tender have any queries concerning the quantity of work or conditions of the contract they should consult the Contract Administrator and discuss the subject prior to tendering. No claim for extra payment based on lack of knowledge or misunderstanding will be paid.

LABOUR RESOURCES

It is the responsibility of the contractor to ensure adequate tradesmen in each trade as available to ensure that all works issued by the employer can be carried out within the targets set. All persons employed must be qualified in the trade for which he or she is employed. The employer reserves the right to request that an operative who in his opinion is unsuitable is removed from the site.

SUB-CONTRACTING

The contractor shall not sub contract the works or any part thereof without written consent of the employer. Should approval be given the persons employed will automatically accept all conditions of this contract.

PLANT AND MATERIALS

The Contractor shall provide and pay the cost incurred in the supply of labour and plant together with attendance of specialised personnel in maintaining such plant. The employers' safety officer may inspect the equipment from time to time.

SCAFFOLDING

Whenever scaffolding is required the cost will be included within the price submitted. Scaffolds must comply with BS EN 12811-1:2003 and shall be erected by a competent person. The employers' safety officer will make interim visits to ensure compliance.

DRESS AND IDENTIFICATION

The contractor shall ensure that all persons carrying out the work shall at all times be properly attired and presentable. The contract's attention is particularly drawn to Health and Safety Regulations.

LIGHTING, GAS, POWER AND WATER

The contractor shall include for the provision of all necessary materials, tools, plant, labour, transportation, supervision, temporary works and support, water, lighting, power, access equipment, lifting equipment, signage, security, site storage, barriers, fencing or any other item required for the installation in connection with the works, and their work people employed in the work. .

GUARANTEES

The contractor is required to ensure that where guarantees are given for materials supplied or work done, such guarantees are to be transferred to, and vested in the possession of the Employer as soon as the material is supplied or the works completed.

DEFECTS

All non-urgent defects/snagging, which has been identified by the supervising officer, shall be completed within 5 working days. Any defects/snagging, which the supervising officer deems to be urgent, shall be completed within 24 hours.

EMERGENCY CONTACT

The contractor will be required to provide the client with an emergency contact. This will be the telephone number of an employee, or other representative of the contractor, who will respond to emergencies should the need arise. The contact will be required 24 hours a day, including weekends and holiday periods. Failure to respond may result in the Council appointing another contractor to rectify the defect and recover the cost from the original contractor as a debt.

DEFECTS LIABILITY PERIOD

Any defects, which occur during the defects liability period, must be dealt with within twenty-four hours of notification unless otherwise agreed. Failure to respond may result in the Council appointing another contractor to rectify the defect and recover the cost from the original contractor as a debt.

FINANCE ACT & REGULATIONS

The contractor shall provide evidence to satisfy the Employer that he is a limited company or holds a Certificate of Exemption for the Inland Revenue to comply with the provisions of sections 29 to 31 of the Finance Act 2004. All business will be conducted in line with current finance regulations.

DAMAGE TO THE HIGHWAY ETC.

The contractor shall make good any damage caused to roadways, kerbs, verges or pavements and the like and they shall jointly with the Council's Supervising Officer inspect the roadway in the area of his storage facility to note any pre-existing damage. Any additional damage found on completion shall be deemed to be the Contractor's responsibility. Skips shall not be allowed to be left on the highway except in complete conformity with the requirements of the Highway Authority and shall not be permitted elsewhere without prior approval. Particular attention is required to lighting of skips after dark.

SECURITY

All plant is to be securely locked when personnel are not on site. Proper and adequate precautions are to be taken for safety and protection of the public at all times, providing any necessary screens, barriers etc. Particular attention must be paid to security during Bank Holiday periods.

CONTRACTOR'S DETAILS

The successful tenderer is to provide names and telephone numbers of staff both on and off the site and in addition a telephone number of a member of staff who is able to deal with an emergency out of normal working hours.

PRIOR TO WORK COMMENCING

1. The contractor shall prior to work commencing:
 - a) Comply with and give all notices required by any Act or Parliament any instrument rule or Order made under Act of Parliament, and regulation or Bye-law of the Authority or any statutory undertaker which has any jurisdiction with regard to the Works or with those systems the same are or will be connected.
 - b) Appoint a trained Safety Supervisor.
 - c) Notify the Authority's Representative in writing of the person so appointed.
 - d) Cause such Safety Supervisor to properly carry out or cause to be carried out these General Requirements.

HEALTH AND SAFETY

Contractors must ensure that they and their employees meet the requirements of all current Health and Safety requirements. This extends to monitoring the subcontractors.

Health and Safety at Work

General Requirements

The Contractor shall comply, and so far as is reasonably practical, shall ensure that his employees comply with the provisions of the Health and Safety at Work Act 1974, the Factories Act 1961, The Construction (General) Provision Regulations 1961, the Offices, Shops and Railway Premises Act 1963, The CDM Regulations 2007, and any subsequent statutory amendments or alterations made to these Acts.

In addition the Contractor shall ensure the works are carried out in accordance with all orders and regulations made thereunder and with any approved Code of Practice, Guidance Notes, Acts of Parliament, Orders, regulations and Bye-laws which are applicable.

It shall be the Contractor's duty to ensure so far as is reasonably practical, that neither his employees, members of the public, nor anyone else who may be affected thereby are not exposed to risks to their health or safety.

The Contractor shall provide the Authority with the names of all Sub-contractors, and the latter shall properly carry out these General Requirements.

The Contractor shall comply with the arrangements for the time being in force for reporting to the Health & Safety Executive with a copy to the Authority, all incidents that occur during the works relative to:

- a. lost time accidents;
- b. fatalities and major injuries
- c. dangerous occurrences of specified kinds;
- d. illness known to be associated with the works

Where work necessitates the use of naked flames in roof and similar confined spaces a suitable portable fire extinguisher shall be readily available. No welding or similar operations shall be executed until all surrounding inflammable materials have been removed or adequately protected.

All flammable rubbish shall be disposed of quickly and not to be allowed to accumulate on site.

HAZARDOUS AND SPECIAL WASTE (INCLUDING ASBESTOS)

If during any part of the works waste or hazardous waste is discovered, it must be reported to the contract supervisor immediately. Any subsequent remedial work will be completed in strict accordance with current legislation. The Council has conducted a recent asbestos survey, a copy of which is attached.

FIRE PRECAUTIONS

- i. The contractor shall take all reasonable precautions to avoid the outbreak of fire on the site of the works and in adjacent buildings and he shall draw the attention of all workmen to the dangers involved in the careless disposal of matches, cigarettes and combustible materials.
- ii. Where work necessitates the use of naked flames in roofs and similar confined spaces a suitable portable fire extinguisher shall be readily available. No welding or similar operations shall be executed until all surrounding inflammable materials have been removed or adequately protected.
- iii. All inflammable rubbish shall be disposed of quickly and not to be allowed to accumulate on site.
- iv. The use of asphalt boilers and similar containers shall not be allowed on combustible roofs and floors.

PROTECTION OF PUBLIC PROPERTY

Maintenance and protection of public property of the Public Utility Service Companies and the making good of, or paying for any damage thereto will be the responsibility of the contractor. See also particular conditions relating to highways above.

INSURANCES

See contract particulars

PRELIMINARY PRICING IN RESPECT OF PROVISIONAL SUMS

In pricing items of a preliminary or similar nature (except those dealt with the inclusion in schedule of rates or by percentage addition) the contractor shall make due allowance for the additional cost of such items arising from the execution of the work for which provisional sums are included elsewhere in this specification.

CONTINGENCY SUMS

Any included contingency sums will be expended at the sole discretion of the contract administrator.

RECEIPTED INVOICES

The contractor shall produce receipted invoices from named sub contractors and suppliers for inspection at the supervising officers office as and when required as in the absence of receipted accounts produce satisfactory evidence of payment having been made.

SMOKE DETECTION/SPEECH CALL FACILITY

Where these are installed the contractor must provide suitable protection to reduce the risk of false activation and damage. The system must be tested at the end of each working day in order to ensure the equipment remains operable when work is not being carried out.

HOLIDAY PERIODS

The Council has no set periods of annual holidays except for Bank Holidays. Therefore, traditional building trade holidays which amount to total close downs will not be accepted.

PROTECTION OF EXISTING ADJOINING AREAS ETC

The Contractor must protect existing and adjoining areas and protect against injury to the public and also against undermining stability of any building or structure. The Contractor will be held responsible for any injury of damage.

The Contractor shall at all time pay due regard to the safety of the general public and effect Employers and Public Liability Insurance Policies.

PROTECTING THE WORKS FROM INCLEMENT WEATHER

The Contractor shall carry out all temporary works and measures or take precautions necessary to protect the buildings and contents and site generally from injury by inclement weather; including all tarpaulins, temporary roofing, coverings, temporary chutes, spoutings, gutters, downpipes, drains, grips, ditches, etc required to carry off surface water and for all coverings, screens, heating etc, required to protect any work or materials liable to be damaged by frost; include also for all precautions necessary to prevent damage to any part of the building, fitting etc, by high winds or by excessive humidity or changes in humidity. The Contractor will be held entirely responsible for the adequacy of the protection afforded against damage by inclement weather and for making good any such damage to his own expense.

PROTECTION OF THE WORKS

The Contractor shall at his own expense protect the property against damage or theft including lighting for security and for protection of the public. In areas vulnerable to vandalism and protective work carried out by the Contractor will be offered to the Employer for the duration of the void period, the cost of removing the work will be carried out in accordance with the day rate.

PROTECTION OF PUBLIC AND PRIVATE SERVICES

The Contractor is responsible for the protection and shall uphold and maintain all pipes, sewers, service mains, overhead cables etc, during the works. The Contractor shall make good any damage due to any cause within his control at his own expense or pay any costs and charges in connection with reinstatement.

DRYING OUT

The Contractor shall allow for the cost of providing and maintaining heat in the building as becomes necessary for adhering to his work schedule, drying out, protecting joinery, plaster and all other work likely to be affected by humidity or low temperatures.

SITE MEETINGS

If and when required, the Contractor shall arrange and meet all expenses for site meetings as necessary and ensure attendance of any subcontractors.

In the event of any conflict between these conditions and the condition of contract these conditions shall prevail.