


TASK NO.	TASK/DESCRIPTION	NOTES
	L1 ELECTRICAL	
L1.04	<p data-bbox="408 392 699 421">Quarterdeck Lighting</p>  <p data-bbox="408 842 1214 954">Quarterdeck lighting is not fit for purpose. RENEW with controllable (on/off) LED strip lighting minimum IP65 rating. Lighting to be minimum of 3m clear of access door opening due to flashover from exercise munitions.</p>	<p data-bbox="1251 392 1409 450">Minimum IP 65 rating.</p>

TASK NO.	TASK/DESCRIPTION	NOTES
L1.05	<p data-bbox="400 421 767 454">3FA2 Range Store Lighting</p>  <p data-bbox="400 1211 1214 1323">3FA2 Range Store currently has no dedicated lighting (temporary lighting necklace in place). Contractor to supply and INSTALL 3 in number LED strip lights with on/off switch in vicinity of compartment entrance.</p>	

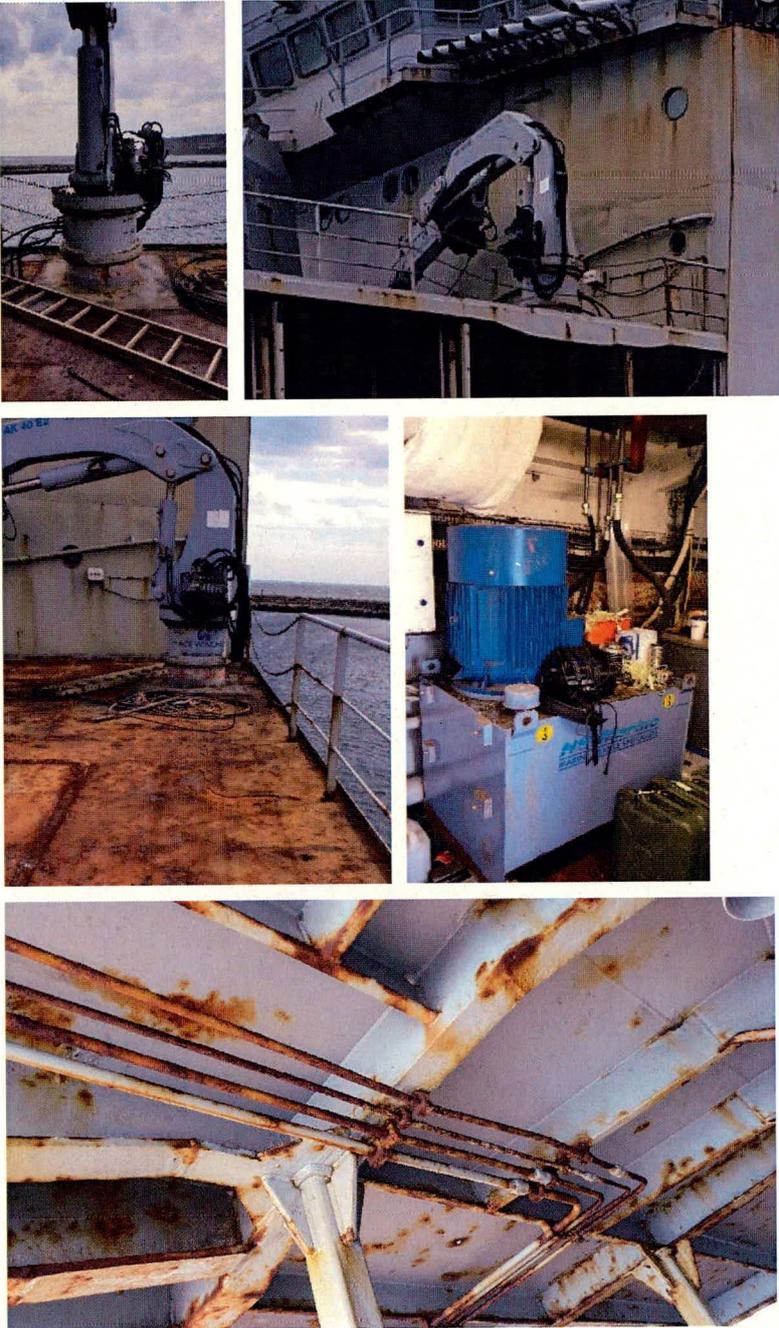

TASK NO.	TASK/DESCRIPTION	NOTES
M1.01	<p data-bbox="411 389 1123 427">Hydraulically Operated Crane Port Side Vehicle Deck</p>  <p data-bbox="416 1785 1257 1926">This crane was originally fitted for RIB lifting operations for which there is no longer a requirement. The winch and its associated powerpack and pipework is to be removed. The contractor is responsible for disposal. Any deck or bulkhead penetrations resulting from the removal are to be sealed with welded blanks to maintain watertight integrity.</p>	<p data-bbox="1251 389 1453 562">Hot work Required – Appropriate precautions to be taken in accordance with General 8.4.</p> <p data-bbox="1251 591 1453 678">To be completed in conjunction with H2.19.</p>