


TASK NO.	TASK/DESCRIPTION	NOTES
H2.06	<p data-bbox="443 327 1145 383"><b>H2 HULL AND STRUCTURE – EXTERNAL DECKS AND ASSOCIATED FITTINGS</b></p> <p data-bbox="395 416 571 450"><b>Hawse Pipes</b></p>  <p data-bbox="395 1088 1145 1122">There is evidence of pitting within the port and stbd hawse pipes.</p> <p data-bbox="395 1149 1217 1290">Abrade back and NDE to determine remaining wall thickness. To be at least 2/3 original thickness in areas in contact with chain or anchor, else 4mm is adequate to retain watertight integrity (original fitted thickness may be estimated based on thickness measurement of uncorroded area). REPRESENTATION on completion.</p> <p data-bbox="395 1323 834 1357">ALLOW for 15m<sup>2</sup> REPRESENTATION.</p>	<p data-bbox="1249 416 1353 472">NDE Required</p> <p data-bbox="1249 506 1401 640">IAW Paint scheme - General 12 and Annex B refer.</p>

TASK NO.	TASK/DESCRIPTION	NOTES
H2.07	<p data-bbox="395 322 1142 376">H2 HULL AND STRUCTURE – EXTERNAL DECKS AND ASSOCIATED FITTINGS</p> <p data-bbox="395 412 625 443"><b>Hawse Pipe Grill</b></p>  <p data-bbox="395 994 1214 1146">The stbd hawse pipe grill has cut-out for cable however cable not fitted on stbd side leaving unnecessary opening on deck. Existing grill to be RENEWED with one that covers entire hawse pipe opening. REPRESENTATIVE securing brackets on completion. ALLOW for 2m<sup>2</sup> REPRESENTATION.</p>	<p data-bbox="1246 412 1450 577">Hotwork Required – Appropriate precautions to be taken iaw General 8.4.</p> <p data-bbox="1246 636 1406 721">To be done in conjunction with H2.06.</p> <p data-bbox="1246 748 1430 864">IAW Paint scheme - General 12 and Annex B refer.</p>

TASK NO.	TASK/DESCRIPTION	NOTES
H2.08	<p data-bbox="443 331 1149 383">H2 HULL AND STRUCTURE – EXTERNAL DECKS AND ASSOCIATED FITTINGS</p> <p data-bbox="408 416 692 450"><b>Foremast Wire Stays</b></p> <div data-bbox="408 465 1166 1030">  </div> <p data-bbox="408 1048 1212 1131">The 3 in number foremast cable stays are showing galvanising breakdown and corrosion. RENEW 3 in number cable stays and REPRESENT anchor points.</p> <p data-bbox="408 1144 837 1176">ALLOW for 3m<sup>2</sup> REPRESENTATION.</p>	<p data-bbox="1251 421 1417 562">IAW Paint scheme - General 12 and Annex B refer.</p>

TASK NO.	TASK/DESCRIPTION	NOTES
H2	HULL AND STRUCTURE – EXTERNAL DECKS AND ASSOCIATED FITTINGS	
H2.09	<p><b>Redundant Fire Hydrants</b></p>  <p>All fire hydrants now redundant, pipework heavily corroded with no paint coatings remaining and with wall thickness severely reduced. REMOVE hydrants (x5) and weld blanks in place to cover deck penetrations. REPRESENT on completion.</p> <p>ALLOW for 5m<sup>2</sup> REPRESENTATION.</p>	<p>Hotwork Required – Appropriate precautions to be taken iaw General 8.4.</p> <p>IAW Paint scheme -General 12 and Annex B refer.</p>

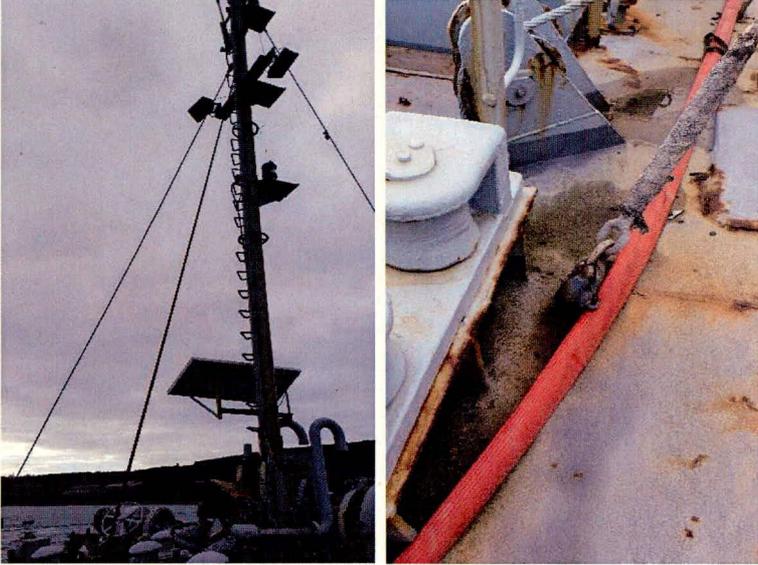