


To provide drainage works to Asher Recreation Ground

- Remove all play equipment and bases and cart away from site
- Supply and install 2000m of 100mm perforated lateral drainpipe at 550mm deep at 4m intervals, backfilled with gravel to within 100mm of the surface and topped off with rootzone topsoil
- Supply and install 140m of 160mm perforated carrier drainpipe at 500mm deep, backfilled with gravel to within 100mm of the surface and topped off with rootzone topsoil
- Supply and install the appropriate number of junctions
- Supply and install one collection chamber 600mm x 600mm at 1m deep with cover and frame which in turn connects to existing drainage pipework
- Supply and install 12m outfall 160mm twinwall pipe for outlet from chamber
- Remove all excavated soil from site
- Re-seed site as necessary
- Reinststate any damage to leave site in tidy condition

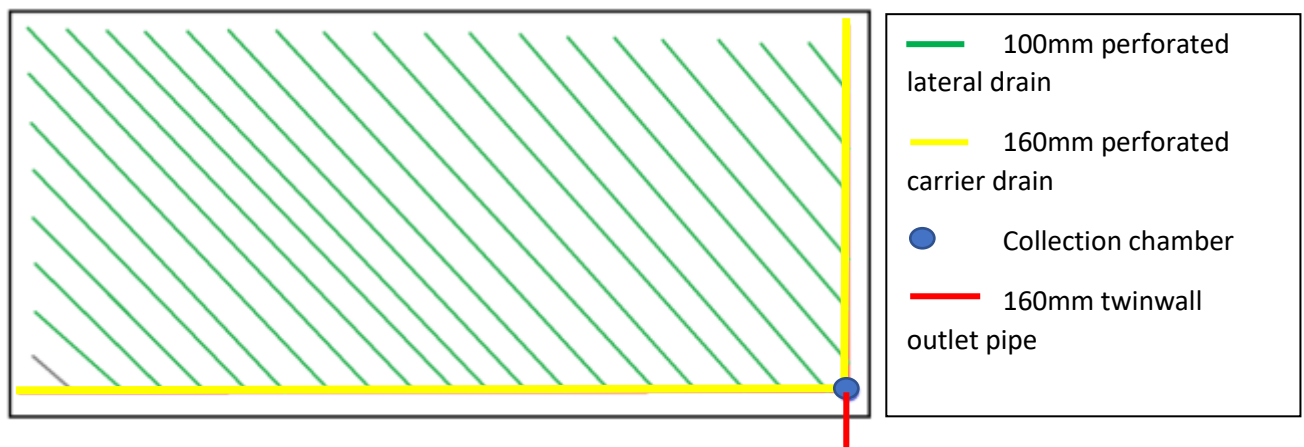

Indicative drawing, not to scale.

- In addition, please provide separate cost to install appropriate meterage of secondary drainage in the form of sand slitting at 75mm wide and 300mm deep every 2m, backfilled with gravel to within 100mm of the surface and topped off with rootzone topsoil.