




rev	date	amendment	dwn	chkd
A	07.06.19	Roof tiles updated to Bold Roll shape. Plinth bricks changed to regular.	cad	gt
B	20.07.19	60-min fire compartmentation added; stairs updated	CAD	GT

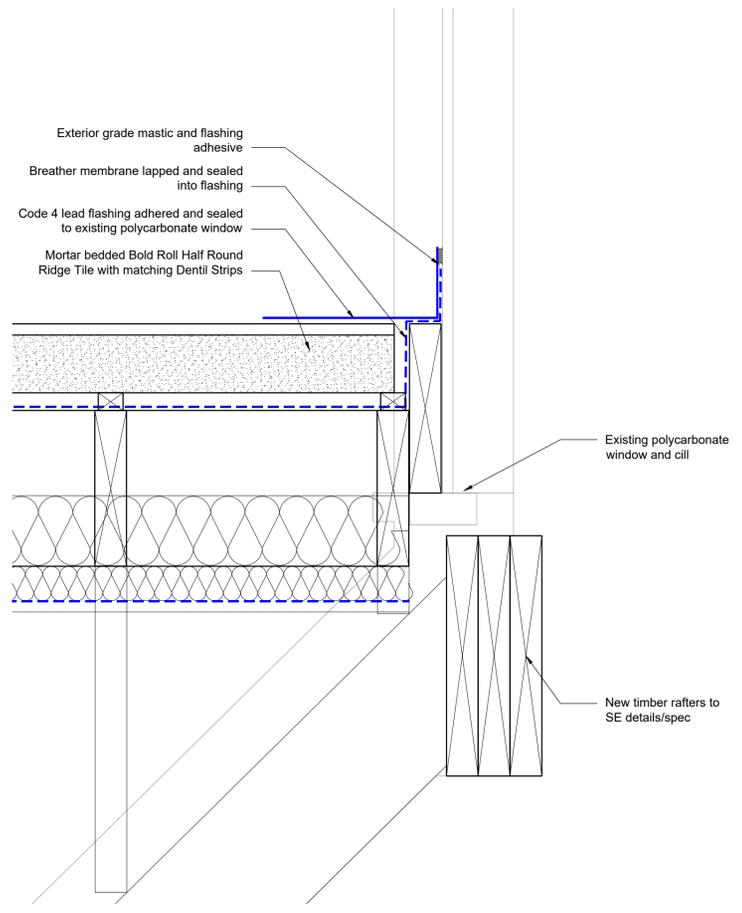


21 Ridge connection at existing window cill

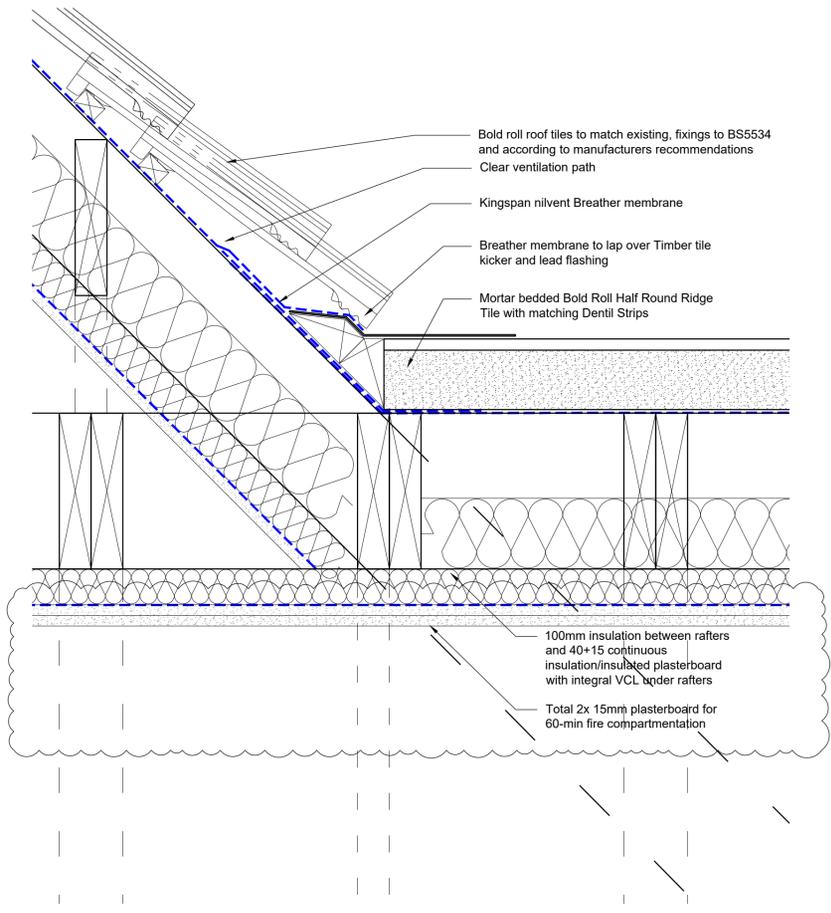


22 Verge and Ridge connection above double-height space

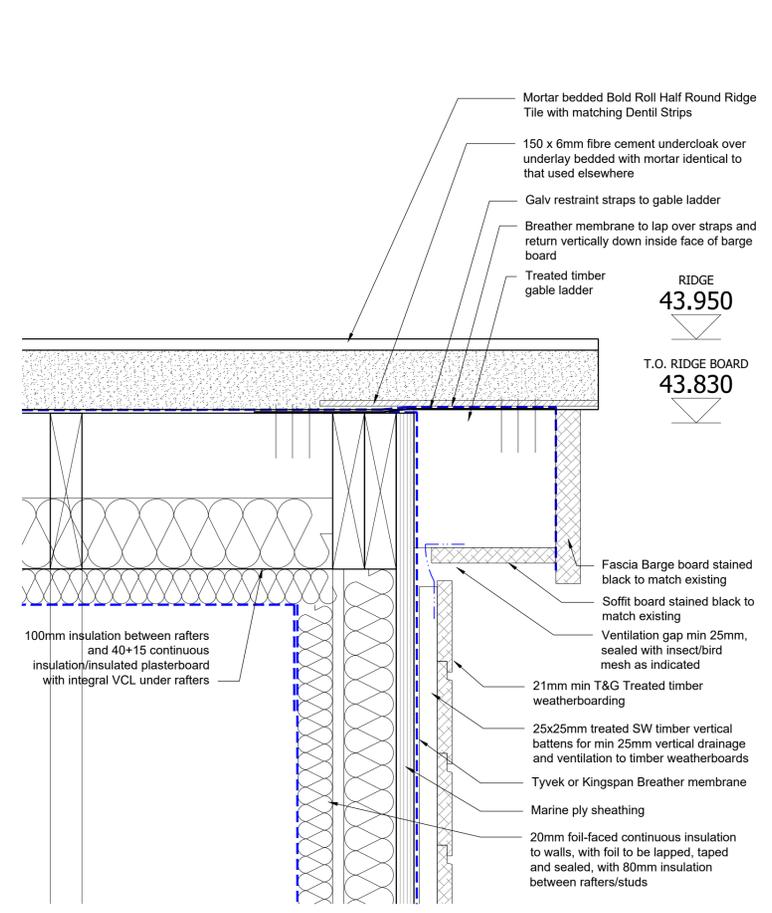


23 Ridge at gable end above entrance

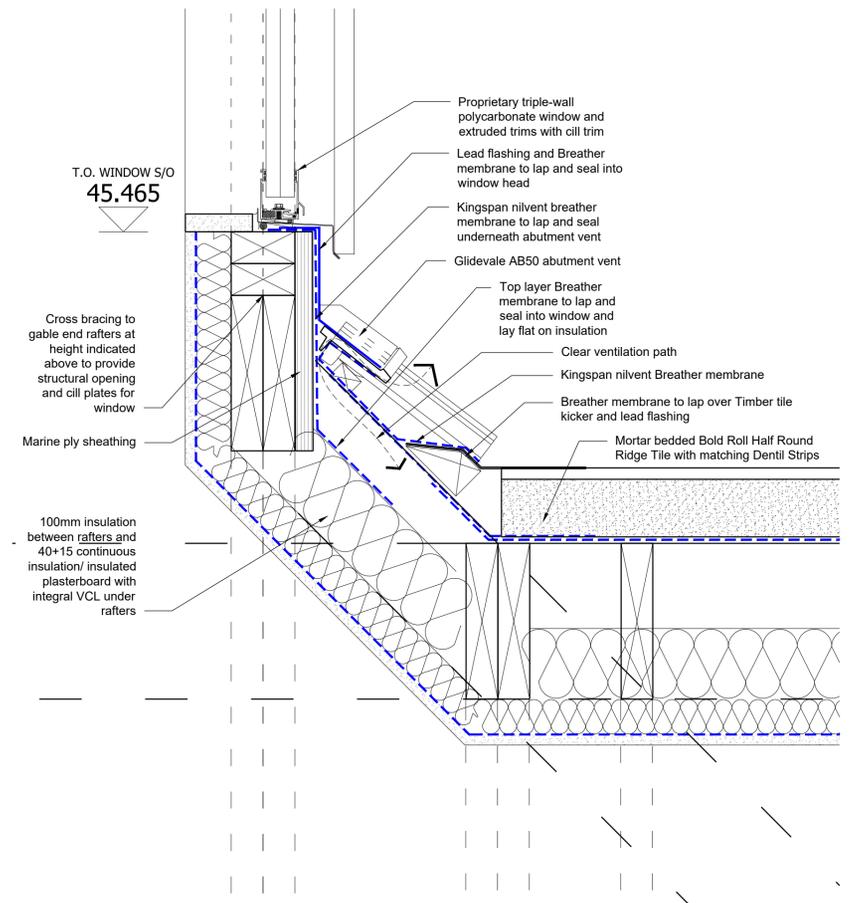

24 Verge and Ridge connection at window cill

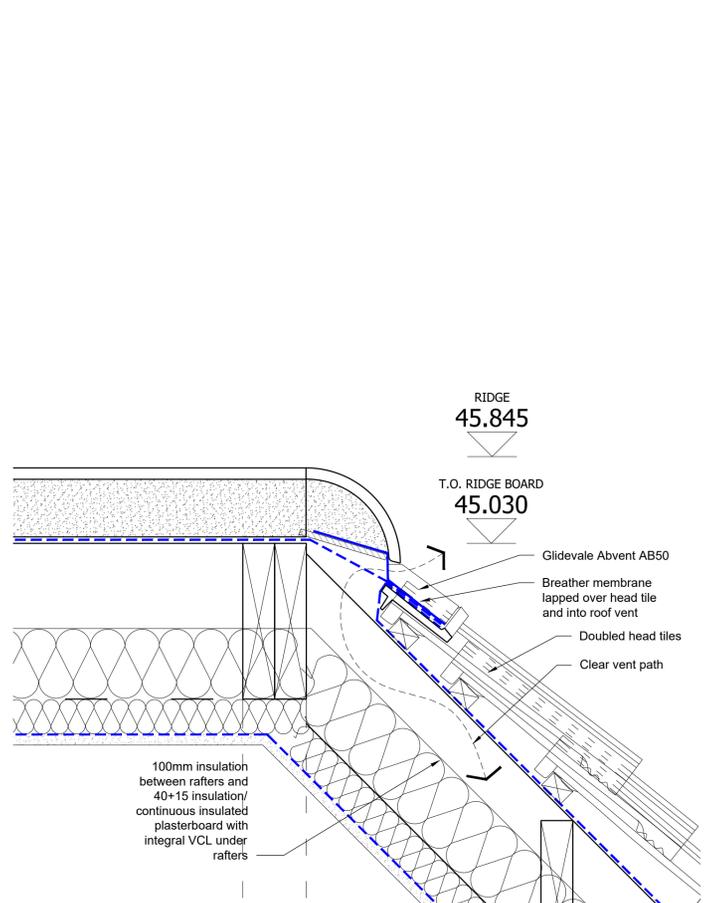

25 Ridge and Verge connection near entrance

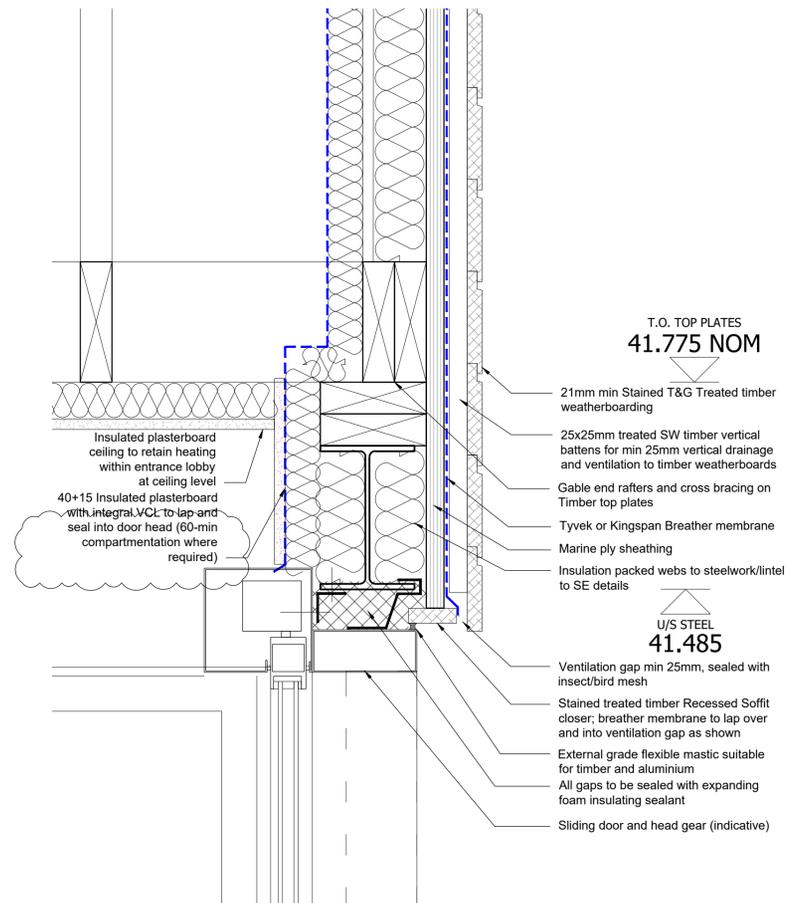

26 Entrance Door head at gable end



- DETAIL NOTES, ROOF TILES:**
- Tiles must be laid in a straight bond pattern
 - Tiles must be hung on their ribs
 - It is always advised that tiles are laid at mid shunt, although the precise roof details may require tiles to be laid more open or closed
 - When laid at mid shunt, tiles will have +/- 1.5 mm of shunt to provide laying flexibility
 - Eaves Comb must be used at all eaves situations
 - Dentil slips must be used for mortar bedded ridges and hips
 - Individual tiles can be nailed, clipped or nailed & clipped
 - Always refer to FixMaster for a BS 5534-compliant fixing specification
 - When clipping verges, both left-hand and right-hand perimeter tiles must be clipped

CROWTHER ARCHITECTS ASSOCIATES
 CROWTHER ASSOCIATES ARCHITECTS LLP
 25 PELHAM HOUSE
 25 PELHAM SQUARE
 BRIGHTON BN1 4ET
 T: 01273 695535
 www.crowtherassociates.co.uk

client: Wivelsfield Village Hall
 project: Wivelsfield Village Hall Extensions
 drawing: GENERAL ARRANGEMENT BUILDING DETAILS, SHEET 1 DETAILS 11-16
 date: Apr 2019 scale: 1:50 @ A1 dwn: CAD checked: GT
 status:

TENDER
 job no: C-1732 (30)002 dwn no: T1 revision: