

CRANLEIGH PARISH COUNCIL


Snoxhall Fields Play Park Railings Specification January 2021

Purpose

- To re-purpose the pedestrian guard rail fencing and gates from the play park to create a barrier along the southern boundary of Snoxhall Fields access road.
- To provide new play park railings, pedestrian and maintenance access gates.
- To submit a bid for s106 planning obligation funding for the project.

Access Road Railing Specification


- Remove the pedestrian guard rail and gates from around the play park.
- Clean off concrete making fencing ready for re-use.
- Install the pedestrian guard rail fencing along the southern boundary of the access road from the metal gate at the Knowle Lane end to the top entrance to the field by the green container.
- Install the double maintenance gates opposite the car park entrance.
- Install two pedestrian access gates on the eastern end of the fencing and opposite the sub-station.
- Install three pedestrian access gates equally spaced between the metal gate at the Knowle Lane end of the access road to the outdoor gym equipment.

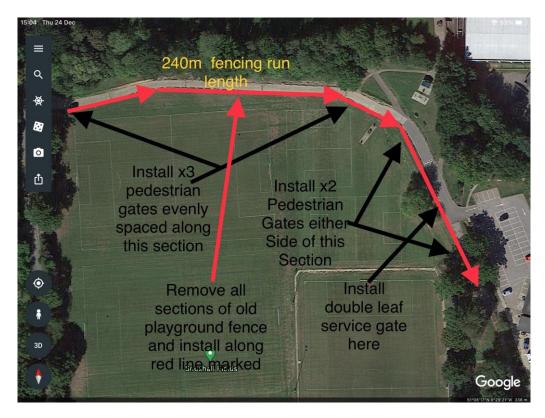

New Play Park Railings Specification

Supply and installation of:

- Bow top railings, colour green, height 1.2m, position indicated by red line on plan below
- 7 self closing pedestrian access gates
- 1 set of double maintenance gates spanning 3m with closing mechanism suitable for padlock fastening.

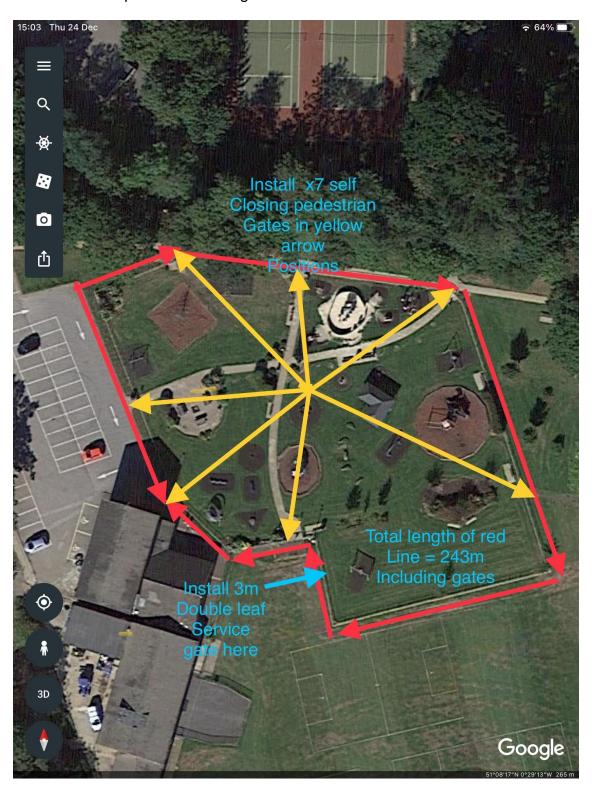


Bow Top Railing Style



Statutory Undertakers

- The Grounds Manager advises that surveys of electrical services will be required throughout whole length of project to trace electrical services not just street lighting, this was highlighted by drainage contractors during other works to field on north downs side of field.
- Water services that supply the pavilion from the Hitherwood alleyway also need to be considered, they should not effect the construction works but highlighting them would still benefit the contractors.

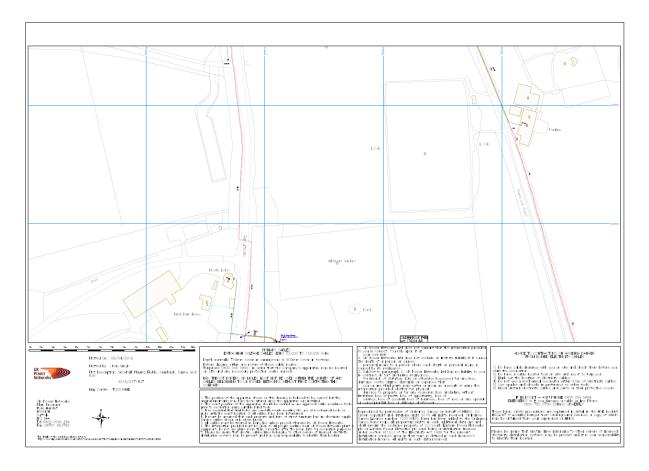

Additional Information:

- You will need to include CAT scanning of the entire site for underground services. We are aware of some services running in parallel with the Downs Link.
- Please include a ROSPA post installation inspection of the fencing in your quotation.
- You will be required to provide RAMS.
- Please include a copy of your public liability insurance.
- Please provide details of a reference.

Please submit your quotation with a copy of your public liability insurance to Cranleigh Parish Council by 9.00am on Monday 22 March 2021.