

**Kier Highways Project No: 570129B**  
**Client Reference No:**  
**A36 St Pauls to Skew Bridge Lighting**  
**Pre-Construction Information**

	Yes	No
Are Works to be carried out under the Commission / Contract Health and Safety Plan?		X
Is the Scheme notifiable under the CDM Regulations 2015?		X
1. Last longer than 30 working days and have more than 20 workers simultaneously at any point in the project;		
2. Exceed 500 person days		

Project type as categorised by GG104 (if applicable to contract / delete in not required)	A, B or C
* If applicable GG104 will determine the Kier Highways minimum Scheme Principal Designer (Scheme PD) level. Refer to SHEMS-FOR-HIG-S-055 for GG104 type categorisation and minimum Scheme PD level. Type A projects the Design Team Lead, Type B projects the Senior Manager, Type C projects the Service Director.	<b>A</b>

This document has been produced in accordance with the recommendations and requirements of the Construction (Design and Management) Regulations 2015.

Prepared by: Designer	
Reviewed by; Design Team Lead	
Accepted by: Scheme PD	

'Reviewed by' & 'Accepted by' can be the same person for GG104 type A projects (where the Design Team Lead is the Scheme PD)



Authorised By: [REDACTED]	Page 1 of 12	SHEMS-FOR-HIG-051
Author: Highways CDM Team	Date: October 2019	Version: 1.0
As part of our system review, this document is valid until April 2020		



Site Specific Hazards Identified in Design		
<p><b><i>ONLY include significant and unusual hazards that a competent contractor would need to know, could not reasonably foresee, or are likely to be difficult to manage effectively.</i></b></p> <p><b>Note – Consideration to be given to all ‘populations’ affected, Workers, Users, Other Parties.</b></p>		
Activity	Residual Hazard	Comments
All Activities	Working on or adjacent to the live carriageway	Traffic Management and buildability reviewed with Contractors during the design stage to ensure the scheme can be built safely. Traffic management designed by the CWF Contractor in accordance with Chapter 8.
All Activities	Public Risk	Contractor to erect warning and prohibition signs. Public access routes within the site limits shall be closed with signed diversion routes in place. Consider additional controls as pedestrian barrier and extra personnel.
Workers	Lifting chambers manual handling	Hazard cannot be designed out. Contractor will be aware of the hazard and safe working method. Avoid where possible
All activities	Covid 19	Government guidelines on social / physical distancing to be incorporated into RAMS

**1 Project Description**


**Scope of Works**

The proposed duct survey works are essential to develop a LED luminaire and column replacement scheme on the A36 between St Pauls to Skew Bridge.

To undertake trial pits and cores across the area shown on drawing(s):  
 HE570129C-KIER-HLG-A36\_ML\_Z-DE-EO-0100\_11;  
 HE570129C-KIER-HLG-A36\_ML\_Z-DE-EO-0100\_12;  
 HE570129C-KIER-HLG-A36\_ML\_Z-DE-EO-0100\_13.

To undertake Ground Penetrating Radar survey shown on drawing(s):  
 HE570129C-KIER-HLG-A36\_ML\_Z-DE-EO-0100\_14;  
 HE570129C-KIER-HLG-A36\_ML\_Z-DE-EO-0100\_15;  
 HE570129C-KIER-HLG-A36\_ML\_Z-DE-EO-0100\_16.

**Location**

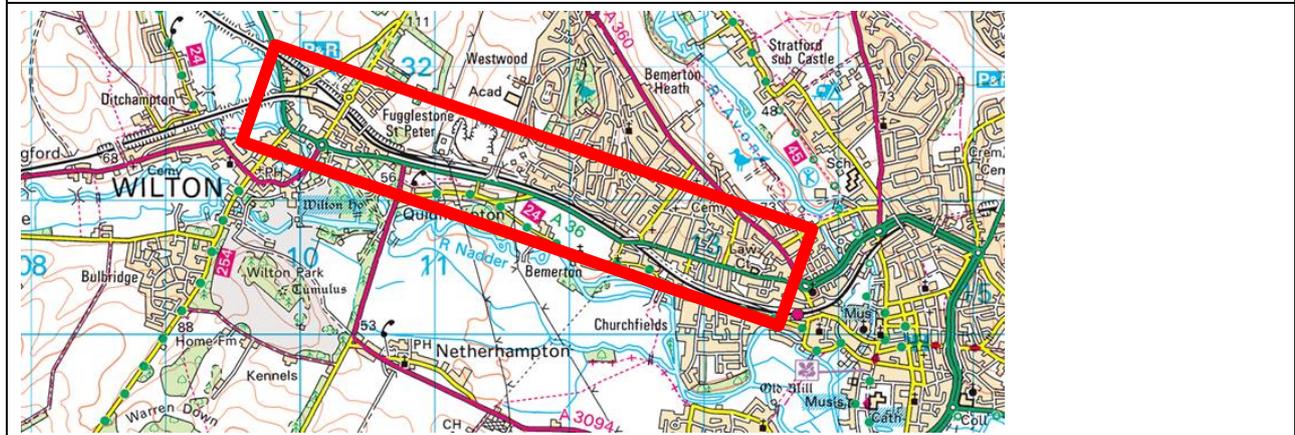

See Location Plan listed in current Document Issue Sheet or Appendix A.

Site Address | A36 St Pauls to Skew Bridge

**Site Photographs**

<b>MP</b>	From	58.3	To	63.0	<b>OSGR</b>	From	409757, 1322934	To	413707, 130350
-----------	------	------	----	------	-------------	------	--------------------	----	-------------------

**Traffic Management**

Traffic Management will be lane closure (TBC by HE)

The A36 carriageway speed limit varies between 30, 40 and 50mph

1. A36 Southbound Northern section: AADF 5,746
2. % of commercial vehicles within AADF 9.0%.
3. A36 Northbound Northern section: AADF 5,890
4. % of commercial vehicles within AADF 8.4%.
5. A36 Southbound Southern section: AADF 8,254



Authorised By: [REDACTED]	Page 3 of 12	SHEMS-FOR-HIG-051
Author: Highways CDM Team	Date: October 2019	Version: 1.0
As part of our system review, this document is valid until April 2020		



1 Project Description					
Anticipated Working Hours, subject to Traffic Counts			Night works are anticipated (TBC by HE)		
<b>Mobilisation Period</b>	TBC	<b>Anticipated start date</b>	TBC	<b>Anticipated end date</b>	TBC



Authorised By: [REDACTED]	Page 4 of 12	SEMS-FOR-HIG-051
Author: Highways CDM Team	Date: October 2019	Version: 1.0
As part of our system review, this document is valid until April 2020		





3. Scheme Specific Requirements			
	Yes	No	Comments
Does an H&S file exist?		X	N/A
Site Welfare	X		<i>Principal contractor to provide</i>
Security / Segregation		X	
Are there any other projects taking place in the vicinity?		X	
Are there any restrictions on vehicle movements?	X		<i>All site vehicles (incl. delivery vehicles) must abide by the TM requirements and regulations</i> 1. <i>enter and exit site from the dedicated points;</i> 2. <i>Comply with the designated site safety speed limits;</i> <i>All vehicles within Traffic Management shall comply with the conspicuity requirements of Chapter 8.</i>
Are there any restrictions on deliveries, waste collection, or storage?	X		<i>No deliveries to take place unless Traffic Management is in place.</i> <i>No waste shall be stored on site.</i> <i>Waste Carriers Licence required</i>
Are there any parking restrictions?	X		<i>All vehicles and plant within the works area shall be parked in a safe area clear of access and egress points.</i> <i>All vehicles and plant shall be removed from the carriageway prior to removal of traffic management.</i> <i>No Private vehicles are allowed on site</i>
Height Restrictions	X		
Overhead Cables	X		<i>Positions of overhead cables are shown on contract drawings. Safe working heights to be determined in accordance with GS6 where required.</i>
Structures	X		<i>See Appendix F.</i>
Will fire precautions be required?		X	<i>Suitable fire precautions shall be in place and in accordance with the Contractors hot works permit.</i>
Are emergency procedures and means of escape required?		X	<i>The Contractor shall ensure that emergency procedure plans are in place and all staff have been inducted.</i> <i>One lane will remain serviceable throughout the works duration for emergency services at all times.</i> <i>Nearest A&amp;E hospital</i> <i>Salisbury District Hospital, Odstock Road, Salisbury, SP2 8BJ</i> <i>Tel: 01722 336 262</i>
Are there any areas in or around the site classified as no-go areas?		X	<i>No site personnel shall enter the safety zones or tapers within the extents of the traffic management unless trained and competent for installation/removal/maintenance of TM.</i> <i>Sub-Contractor's Method Statements and Risk Statements shall contain suitable risk control to protect pedestrian workers and plant operators.</i>
Are there any noise restrictions?	X		<i>Residents adjacent to sites, Noise consideration. However, unlikely to be applicable due to the nature of the works.</i>

3. Scheme Specific Requirements			
	Yes	No	Comments
Are temporary works required?		X	<i>Unlikely to be applicable due to the nature of the works.</i>
Are there any vibration restrictions?		X	<i>Unlikely to be applicable due to the nature of the works.</i>
Are there any poor or hazardous ground conditions		X	<i>Unlikely to be applicable due to the nature of the works.</i>
Are there any unstable structures?		X	<i>Unlikely to be applicable due to the nature of the works.</i>
Are there any areas classed (existing or designed) classed as confined spaces?		X	<i>Unlikely to be applicable due to the nature of the works.</i>
Are there any smoking restrictions?	X		<i>No smoking is allowed on site. Designated smoking areas to be confirmed during site inductions.</i>
Any environmental constraints identified?		X	<i>Unlikely to be applicable due to the nature of the works.</i>

## Materials and Substances with Health and/or Safety Hazards

### Asbestos

*If Asbestos Containing Materials are found during construction, all works shall stop immediately and the area is to be isolated from the workforce. The Contractor must inform the Principal Contractor, who will then implement the necessary emergency response procedures in line with the Company policy.*

*Under no circumstances will the Contractor attempt to remove any Asbestos Containing Materials without prior consent from the overseeing organisation.*

### Lead

*Scope of Works are unlikely to encounter lead. Consider existing paint coatings to bridge beams.*

### Tar based pavement/surfacing

*Scope of work are unlikely to encounter tar.*

**Leptospirosis/Weil's disease / Psittacosis** *Contact with highway drainage during resurfacing works potential risk of Weil's disease. The Contractor is to ensure sufficient welfare facilities are in place at all times. All appropriate PPE must be worn at all times.*

*Any instances of illness / sickness on site should be reported to the Site Manager/Principal Contractor Representative immediately and the persons affected should seek medical advice.*

### Covid-19 pandemic

*The Contractor is to ensure they are protecting their workforce and minimising the risk of spread of infection. They must comply with the latest Government advice on working safely during coronavirus covid-19 which is currently available at <https://www.gov.uk/guidance/working-safely-during-coronavirus-covid-19/construction-and-other-outdoor-work>. Further guidance is given in the Construction Leadership Council's "Construction Sector – Site Operating Procedures". The latest version may be found at <http://cic.org.uk/important-documents.php>*

*The health and safety requirements of any construction activity must not be compromised. If an activity cannot be undertaken in line with social distancing being implemented, or by exception, safely, without risk and mitigating measures then it shall not take place.*



Authorised By: [REDACTED]	Page 8 of 12	SEMS-FOR-HIG-051
Author: Highways CDM Team	Date: October 2019	Version: 1.0
As part of our system review, this document is valid until April 2020		



<b>Existing Services</b> Refer to STATS plans listed in Appendix D				
<b>Statutory Undertaker</b>	<b>Not Present</b>	<b>Over head</b>	<b>Under ground</b>	<b>Comments</b>
<b>Electricity</b>				
400/132kV [pylons]		X		Adjacent to works area
66kV	X			
33kV		X		Adjacent to works area
11kV		X	X	Within works area, locate prior to works
240/415Volts			X	Within works area, locate prior to works
<b>Water (Foul and Potable)</b>				
Public Foul			X	Within works area, locate prior to works
Pressurised Foul	X			
Public Combined Gravity	X			
Pressurised Combined	X			
Culverted Watercourse	X			
Water Main			X	Within works area, locate prior to works
Aqueduct	X			
<b>Communications</b>				
Communications	X			
<b>British Telecom</b>				
British Telecom		X	X	Within works area, locate prior to works
<b>National Grid</b>				
National Grid	X			
<b>Transco</b>				
LP Mains			X	Within works area, locate prior to works
MP Mains	X			
IP Mains	X			
LHP Mains	X			
NHP Mains	X			
<b>Government Pipelines</b>				
Government Pipelines	X			
<b>Fisher German Pipelines</b>				
Fisher German Pipelines	X			
<b>Energis</b>				
Energis	X			
<b>Motorway Communication</b>				
Motorway Comms	X			
<b>Street Lighting</b>				
Street lighting			X	Within works area, locate prior to works
<b>Highway Drainage</b>				
				Within works area, locate prior to works
<b>Other</b>				
Virgin Media			X	Within works area, locate prior to works

**5. Health and Safety file requirements**

All information will be produced in an electronic format. The format of the electronic data issued is to be as follows: All documents and product data sheets are to be in PDF format, drawings are to be in PDF and AutoCAD DWG format.

The Principal Contractor shall collate all appropriate information as it becomes available, and this shall subsequently be collated in the File. The Principal Contractor is to implement an early procedure that advises contractors and materials suppliers of the detailed requirements for this record information. The health and safety file will be created and/or updated in accordance with the requirements of the IAN105/08.



Authorised By: [REDACTED]	Page 10 of 12	SHEMS-FOR-HIG-051
Author: Highways CDM Team	Date: October 2019	Version: 1.0
As part of our system review, this document is valid until April 2020		



## Appendix A - Location Plans

Locations shown on drawing(s):

HE570129C-KIER-HLG-A36\_ML\_Z-DE-EO-0100\_01,

HE570129C-KIER-HLG-A36\_ML\_Z-DE-EO-0100\_02.

## Appendix B - Construction Drawings

See Document Issue Sheet for list of current scheme drawings, alternately list below.

Reference	Rev	Title

## Appendix C – Existing Records and As-Built Drawings

See Document Issue Sheet for list of existing records and as-built drawings, alternately list below.

Reference	Rev	Title	Company

## Appendix D - Statutory Undertaker Drawings

See Document Issue Sheet for list of statutory undertaker drawings, alternately list below.

Title	Company
HE570129C-KIER-HLG-A36_ML_Z-DE-EO-0100_03	Western Power Distribution
	Wessex Water
HE570129C-KIER-HLG-A36_ML_Z-DE-EO-0100_04	BT
	Virgin Media
	SSE
HE570129C-KIER-HLG-A36_ML_Z-DE-EO-0100_05	Highway England
	SGN
	City Fibre

## Appendix E – Overhead cables

See GS6 Measurements and Essential Safety Data, or alternately list below.

Overheads cables are identified and clearly marked on the contract drawings.

**Appendix F - List of Structures**

Structure	Type	Location Ref	Str key	OSGR
Railway Bridge	Overbridge	A36//58.5		409825, 132093
Railway Bridge	Overbridge	A36//58.8		49886, 131772
Skew Bridge	Underbridge	A36//61.7	9568	412468, 130694

**Appendix G - Asbestos Action Plans**

Refer to SWDSC Asbestos: AAP A36 Wilton RAB\_M27 J2 SB & NB



Authorised By: [REDACTED]	Page 12 of 12	SHEMS-FOR-HIG-051
Author: Highways CDM Team	Date: October 2019	Version: 1.0
As part of our system review, this document is valid until April 2020		

