

Alpine Plus Deep Filters Laminated Polyester

New range of laminated polyester filters with 1.2 metre media bed depth. Available with lateral under drain system or nozzle plate option.

Ideal solution for refurbishments, light commercial pools, hydro-therapy pools and commercial spas.

Benefits

- Improved filtration due to deeper media bed enabling longer contact time with the water.

Standard Features

- Bolted top sand charge lid
- Ø200mm sand service hatch (Ø400mm available on 1050 and 1200 models)
- Manual air and water purge
- Top mounted pressure gauge
- Internal pipework is supported to provide stability during operation
- Reinforced base for extra strength under loading


Technical Data

1.2 metre media bed depth
2.5 bar max operating pressure
3.75 bar max test pressure
50°C max working temperature

Options

- Sight glass
- Ø400mm service hatch on 1050 & 1200 models
- For ozone treatment, filters with an internal vinyl ester coating are required. Price on application.

5 Year Warranty

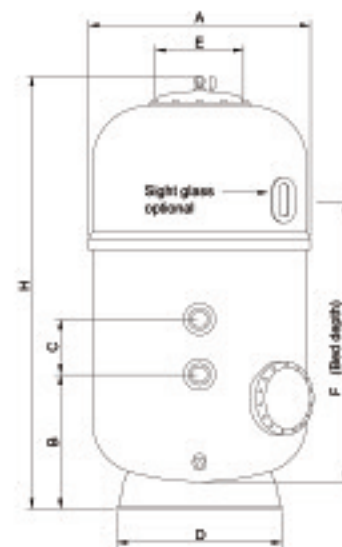

Alpine Plus Filter With Laterals

Code	Ø mm	Conn mm	Filter (M ²) Area	Output m ³ /hr @ 45m ³ /m ² /hr
FAHL650L	650	1.5"	0.33	15
FAHL800L	800	2"	0.50	23
FAHL950L	950	2"	0.70	32
FAHL1050L	1050	3"	0.86	39
FAHL1200L	1200	3"	1.13	50

Alpine Plus Filter With Nozzle Plate

Code	Ø mm	Conn mm	Filter (M ²) Area	Output m ³ /hr @ 45m ³ /m ² /hr
FAHL650N	650	1.5"	0.33	15
FAHL800N	800	2"	0.50	23
FAHL950N	950	2"	0.70	32
FAHL1050N	1050	3"	0.86	39
FAHL1200N	1200	3"	1.13	50

Dimensions										
Code	A mm	B mm	C mm	D mm	E mm	F mm	H mm	W kg	Sand kg	Gravel 6mm (kg)
FAHL650L	680	720	125	490	200	1200	1905	105	470	100
FAHL650N										50
FAHL800L	825	685	230	625			1950	135	660	165
FAHL800N										70
FAHL950L	970	685	230	705			1960	160	1015	260
FAHL950N										100
FAHL1050L	1090	610	270	775	400		2095	200	1240	320
FAHL1050N										120
FAHL1200L	1255	665	270	940			2170	230	1665	410
FAHL1200N										160

Certikin