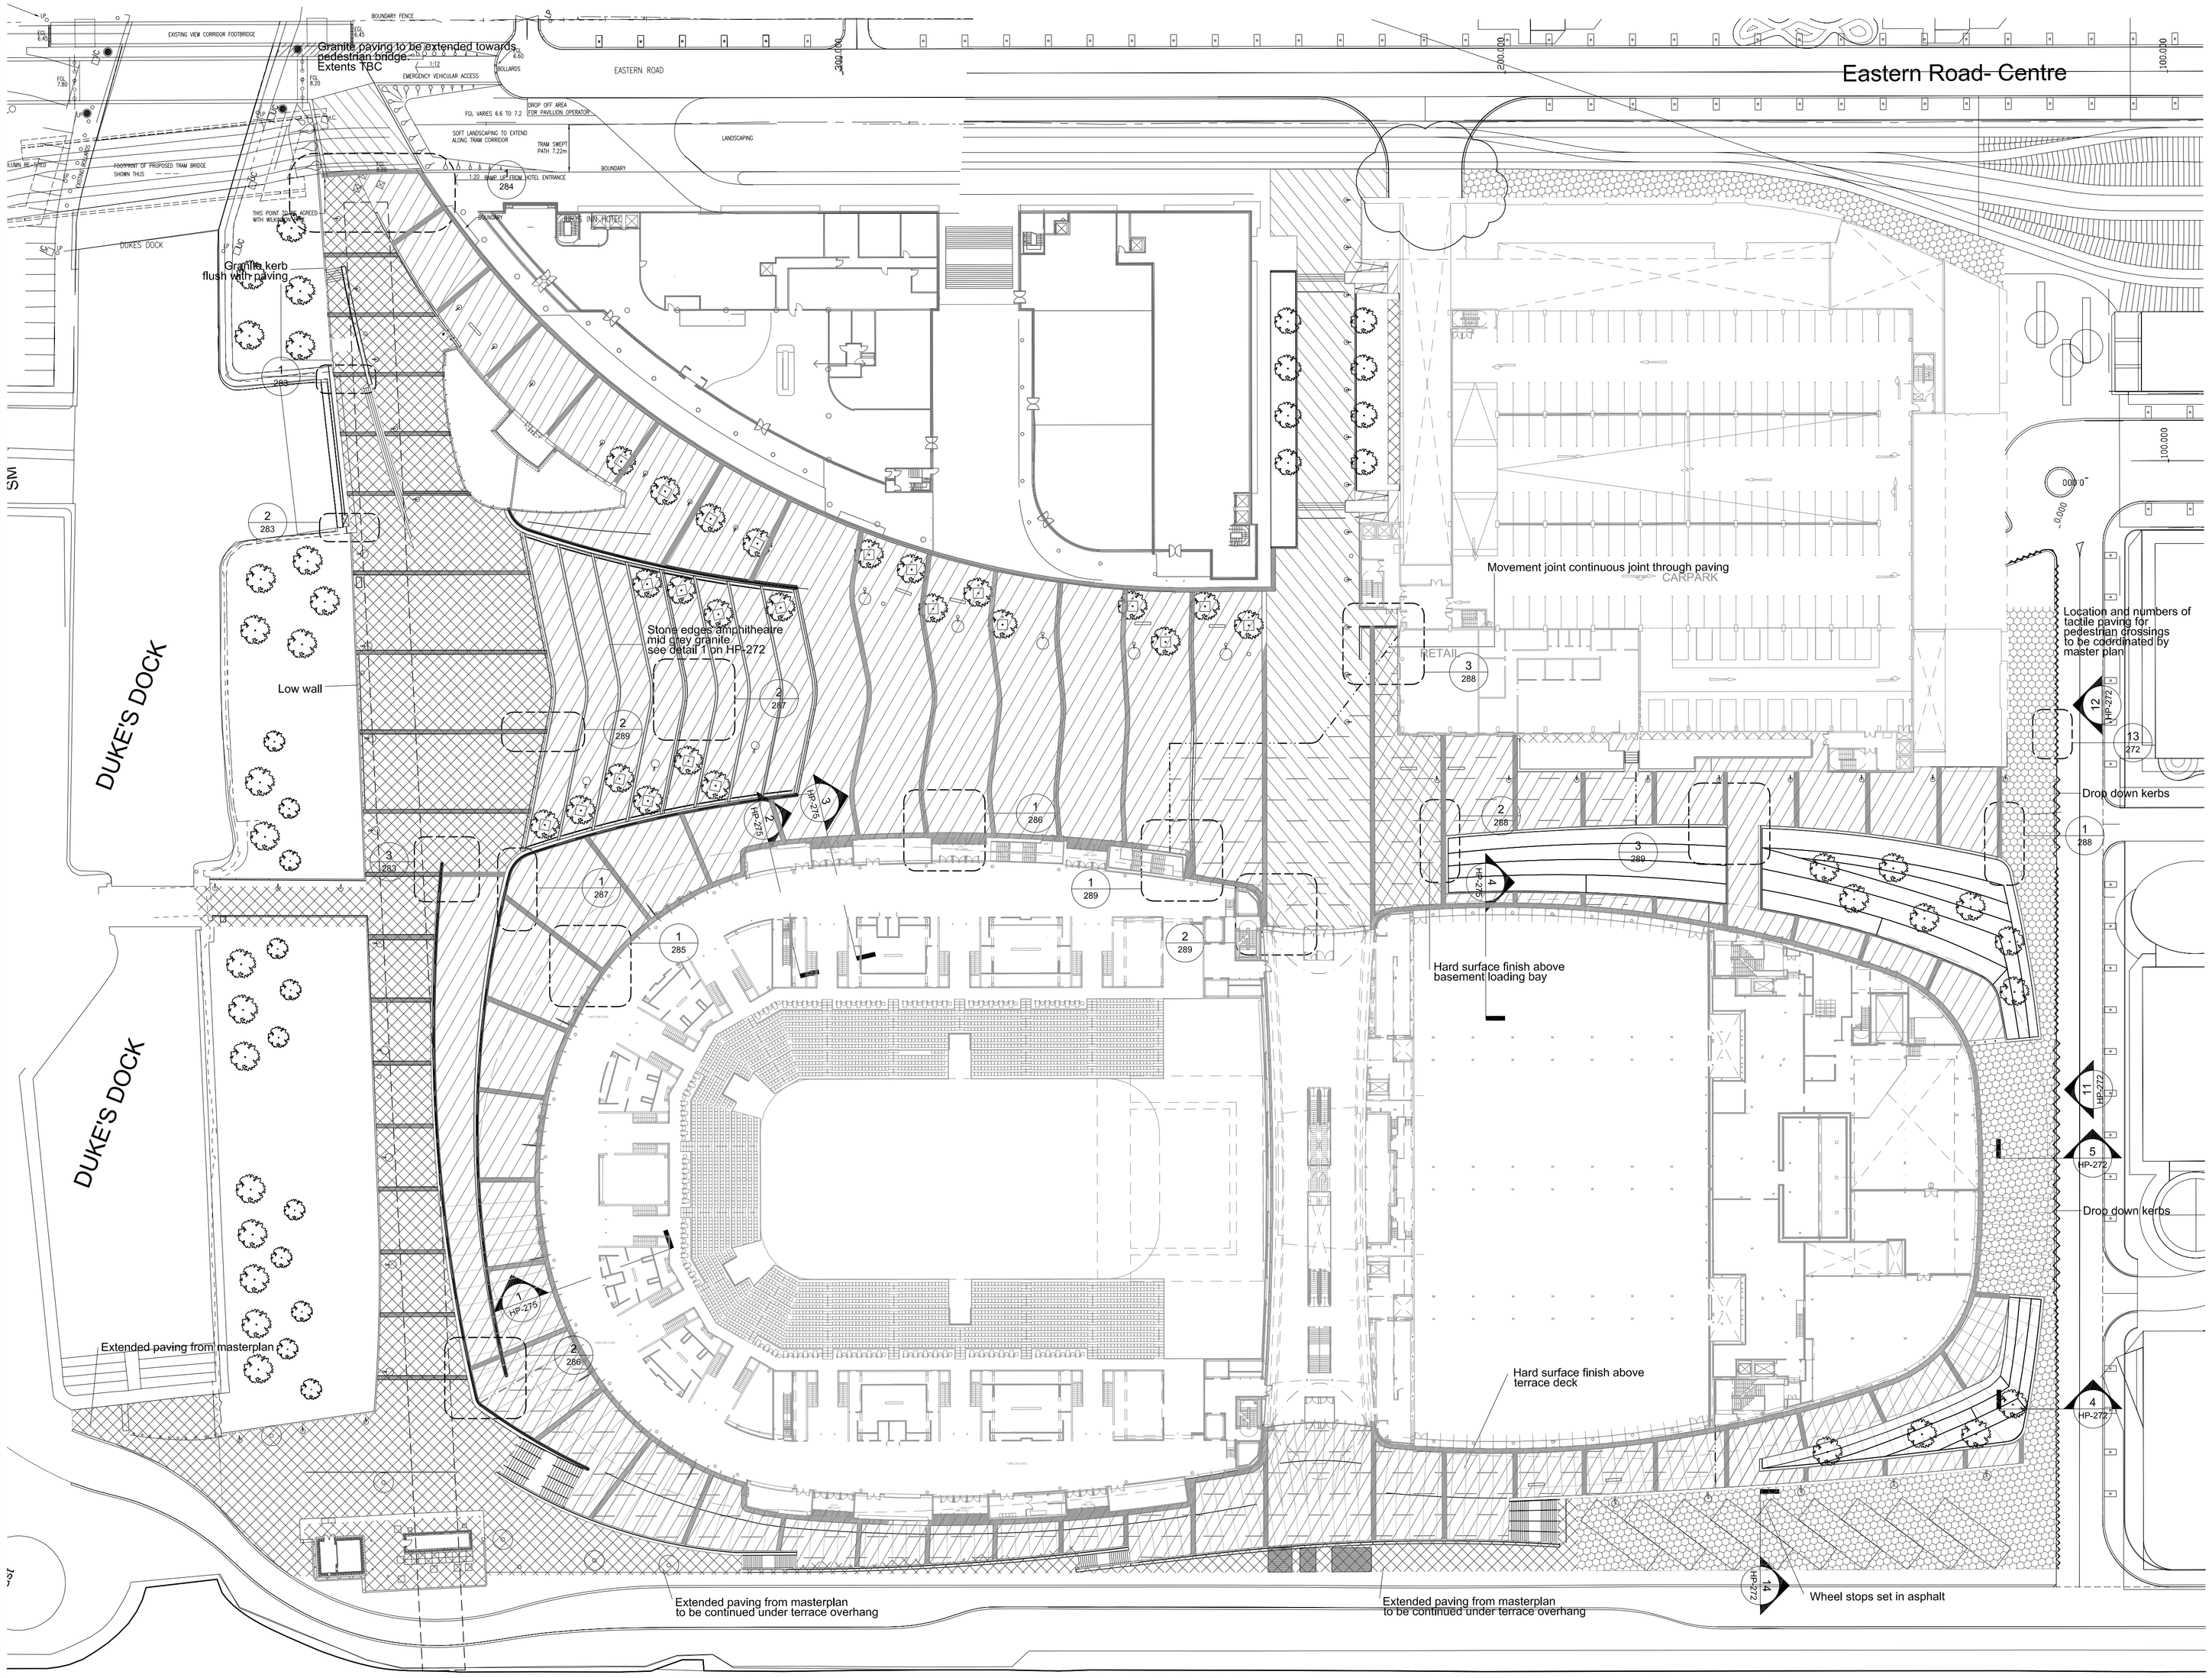

Notes :

Flamed
Silver grey granite flags

Contrasting mid grey
granite paving
cropped setts

silver grey concrete paviours
Conservation range
(as Master Plan)

Contrasting concrete paving
Conservation range
mid grey (as Master Plan)

Asphalt

Paving above structural slab
(loading bay & voids)

Movement joints:
- everywhere between paving and buildings
- everywhere between setts and flags
- everywhere above edge of decks/fill
- approx. every 20 meter in mortared granite

Confirmation of all movement joints by Buro Happold

Drop down kerb

Kerb

FOR DRAINAGE DETAILS SEE ALSO
CIVL ENGINEER'S DWGS
BHC2000 SERIES

revision	date	drawn by	notes
L	15.02.08	WW	For construction
K	23.10.07	WW	For construction
J	02.10.07	WW	For construction remove wheel stops
I	08.08.07	SL	For planning
H	10.07.07	SL	For construction
G	05.07.07	WW	For construction
F	14.06.07	SL	Interim construction package
E	18.04.07	SL	Draft construction package
D	17.12.05	SL	Tender re-issue after VE
C	13.06.05	SL	Stage E report
B	12.05.05	SL	Stage E Tender Update
A	04.04.05	SL	STAGE E TENDER

Gustafson Porter Ltd

Unit D, Linton House
39-51 Highgate Road
London NW5 1RS

T +44 20 7267 2005
F +44 20 7485 9203
E enquiries@gustafson-porter.com

client
Wilkinson Eyre Architects

project
Kings Waterfront, Liverpool

package
External Works 9010

drawing title

HARD SURFACE EXTENTS PLAN

drawing number			revision
GP-LKW135-HP-260			L
scale	date	drawn by	checked by
1:500 @ A1	17.03.05	SL	MB

DISCLAIMER :
This drawing is to be read in conjunction with all structural, M+E engineers and architects drawings & specifications. Do not scale off this drawing. The contractor is responsible for site measuring all required materials prior to ordering. Any discrepancies must be noted in writing to Gustafson Porter Ltd. Gustafson Porter does not accept responsability for accuracy of survey information. This drawing is copyright