


# NAL ART OF PERSUASION - LIGHT SHEET DETAIL

1200mm X 3000mm 4-sided LED light sheet with opal acrylic diffuser facing downwards.

100mm return to minimize light spillage. Same material and finish as side panels.

Aluminium back panel carrying the light sheet. Suspension wires will be connected to back panel. Side panels with graphics will be fixed to the either side of back panel. Finish TBC!.

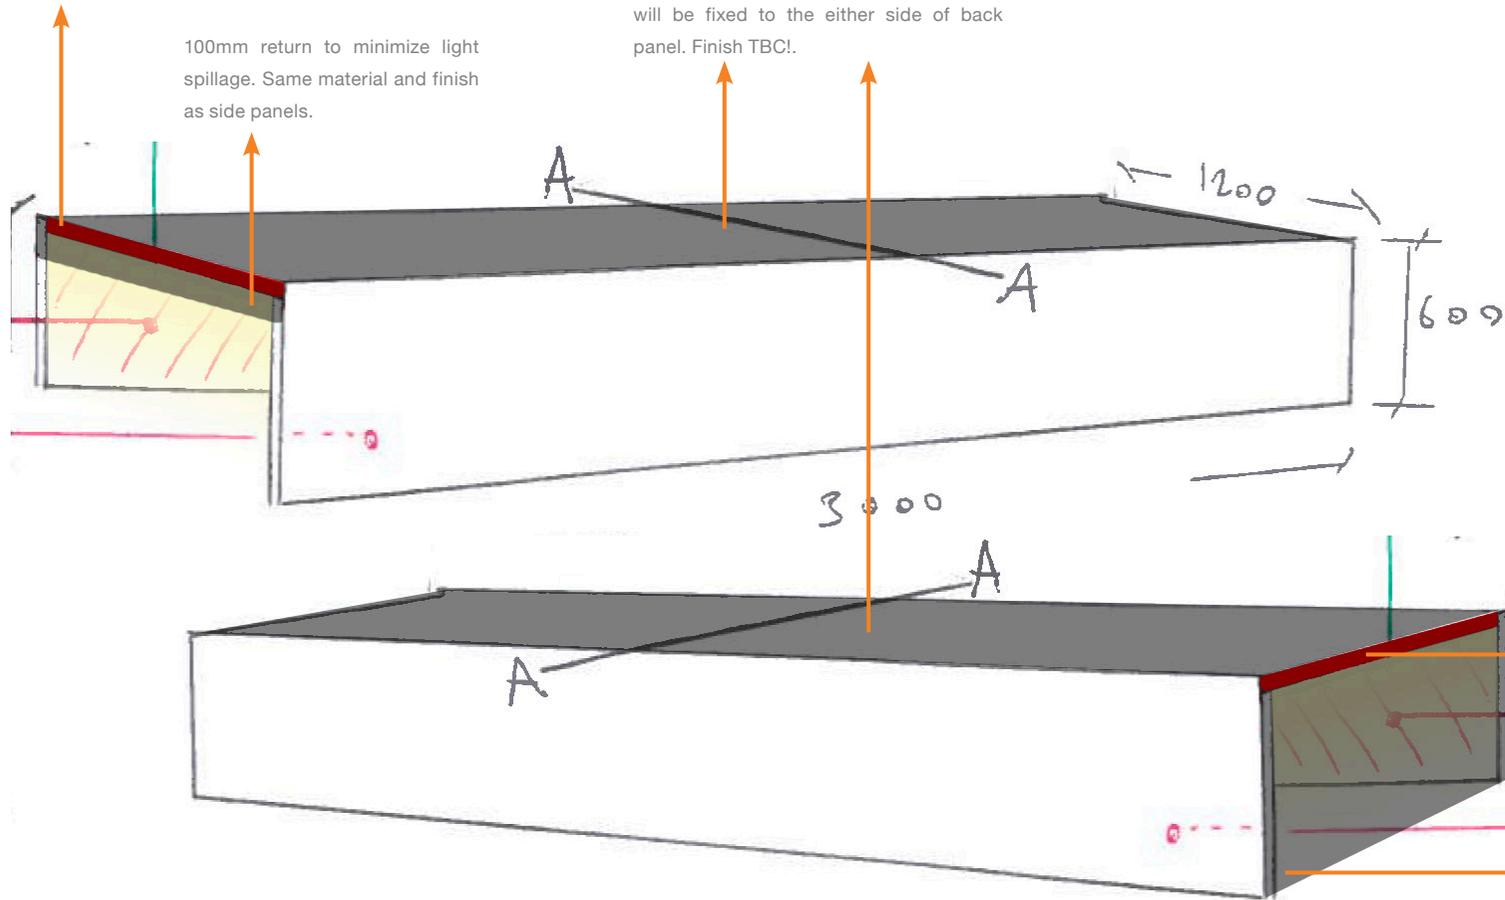

## LED LIGHT SHEET EQUIPMENT INFO :

- Applelec 8mm, 4-sided RGB LED light sheet, 5050 SMD, IP54
- 35lm/W, 13W/m
- 1200mm X 3000mm dimensions
- 1200mm X 3000mm, 8mm thick opal acrylic diffuser.
- 25mm aluminium return to hide the side LEDs and with folded back sheet to carry the light sheet.
- Suspension wires as manufacturer recommended
- DMX driver and dimmer for RGB color change and dimming control.
- Drivers and dimmers will located inside the ceiling. TBC!
- Red-Green-Blue colors will change on a loop scene. Loop will start and stop with exhibition times. Color shift will be smooth.
- Programming will be done on site, by instructions of NAL and Planlux for timing and dimming levels.
- Contact: Sandi Moolman, Business Development Manager, Applelec, Sandi.Moolman@applelec.co.uk +44 (0) 7714 168 382, +44 (0) 1274 774 477

1200mm X 3000mm 4-sided LED light sheet with opal acrylic diffuser facing downwards.

End side of the installation will be completely closed to prevent light spillage. Same material and finish as the side panels with graphics.

