
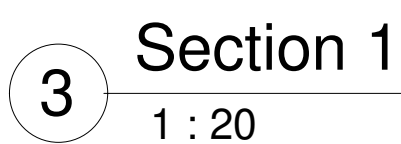


STEEL FABRICATION DRAWINGS TO
BE ISSUED TO THE ENGINEER FOR
APPROVAL PRIOR TO FABRICATION.

For site setting out refer to the Architect's drawings.

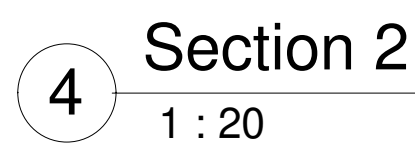


Walkway for infrequent maintenance use only.
Max 150kg/m2. Suitable signage to be provided.

Should any additional hazards be identified the contractor should notify all the relevant project team members.

B1	PFC150x90x24	Steel, 43-355	
B2	SHS50x50x4	Steel, 43-355	Tie beams
B3	UC152x152x30	Steel, 43-355	Galvanised
B4	UB152x89x16	Steel, 43-355	Galvanised
BP	100x20	Steel, 43-355	300mm long bearing Plate
HB	CHS21.3x3.2	Steel, 43-355	Horizontal bracing - Galvanised
VB1	60x8	Steel, 43-355	Vertical cross bracing
VB2	100x8 2	Steel, 43-355	Vertical cross bracing - Galvanised

D1	25mm deck	Steel	GRP deck
----	-----------	-------	----------

[illegible]

 <p>consulting . engineering . designing</p> <p>LONDON OFFICE 020 8940 7810 EXETER OFFICE 01392 363497</p> <p>info@structurehaus.com www.structurehaus.com</p>			
<p>PROJECT</p> <p>Charter Hall, Okehampton</p>			
<p>TITLE</p> <p>Decked Access Walkway Details</p>			
<p>SCALE (@ A1)</p> <p>As indicated</p>			
<p>DRAWING NUMBER</p> <p>052229E_600</p>			<p>REV</p> <p>A</p>
<p>DRAWN BY</p> <p>NCS</p>	<p>CHECKED BY</p> <p>JM</p>	<p>DATE</p> <p>06/16/22</p>	