




D0.02/01
914x1981
Vision Panel
FD30S
M/DH

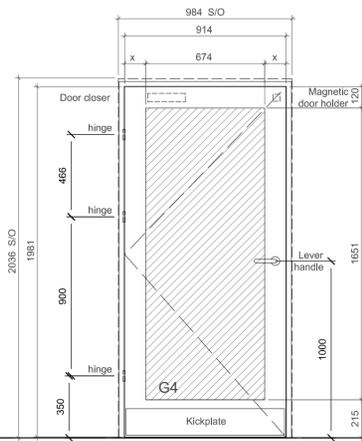


D0.09/01
914x1981
Vision Panel
FD30S
M/DH

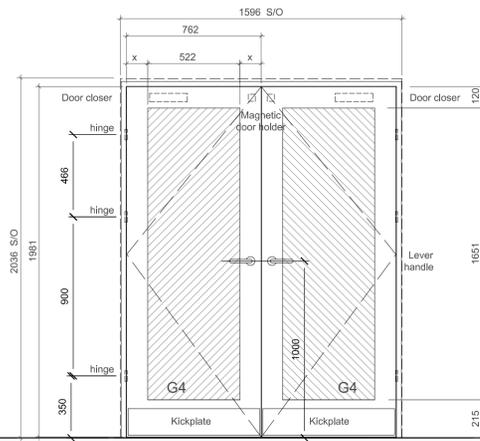


D0.02/02
2NO. 762X1981
Vision Panel
FD30S
M/DH

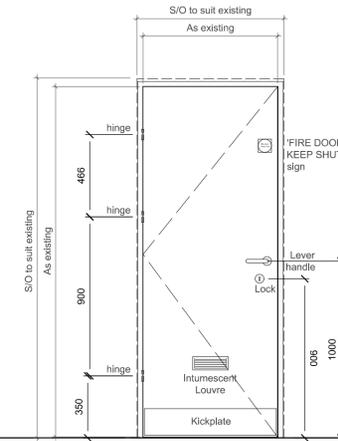


D0.13/01
Existing door removed and
retained from lift lobby (item
19 on demolition plan)
FD30S

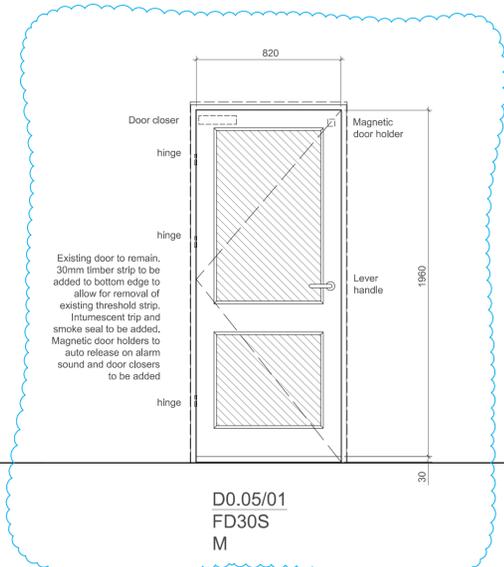


D0.05/01
FD30S
M

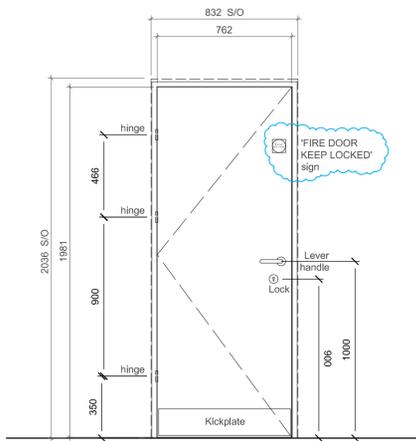


D0.08/01
762X1981
FD30S
M

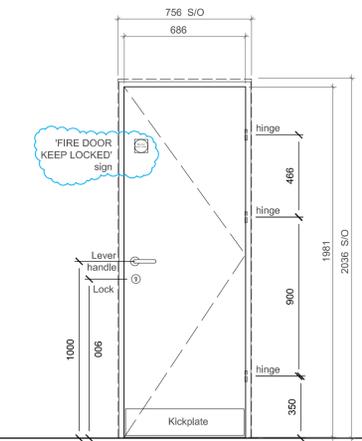


D0.07/01
686X1981
FD30S
M

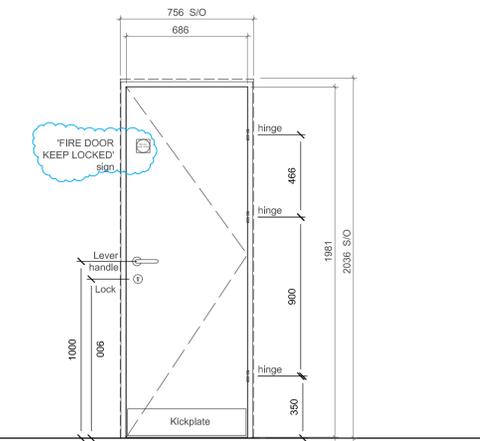

D0.09/02
686X1981
FD30S
M

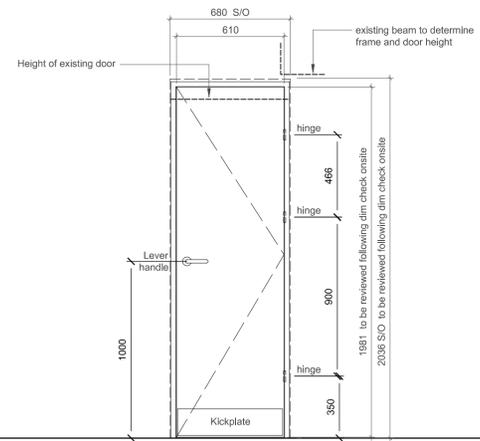

D1.06/01
686X1981
M

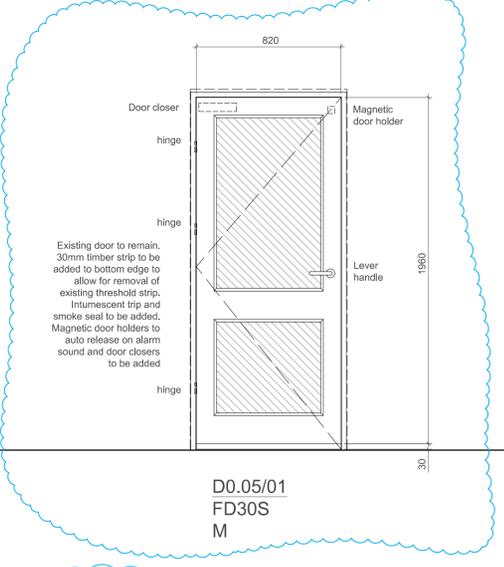

D0.05/01
FD30S
M

DOOR SCHEDULE

DOOR REF.	ROOM LOCATION	SWITCHABLE/OPERATING (W, X, Y, Z)	PARTICLE (M, F5, F10) (mm) (including glass)	LEAF SIZE (mm) (W x H x D)	DOOR SWING (LHS/RHS/DD)	VISION PANELS (if applicable)	FIRE RATING	SMOKE/INTUMESCENT SEAL	SELF-CLOSING/ELECTROMAGNETIC DEVICE	DOOR TYPE REF.	ARCHITRAVES	FRAMESTOPS	DOOR & FRAME FINISH	FALL OPEN/SECURE
D0.02/01	Public Space 1	984 x 2036	N/A	914 x 1981 44mm thick Firefield	LHS-S	Fire Rated Clear Toughened Safety Glass	FD30S	YES	SC + ED	N/A	16x69mm MDF Rounded or Chamfered	Firefield Ref: FCX326	Painted finish [white]	FAIL CLOSED
D0.09/01	Public Space 3	1010 x 2085	N/A	914 x 1981 44mm thick Firefield	RHS-S	Fire Rated Clear Toughened Safety Glass	FD30S	YES	SC + ED	N/A	16x69mm MDF Rounded or Chamfered	Firefield Ref: FCX326	Painted finish [white]	FAIL CLOSED
D0.02/02	Public Space 1	1596 x 2085	N/A	2no 762 x 1981 44mm thick Firefield	DD-1	Fire Rated Clear Toughened Safety Glass	FD30S	YES	SC + ED	N/A	16x69mm MDF Rounded or Chamfered	Firefield Ref: FCX326	Painted finish [white]	FAIL CLOSED
D0.08/01	Cleaners Store	832 x 2085	N/A	762 x 1981 44mm thick Firefield	RHS-O	N/A	FD30S	YES	N/A	N/A	16x69mm MDF Rounded or Chamfered	Firefield Ref: FCX326	Painted finish [white]	n/a
D0.07/01	Parish Store	756 x 2085	N/A	686 x 1981 44mm thick Firefield	LHS-S	N/A	FD30S	YES	N/A	N/A	16x69mm MDF Rounded or Chamfered	Firefield Ref: FCX326	Painted finish [white]	n/a
D0.09/02	Boiler Cupboard	756 x 2085	N/A	686 x 1981 44mm thick Firefield	LHS-O	N/A	FD30S	YES	N/A	N/A	16x69mm MDF Rounded or Chamfered	Firefield Ref: FCX326	Painted finish [white]	n/a
D1.06/01	First Floor Male WC	680 x 2085	N/A	610 x 1981 39mm thick	LHS-S	N/A	N/A	N/A	N/A	N/A	16x69mm MDF Rounded or Chamfered	Firefield Ref: FCX326	Painted finish [white]	n/a
D0.13/01	Understair Storage	Existing	N/A	Existing	RHS-O	N/A	FD30S	YES	N/A	N/A	16x69mm MDF Rounded or Chamfered	Firefield Ref: FCX326	Painted finish [white]	n/a
D0.05/01	Public Space 2	Existing	N/A	Existing	RHS-S	Existing to remain	FD30S	YES to be added	SC + ED	N/A	16x69mm MDF Rounded or Chamfered	Firefield Ref: FCX326	Painted finish [white]	FAIL CLOSED
D0.10/01	New Book Store	To be measured on site	N/A	To be measured on site	RHS-S	N/A	FD30S	YES	N/A	N/A	16x69mm MDF Rounded or Chamfered	Firefield Ref: FCX326	Painted finish [white]	n/a

* Sizes of these doors to be determined by exact width of existing walls / frames. These sizes are to be checked prior to manufacture


Glazing Modules
O - Obscured Glazing

Glazing Modules
G1 - Toughened
G2 - Obscured Toughened
G3 - Louvered
G4 - Fire Rated Clear Toughened Safety Glass

Operation
F - Fixed
T - Teleflex
P - Pole
A - Automatic
M - Manual
MDH - Manual with Magnetic Door Holders to release on alarm sound

Restrictors in accordance with HTM55
To prevent falls from windows

All dimensions to be confirmed on site prior to fabrication.

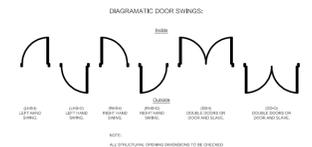

All sizes shown are structural opening sizes.
All dimensions to be confirmed on site prior to fabrication.

Means of escape

All doors fitted with emergency exit devices (horizontal push bars or push pads) should have the method of operation clearly indicated and provided with a sign conforming to the Health and Safety (Safety, Signs and Signals) Regulations 1996.

Emergency fastenings should consist of a simple device, which is easily operable in the event of an emergency. Compliance with BS EN 1125 Panic exit devices operated by a horizontal bar and/or BS EN 179 Emergency exit devices operated by a lever handle or push pad are methods of satisfying this requirement.